

BALON



Ball Valves - Floating Series LM Page B-7

This carbon steel threaded end ball valve is available in ½" through 1". Stainless steel ball and stem are standard. Rugged valve for pressures up to 3,000 PSI WP.





Ball Valves - Floating Series F Fractional Pages B-8 & B-9

Available in ¼" through 1"- 3000 PSI. Also offered in LF2 forged steel for low-temp service to -50° F. NACE standard.





Ball Valves - Floating Series LS Page B-33

Available in ¼" through 1", this solid 316 stainless steel ball valve is the solution for corrosive applications. Pressures are up to 3000 PSI. It is widely used in odorant applications.





Ball Valves - Floating Series S Threaded / Grooved Pages B-10, B-23, B-25, B-26, B-27, B-29, & B-31

Available in 1" through 6" in a variety of threaded/grooved end combination configurations, including the industry's first truly full port grooved end ball valve. Up to 5000 PSI WP and available in carbon steel, ductile iron, and "9D" nickel aluminum bronze.





Ball Valves - Floating Series F Threaded / Grooved Pages B-11, B-24, B-30, & B-32

Available in sizes from 1" through 4", with pressures up to 5000 PSI WP. Offered in carbon steel, "9D" nickel aluminum bronze and ductile iron. Also available in LF2 for low-temp service to -50° F.





Ball Valves - Floating Series F Flanged End Lever Operated Pages B-12, B-14, B-16, B-18, & B-28

Available in sizes up to 6" and offered in ANSI 125, 150, 300, 600, 900 and 1500 pressure classes. This valve is available in ductile iron and carbon steel. Also available in LF2 for low-temp service to -50° F.





Ball Valves - Floating Series F Gear Operated Pages B-13, B-15, B-17, & B-19

Balon includes gear operators as a standard feature in 6" full port and larger in ANSI 150 and 300 classes, 4" full port and larger ANSI 600 classes, and 3" full port and larger ANSI 900 class valves. Also available in low-temp service to -50° F.





Ball Valves - Trunnion Series T Trunnion Mounted Pages T-4 through T-11

Available in 10" and 12" full port ANSI 150, 8" through 12" full port ANSI 300, 4' through 12" ANSI 600, and 4" ANSI 900. All in carbon steel standard, carbon steel NACE and stainless steel NACE trim configurations. Also available in low-temp at -50° F to 250 F.



Balon's

Ball Valves - Floating Series US UTILI SEAL Ball Valve

Pages B-20 & B-21

Balon's weld x weld and weld x flange are designed for buried service and feature patented heat dissipating fins, heavy duty stops, and rugged forged steel components. Available in sizes 2" through 6" in ANSI 150 and ANSI 300 classes.

Locking devices and 2" square operating nut are standard.





Table of Contents

| Balon: History | 4-5 |
|--|------|
| Why Balon is American Made | 6 |
| The Balon Mission | 7 |
| Leading the Pack Through Innovation | 8 |
| Safety Is No Accident: We Do It By Design | 9 |
| Balon Quality | 10 |
| Global Customer Support | 11 |
| Ball Valves - Floating | B-1 |
| Trunnion Ball Valves | T-1 |
| Gear Operator | G-´ |
| Actuation Mounting Package | A-1 |
| Test and Tap Valve | TT-1 |
| Freeze Resistant Uni-Directional Ball Valve Option | F-1 |
| Swing Check Valves | C-1 |
| Needle Valves | N-1 |
| Terms and Conditions | TC-1 |



Ball Valves - Test and Tap Valve Threaded Page TT-1 & TT-2

Available in 1", 1 1/2" or 2" M x F NPT. Intergral 1/4" or 1/2" ball valve that allows a myriad of uses. 3000 PSI WP.



This top entry swing check valve is available in ductile iron, carbon steel and "9D" nickel aluminum bronze, in sizes 2" through 4", up to 2500 PSI WP. NACE and Stainless steel discs are standard.

Swing Check Valves Series C Threaded / Grooved Page C-12

Ball Valves - Test and Tap Valve

Available in 2", 3", 4", 6", 8", 10", and 12" in 150, 300, and 600 ANSI Class. Sports an integral

ball valve and designed so used where bleed

NACE and 316 stainless steel disc are standard. Available in sizes 1" through 3", in carbon steel, ductile iron and "9D' nickel aluminum bronze.

Swing Check Valves Thin and Long Pattern Wafer Pages C-15 & C-16

With sizes ranging from 2" through 6", Balon's long and thin pattern wafer check valves are available in "hard to find" larger port sizes. NACE and a replaceable stainless steel disc are standard. Sturdy, rugged forged steel body construction. Also available with stainless steel seats.

Swing Check Valves Series C Flanged End Pages C-17 through C-19

This flanged end carbon steel valve is available in sizes 2" through 6" ANSI Class 150, 300, and 600 with a working pressure of 285, 740, and 1480 respectively. NACE and stainless steel are standard, and the seat and disc module are completely replaceable.



Needle Valves Resilient Seated Pages N-4 & N-6

This 6,000 PSI needle valve is built with precision metering in mind. It features a bonnet locking shroud and an innovative split seat design with integral lugs to prevent rotation. This valve is available in both carbon steel and stainless steel. 316 stainless steel stems are standard.

Needle Valves Metal Seated Pages N-5 & N-7

This 10,000 PSI needle valve uses an indirect globe style flow path to allow for delicate adjustment at high pressures. This valve is available in both carbon steel and stainless steel. 316 stainless steel stems are standard.



Flanged

rings are used.

Pages TT-3 & TT-4













Balon: History



Domer Scaramucci stands next to his father, Tito, sister Rosa Jean, brother, Tullio and mother, Zenaide. Dow, Oklahoma 1925.

Although Balon Corporation was founded in 1965, our story really begins in December 1911 with the birth of our founder, Dominico "Domer" Scaramucci, at the No. 4 Mining Camp near Dow, Oklahoma. His parents were Italian emigrant miners who instilled in him a work ethic and hopefulness that lasted a lifetime.

With an Oklahoma oil boom under way in the early 1930s, Domer pursued mechanical engineering studies at the University of Oklahoma, often hitchhiking to field locations to observe activity. When, owing to the Great Depression, Domer interrupted his studies to spend two years working for what was then a small company in Duncan, Oklahoma: Halliburton. On weekends he journeyed into the field with cementers, roustabouts, and roughnecks. By 1938, Domer was able to complete his degree at OU. On September 13, 1941, Domer married llene Wilkinson, who became a lifelong partner in his business activities.

Mr. Scaramucci had a successful career designing and licensing products for other manufacturers. Many of his designs had become industry standards by the time Balon was established 1965. At the age of 54, at a time when most are thinking of retirement, he and llene embarked on what was a lifelong dream. Balon Corporation was launched in a 4,000-square-foot steel building on the corner of SE 32nd and Hattie Avenue in Oklahoma City, Oklahoma.

The average price of oil was around \$3.00



Domer Scaramucci standing in front of the original building.

a barrel in 1965. There was little primary oil development in America, but salt water injection projects were plentiful. Consequently, Balon's first products were corrosion resistant ductile iron ball valves and, later, aluminum bronze ball valves. These valves included features for which Balon would become known, including Multi-Seal seats and internally loaded, blowout-proof stems. In 1969, with Balon showing growth potential, the Scaramuccis hired Bill Shea as general manager. The Scaramuccis sons also joined the company as full time employees, Phil in 1969 and Jay in 1971.

With product line expansion, a strong marketing effort and increasing demand for Balon products, Balon grew throughout the 1970s. By 1978, four additions had been made to the original manufacturing plant, including a two-story, 10,000-square-foot office building. Balon's footprint along South Hattie Avenue increased to 95,000 square feet and there were 90 full-time employees.

1980 started with a boom. Oil prices were at an all-time high and the industry was buzzing. But oil prices peaked in 1981 and started to fall. The Penn Square Bank collapse in July 1982 reverberated from one side of the country to the other. It was a tough time in America's oil and gas industry. Many valve manufacturers had begun to reduce expenses by cutting back on their domestic operations, choosing instead to manufacture overseas or import their products into the U.S.

BALON

Balon refused to participate in this trend! We focused on process improvements and new product development. Though at one point our hourly employees worked only two weeks per month, they were paid a full month's wage and there were no layoffs. Balon's focus paid off. With the strong demand for better valves and the support of an excellent group of domestic suppliers, Balon continued to expand its manufacturing facilities in Oklahoma City. By decade's end, Balon's plant had grown to 139,600 square feet with about 100 employees.



Domer Scaramucci - 1990


In the early 1990s, crude oil prices were trending lower as oil imports increased. Exploration and production companies began turning to natural gas production as advanced recovery methods were developed. Realizing that superior quality was needed, many companies began to standardize formally on Balon products. That set the stage for a sustained surge in growth at Balon Corporation. By the turn of the millennium, Balon's manufacturing plant covered 240,000 square feet with 164 employees.

Sadly, Domer Scaramucci passed away in December 1995. To the end, he remained at the heart of the daily activity of the company. Ilene

continued to be a visible presence at Balon until her own death in 2009.

In the years after the turn of the century, Balon has added significantly to its manufacturing space and continued to expand its product line. From the original 4000-square-foot metal building at the corner of South Hattie Avenue and SE 32nd Street, a building that still stands as a daily reminder of our humble beginning, Balon has grown to become a modern manufacturing facility encompassing, at present, 1.4 million square feet.

We employ approximately 1,000 persons in manufacturing and operate approximately 1,500 machines. More than 60 Balon field representatives make thousands of customer contacts around the world each year.

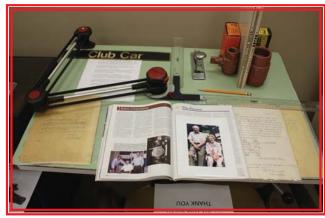

Items from Balon Museum

We wish to thank our loyal end users, the distributors who have supported them and us, our outstanding network of domestic raw materials suppliers, and our employees, whose dedication and integrity have permitted us to successfully pursue our founder's mission. Our founder's innovative spirit and perseverance will continue to guide us as we look to the future.

5





Why Balon is American Made



Some may ask, "Why are Balon Valves made in America?"

We believe the proper question is, "Why would Balon want to manufacture valves anywhere else?"

The heart of America is where Balon humbly opened its doors, in 1965, on a 4000-square-foot shop that employed three persons.

America is where Balon grew, building safer, more rugged, maintenance-free valves that comprise domestic content only.

Prospective employees came to our door, in America, asking for an opportunity to join their futures to ours by becoming skilled craftsmen in our manufacturing plant.

Outstanding domestic foundries and forging houses respectfully asked to build relationships with us.

It was American valve users who first came to recognize that Balon Corporation provides an unmatched combination of product integrity and customer support.

Now, here in America, more than five decades after our founding, Balon's manufacturing plant has grown to 1,500,000 square feet. We have brought together an excellent group of domestic raw materials

suppliers who understand our insistence on quality and performance. We have approximately 1,000 dedicated employees who spare no effort to manufacture valves that meet our customers' highest expectations. Why change a winning formula?

Balon's diverse work force embodies skills, traditions, and a work ethic with origins around the globe. We honor and respect their cultures and the cultures of all countries. In fact, today, Balon sells and services valves in all regions of the world.

There was a time when "Made in America" meant exactly that. Now, to some, it means something less. It means, perhaps, importing components for final assembly within the borders of the United States.

Let's be clear. At Balon, "Made in America" means what it ought to mean. It means ordering raw materials from domestic foundries and forging houses only. It means standing firmly by our tradition of manufacturing valves that are designed, machined, assembled, and tested, from start to finish, in our own plant in Oklahoma City, Oklahoma.

Settle for nothing less. Specify Balon by name.

6 12.2019.Rev.1



The Balon Mission

1,500,000 sq ft manufacturing facility and 1,000 employees strong



To assure growth for the Company and opportunity for all employees, it shall be our dedicated aim to:

- Produce valves with the safety of those who use them as our uppermost and defining goal.
- perform as promised, at a price reflective of their true value to the user.
- Meet the needs of our customers by maintaining a worldwide distributor network and a full-time staff of factory trained valve professionals in strategic geographical locations.
- Respond promptly and courteously to all customer and distributor inquiries, questions, and problems.
- Provide our customers with valves that
 Make certain that all Balon employees understand and implement our commitment to customer attention and customer satisfaction.
 - Treat our vendors, customers, distributors and employees with equanimity and honesty.





12.2019.Rev.1



Leading the Pack Through Innovation



By the time Domer Scaramucci founded Balon Corporation in 1965, he had already set the standard for valve technology with his patented valve designs for the oil and gas industry. Driven by a spirit for innovation with an emphasis on safety, he laid the ground work for the company that Balon has become today.

Balon's commitment to deliver the benefits of valve engineering and innovation to our customers is reflected through over two hundred patents that we have been issued throughout the United States and

Canada. Our founder's influence on our design engineers continues today as we increase our patent portfolio at an average rate of five patents per year.

Balon has secured a distinguished reputation as an unprecedented innovator of design advances that have become industry standards in ball, check and needle valves. We were first to develop many of the design enhancements that are the features of high quality valves and will continue to "Lead the Pack" through innovative design and state of the art manufacturing methods.

8



Safety is No Accident: We do it by Design

At Balon, safety and quality are uppermost in our minds when we design and build valves. This commitment is reflected in the fact that Balon has produced over five decades of injury free service for countless users throughout the world.



Founder - Domer Scaramucci

We didn't achieve this exceptional safety record by avoiding tough applications. Instead, our safety record is the intentional result of a concerted effort to address possible hazards in the way we design and manufacture valves with an inherent margin of safety that surpasses others on the market.

A Balon valve should never be the cause of any accident. In each design change we pursue, we remain aware that our valves are integral to the safety of an operation, whether that operation is large or small. The fire safe features that are included in every Balon ball valve are a prime example of this philosophy.



In our design and manufacture of valves, we will always remember that our exceptional safety record is the pinnacle of our success.



12.2019.Rev.1



Balon Quality



It is Balon's goal to achieve customer satisfaction by providing valve products of clearly superior quality.

At Balon, superior products begin with innovative designs and quality, domestic raw materials. Balon cultivates long-term relationships exclusively with domestic suppliers who share our commitment to product integrity.



Raw materials are brought into our own manufacturing plant for processing. By taking full responsibility for the processing of all raw materials, Balon exercises total control over the Quality Assurance "QA" process. We have a plan for the inspection of every component following each machining operation. Tight tolerance bands are maintained in order to achieve dimensional consistency from part to part and from valve to valve.

We take an "eyes open" approach to quality at Balon. All employees - whether they are machining components, assembling valves, or painting and boxing valves - all employees must keep their eyes open to any situation that might compromise quality.

As important as QA is within our plant, our concern for quality does not stop at Balon's shipping dock. Dozens of Balon representatives sustain our commitment through thousands of customer contacts around the world every year. Customer feedback through our representatives helps us to achieve one of our primary objectives as a company, that of continuous product improvement.

Balon Corporation is licensed by the American Petroleum Institute to the API-6D Standard and by Bureau Veritas to Module H of the Pressure Equipment Directive (PED). Our QA program complies fully with the API Q1 Quality Standard.

At Balon Corporation, Quality Assurance is not merely a process. It is a culture that has been nurtured within our company from the beginning.

10 12.2019.Rev.1



Global Customer Support



We understand that Balon products are expected to perform at the highest level in terms of safety and operation and to do so in a way that delivers maximum value to the end user. If our customers are to achieve the lowest cost of valve ownership, they must have the ability to communicate directly with factory representatives who are dedicated to complete customer satisfaction.

Balon employs full time, non-commissioned valve professionals who call on customers throughout the world, concentrating on the development of long-term relationships with valve distributors and valve owners.

Now and in the future, our distributors and product owners can rely on the prompt, personalized service that Balon has become known for.

For information regarding the nearest Balon representative or Balon distributor, please contact our factory in Oklahoma City by phone at (405) 677-3321, or by email at sales@balon.com.

12.2019.Rev.1 11


Floating Ball Valves



FLOATING BALL VALVES


| ALON FLOATING BALL VALVES | B-1 |
|---|---|
| BALL VALVE IDENTIFICATION KEY | B-2 |
| INTRODUCTION The Balon Valve: Totally Advanced Multi-Seal: The Heart of the Valve An Advanced Concept in Stem Design A More Complete Solution to Fire Safety | B-3 B-4 B-5 B-6 |
| CARBON STEEL VALVES Female Threaded End Connection Flanged End Connection Weld x Flange Connection Weld x Weld Connection Threaded End Connection Socket Weld | B-7 - B-11 B-12 - B-19 B-20 B-21 B-22 |
| Female x Female Threaded End Connection Male x Female Threaded End Connection Male Threaded x Grooved End Connection Female Threaded x Grooved End Connection Grooved x Grooved End Connection Flanged End Connection | B-23 - B-24 B-25 B-25 B-26 B-27 B-28 |
| "9D" NICKEL ALUMINUM BRONZE VALVES Female x Female Threaded End Connection Grooved x Grooved End Connection | B-29 - B-30 B-31 - B-32 |
| STAINLESS STEEL VALVES Female Threaded End Connection | B-33 |
| BALL VALVE ACCESSORIES Handles Chain Darts 2" Square Operating Nuts Actuation Mounting Package Hardware | B-34 A-1 |
| TECHNICAL INFORMATION | B-35 - B-37 |

Floating Ball Valve Identification Key

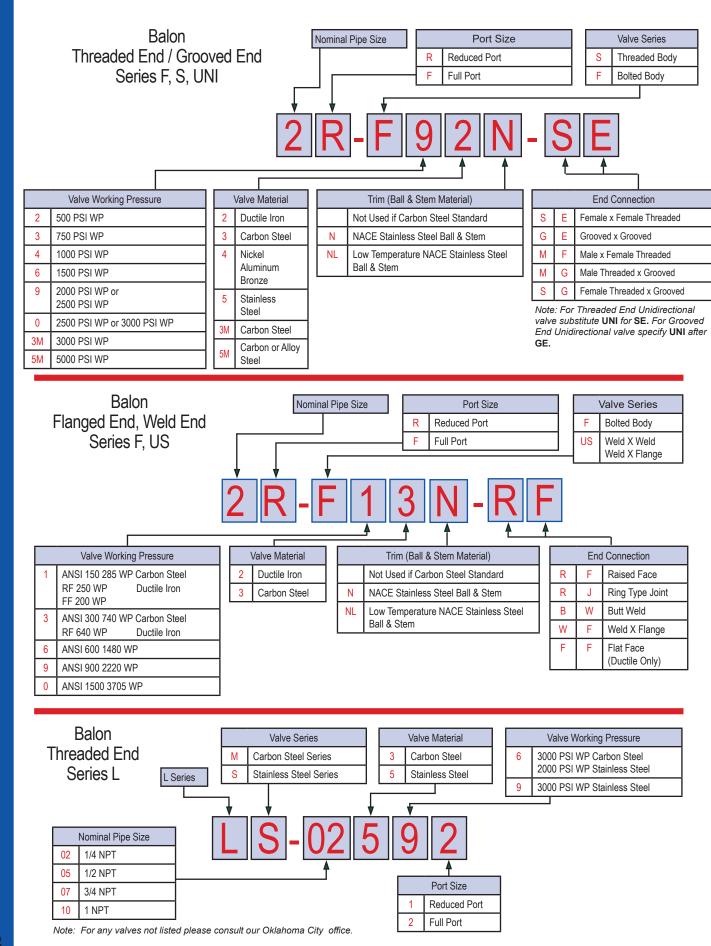

Ball Valve Cut-A-Way

The Balon Valve: Totally Advanced

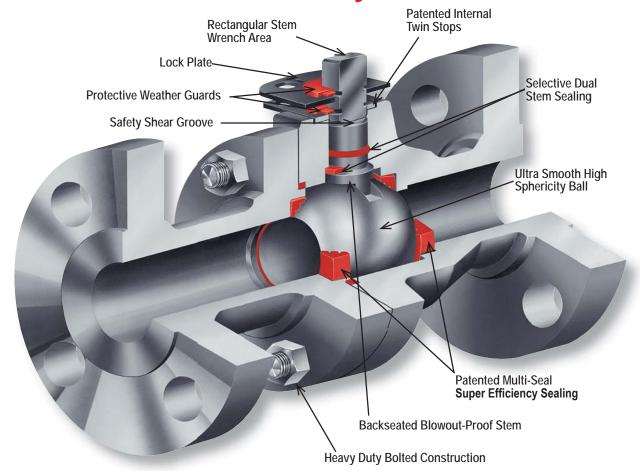

Unique Sealing Approach

The Balon Ball Valve is the culmination of many years of arduous design and development effort which has been focused on providing a better choice in ball valves. It is a refinement of features proven superior during the use of Balon Ball Valves in thousands of installations since 1965.

The multi-seal seat design has given impetus to the development of an overall valve which embodies several design improvements.

Backseated Stem

Stems are backseated and blowout proof. And, they provide metal-to-metal backup sealing in the event of a fire. This secondary metal-to-metal sealing is also provided internally behind the seat area.

Simplified Top Works

Bolts and glands and complicated stem assemblies are totally absent in the Balon valve to assure a simpler, more trouble-free valve.

Hazards associated with bolted stem retainer and packing adjustment screws or bolts have been

eliminated. Even the stops are internal and give dual precise stopping support during opening and closing. The stem area is grease-packed and protected by dual plastic weather guards to shield this vital area from external elements thereby eliminating the need for maintenance in the field.

Emissions Tested - API 641

Balon valves successfully completed low emissions testing. Call Oklahoma City plant for details.

Precise Manufacturing Control

Balon uses only the highest quality materials to assure the strength and uniformity necessary for applications where valves are used. To further enhance the overall operational superiority of the valve, all balls are machined in-house by Balon's spherical machining process which assures a consistently accurate spherical contour. They are superbly finished and polished. This high integrity finish, along with multi-seal's advanced sealing capability, provides the highest sealing efficiency and substantially reduced operating torque.



Multi-Seal

Multi-Seal: The Heart of the Valve

Notice the grooves. These grooves loosely receive any grit that might be present when the valve is closed. When the valve is opened, the foreign matter washes harmlessly away, where an ordinary valve seal could have been scored across its entire surface. Balon's seal is good as new.

Notice the seal rings. Not just one ring...a series. That's where Multi-Seal gets another big sealing edge over plain seals. The rings assure a concentrated seal, providing a bubble tight seal at high and low pressures, the tighter the seal...the better the shut-off.

Notice the tapered outer walls. These tapered walls on the Multi-Seal provide automatic seal-to-ball tensioning and self adjustment to wear. Much longer life and complete trouble-free performance is what you get. That's why you don't need a repair kit.

How long will the Balon Multi-Seal last? Our sales records of replacement seats indicate that most Balon valves sold have provided many years of trouble-free performance.

It has been tested on water pumped at 1,000 psi operating pressure with shock loading on shutoff up to 1,800 psi. After a million shutoffs, it still sealed bubble tight.





Ordinary Seals are damaged during shutoff. As flow is squeezed through fine-line opening, foreign particles are trapped. Complete shutoff grinds them into the seal. Results: premature damage, leakage, valve failure.



Multi-Seal receives particles loosely in grooves, to be washed harmlessly away during next opening. Valve seals bubble tight again, through repeated shutoffs.



Multi-Seal's series groove design features blunt-edge seal members for superior sealing efficiency. And the grooves form supertight "fluid seal rings." Each seal member, working with the next one, creates exclusive "staged differential pressure sealing," for the tightest shutoff possible at all pressures.



Multi-Seal
adjusts itself
to wear! Outer
walls are tapered
to permit selfcompensation to
valve load and
seal engagement
demand. The
design permits
thrust loading to
realign seat toward
optimum sealing
engagement.




The Multi-Seal design permits selection of seal material best suited to abrasive, high and low pressure applications in toughest services. And the relief pockets formed by the tapered walls, with the series grooving, provide self-compensation for swell to permit easy turning, longlife operation. It takes a better seal to make a better valve...and the best ball valve is a Balon.



Stem Design

An Advanced Concept in Stem Design

Balon has eliminated the need for grease fittings, lube channels, and regular lubrication.

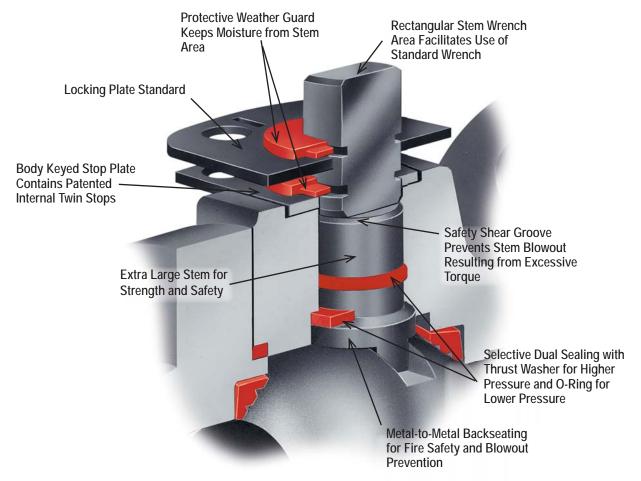

In keeping with Balon's philosophy of design which envisions simplification and improvement instead of improvement by complication, the Balon stem design solves many problems associated with the common stem design. The overall utility of the ball valve is related in no small way to the basic stem design. Certain standard designs originated early and were followed through by ball valve manufacturers in the years following the advent of the ball valve itself during World War II.

The Balon Stem: New Solutions For Old Problems

The Balon design represents the result of a total attack on specific problems associated with the outdated design. In the past, it has been a frequent practice to retain stems by use of external bolts or screws. Often these bolted arrangements also provided stem packing adjustment. The problem of leaking stems was amplified because of the complexity of the assembly itself.

The absence of backseating in early designs opened the way for stem blowout in the event of failure of the retaining assembly or as a result of forcible operation of the valve.

In many former designs, double O-rings were incorporated on the theory that should one O-ring fail to seal, then the second O-ring would perform the sealing job. However, higher pressures trapped between the O-rings often caused high operating torque and other operating problems.

Emissions Tested - API 641

Balon valves successfully completed low emissions testing. Call Oklahoma City plant for details.


A Combination of Improvements


As shown here, the Balon design is simple, yet solves these problems. The clean, functional design of the stem assembly represents dramatic improvement in many ways over conventional designs. As is true of the overall Balon approach, the Balon stem does not present just one special modification or design innovation. Rather, it represents the bringing together of interrelated improvements, resulting in total improvement and total superiority.



Ball Valve Fire Safety

A More Complete Solution to Fire Safety

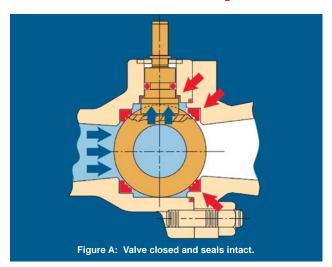

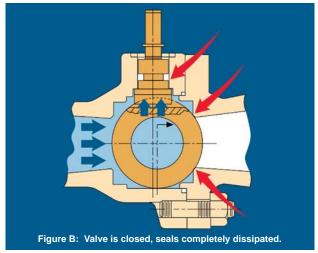

After many years of development and testing, Balon patented and introduced a ball valve that represented a dramatic turning point in valve safety. It was the first ball valve with the following:

- Backseated stem to prevent stem blowout
- Packless stem gland housing which eliminates stem adjustment mechanisms
- Stem shear groove to assure controlled stem damage above the backseat
- Full Metal spectrum fire safety for metal-to-metal secondary sealing at all potential leak points

Balon then encased these safety improvements in a rugged bolted body assembly capable of withstanding violent thrust loading and line stresses so common in high-pressure line applications.

Fire safety in ball valves has become a major consideration as more and more ball valves have been used in hazardous environments.

The Balon Ball Valve has been designed to provide maximum backup sealing in the event resilient seals are destroyed by heat or fire.

Controlled Spacing

The interior components of the valve, with seals intact, can be seen in Figure "A". In the closed position the ball is held off of the secondary metal seat position.

The seat and seat pocket are made oversize in radial dimension, allowing close spacing of the ball and metal seat provision. In operation, with prime seals in place, this controlled spacing prevents damage to the surface finish of the ball.

It can also be seen that the stem is backseated, and with seals in place the primary stem seal holds the stem off of the metal shoulder machined in the valve body.

In figure "B", the seals have been fully dissipated, the ball has moved downstream onto the secondary metal seat, and the stem has been checked, metal-to-metal, against the inner shoulder.

As can be seen, the stem is free to move upward when subjected to a slight amount of pressure, onto the machined metal inner shoulder, thus substantially restricting any flow past the stem into the atmosphere.

Straight Ahead Ball Movement

The stem tongue is keyed into a linear milled slot, straight and perpendicular to the bore of the valve. In the closed position, the ball is free to move downstream onto the secondary metal seating, functioning at that moment as a simple ball check valve.

The ball itself is confined in the body with just enough vertical and horizontal clearance to assure free and easy operation. This keeps the ball in uniform alignment so that ball movement onto backseating - should it become necessary - is consistently on a straight course, without deflection up, down or sideways.

The valve may be positioned in either vertical or horizontal installations, and retain its secondary metalto-metal sealing capability.

These very simple provisions are intended to provide full operational safety in our valves. Every attempt has been made in our design to produce a valve that is safe and affordable.

Balon Ball Valves have been successfully tested by an independent laboratory in accordance with API Standard 6FA "Fire Test for Resilient Seated Ball Valves". Results of this testing are available on request from Balon's headquarters.




Series LM Carbon Steel

- **Lever Operated Ball Valve**
- 3000 PSI WP
- 1/4" Through 1"
- Bolted Body Construction
- Meets API 641 Emissions Standard
- Multi-Seal Seats
- 316 Stainless Steel Ball and Stem Standard
- Locking Device Standard
- Maintenance Free
- Fire Safe Design

Material Description

| ITEM | PART NAME | MATERIAL (STANDARD) |
|------|---------------|----------------------|
| 1 | Weather Guard | Polyethylene |
| 2 | Stem Nut | Carbon Steel |
| 3 | Spacer | Carbon Steel |
| 4 | Lock Plate | Carbon Steel |
| 5 | Handle* | Carbon Steel |
| 6 | Stem Washer | Acetal |
| 7 | Stop Pin | Carbon Steel |
| 8 | Stem O-Ring | Buna-N |
| 9 | Stem Seal | TFE |
| 10 | Stem | 316 Stainless Steel |
| 11 | Body | AISI 1215 |
| 12 | Ball Seat | Nylon (TFE Optional) |
| 13 | Ball | 316 Stainless Steel |
| 14 | Body Seal | Buna-N |
| 15 | End Adapter | AISI 1215 |
| 16 | Body Bolts | ASTM A193 B7M |


^{*} Handle and lock device are standard on all Series LM Ball Valves.

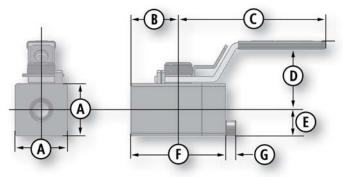

| SIZE | CATALOG NUMBER STANDARD TRIM 316 SS BALL & STEM | PORT | Α | В | С | D | E | F | G | LBS. | Cv |
|-------------|---|------|------|------|------|------|------|------|-----|------|----|
| .25x.37x.25 | LM-02362 | .37 | 1.25 | 1.12 | 3.50 | 1.62 | 0.62 | 2.25 | .25 | 1.0 | - |
| .50x.37x.50 | LM-05361 | .37 | 1.25 | 1.12 | 3.50 | 1.62 | 0.62 | 2.25 | .25 | 1.0 | 6 |
| .75x.75x.75 | LM-07362 | .75 | 2.0 | 1.81 | 4.87 | 2.25 | 1.0 | 3.62 | .37 | 3.5 | - |
| 1v 75v1 | I M-10361 | 75 | 2.0 | 1 21 | 1 27 | 2 25 | 1 0 | 3.62 | 27 | 3.5 | 30 |





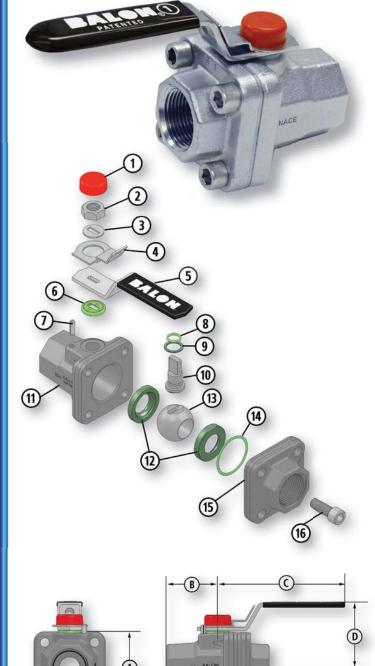

Series F Carbon Steel

- NACE Standard
- Lever Operated Ball Valve
- **3000 PSI WP**
- 1/4" Through 1"
- Bolted Body Construction
- Meets API 641 Emissions Standard
- Forged Body and Adapter
- Rugged Bolted Construction
- Low-Torque Operation
- Multi-Seal Seats
- Maintenance Free
- Fire Safe Design

Material Description

| | | <u> </u> | | | | | |
|------|---------------|------------------------------------|--|--|--|--|--|
| ITEM | PART NAME | MATERIAL (NACE) | | | | | |
| 1 | Weather Guard | Polyethylene | | | | | |
| 2 | Stem Nut | Carbon Steel | | | | | |
| 3 | Spacer | Carbon Steel | | | | | |
| 4 | Lock Plate | Carbon Steel | | | | | |
| 5 | Handle | Carbon Steel | | | | | |
| 6 | Stem Washer | Acetal | | | | | |
| 7 | Stop Pin | Carbon Steel | | | | | |
| 8 | Stem O-Ring | Fluorocarbon | | | | | |
| 9 | Stem Seal | TFE | | | | | |
| 10 | Stem | 316 Stainless Steel | | | | | |
| 11 | Body | ASTM A105, Normalized/A350 LF2 CL1 | | | | | |
| 12 | Seat | Nylon (TFE Optional) | | | | | |
| 13 | Ball | 316 Stainless Steel | | | | | |
| 14 | Body Seal | Fluorocarbon | | | | | |
| 15 | End Adapter | ASTM A105, Normalized/A350 LF2 CL1 | | | | | |
| 16 | Body Bolts | ASTM A193 B7M/ A320 L7M | | | | | |

^{*} Handle and lock device are standard.

| | SIZE | CATALOG NUMBER NACE TRIM 316 SS BALL & STEM | PORT | WP | Α | В | С | D | E | F | LBS. | Cv |
|---|------------------|--|------|------|------|------|------|------|------|------|------|----|
| I | .25 x .375 x .25 | 1/4F-F03N-SE | .37 | 3000 | 1.75 | 1.12 | 3.50 | 1.88 | 0.88 | 2.25 | 1.0 | - |
| I | .50 x .375 x .50 | 1/2R-F03N-SE | .37 | 3000 | 1.75 | 1.19 | 3.50 | 1.88 | 0.88 | 2.38 | 1.0 | 6 |
| ĺ | .50 x .50 x .50 | 1/2F-F03N-SE | .50 | 3000 | 1.92 | 1.38 | 3.50 | 1.96 | 0.96 | 3.00 | 3.3 | - |
| ĺ | .75 x .75 x .75 | 3/4F-F03N-SE | .75 | 3000 | 2.62 | 1.81 | 4.87 | 2.56 | 1.31 | 3.62 | 3.3 | - |
| ĺ | 1 x .75 x 1 | 1R-F03N-SE | .75 | 3000 | 2.62 | 1.88 | 4.87 | 2.56 | 1.31 | 3.75 | 3.3 | 30 |




Series F Carbon Steel


- LF2 CL1 Forged Steel for Low-Temp Service to -50° F
- **■** Lever Operated Ball Valve
- 3000 PSI WP
- **■** 1/4" Through 1"
- **■** Bolted Body Construction
- Meets API 641 Emissions Standard
- NACE Standard
- Forged Body and Adapter
- Rugged Bolted Construction
- Low-Torque Operation
- Multi-Seal Seats
- Maintenance Free
- Fire Safe Design

Material Description

| ITEM | PART NAME | MATERIAL (NACE) |
|------|---------------|----------------------|
| 1 | Weather Guard | Polyethylene |
| 2 | Stem Nut | Carbon Steel |
| 3 | Spacer | Carbon Steel |
| 4 | Lock Plate | Carbon Steel |
| 5 | Handle | Carbon Steel |
| 6 | Stem Washer | Acetal |
| 7 | Stop Pin | Carbon Steel |
| 8 | Stem O-Ring | Fluorocarbon |
| 9 | Stem Seal | TFE |
| 10 | Stem | 316 Stainless Steel |
| 11 | Body | ASTM A350 LF2 CL1 |
| 12 | Seat | Nylon (TFE Optional) |
| 13 | Ball | 316 Stainless Steel |
| 14 | Body Seal | Fluorocarbon |
| 15 | End Adapter | ASTM A350 LF2 CL1 |
| 16 | Body Bolts | ASTM A320 L7M |

^{*} Handle and lock device are standard.

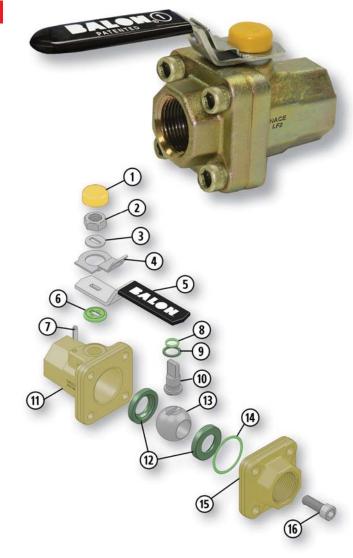

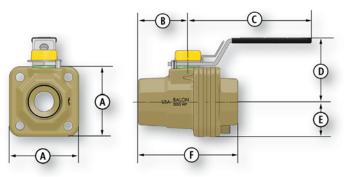

| SIZE | CATALOG NUMBER NACE TRIM 316 SS BALL & STEM | PORT | WP | Α | В | С | D | E | F | LBS. | Cv |
|------------------|--|------|------|------|------|------|------|------|------|------|----|
| .25 x .375 x .25 | 1/4F-F03NL-SE | .37 | 3000 | 1.75 | 1.12 | 3.50 | 1.88 | 0.88 | 2.25 | 1.0 | - |
| .50 x .375 x .50 | 1/2R-F03NL-SE | .37 | 3000 | 1.75 | 1.19 | 3.50 | 1.88 | 0.88 | 2.38 | 1.0 | 6 |
| .50 x .50 x .50 | 1/2F-F03NL-SE | .50 | 3000 | 1.92 | 1.38 | 3.50 | 1.96 | 0.96 | 3.00 | 3.3 | - |
| .75 x .75 x .75 | 3/4F-F03NL-SE | .75 | 3000 | 2.62 | 1.81 | 4.87 | 2.56 | 1.31 | 3.62 | 3.3 | - |
| 1 x .75 x 1 | 1R-F03NL-SE | .75 | 3000 | 2.62 | 1.88 | 4.87 | 2.56 | 1.31 | 3.75 | 3.3 | 30 |







Series S Carbon Steel


- To 5000 PSI WP
- 1" Through 2"
- Threaded Body Construction
- Meets API 641 **Emissions Standard**
- Available in Low-Temp Service to -50° F
- Multi-Seal Seats
- Fire Safe Design
- NACE Option With 316 Stainless Steel Ball and Stem Available
- Rugged Locking Device Standard Maintenance Free

| | Materiai L | escription |
|--------|---------------------------|---------------------------|
| T NAME | MATERIAL (STANDARD) | MATERIAL (NACE) |
| * | Carbon Steel/Ductile Iron | Carbon Steel/Ductile Iron |
| | | |

| ITEM | PART NAME | MATERIAL (STANDARD) | MATERIAL (NACE) | LOW TEMP (NACE) |
|------|------------------------|--------------------------------------|-----------------------------|-----------------------------|
| 1 | Handle* | Carbon Steel/Ductile Iron | Carbon Steel/Ductile Iron | Carbon Steel/Ductile Iron |
| 2 | Handle Bolt | Standard Hex Bolt | Standard Hex Bolt | Standard Hex Bolt |
| 3 | Weather Guard | Polyethylene | Polyethylene | Polyethylene |
| 4 | Lock Plate Retainer | Carbon Spring Steel | Carbon Spring Steel | Carbon Spring Steel |
| 5 | Lock Plate | Carbon Steel | Carbon Steel | Carbon Steel |
| 6 | Dust Cover | Polyethylene | Polyethylene | Polyethylene |
| 7 | Stop Plate Retainer | Carbon Spring Steel | Carbon Spring Steel | Carbon Spring Steel |
| 8 | Stop Plate | Carbon Steel | Carbon Steel | Carbon Steel |
| 9 | Stem O-Ring | Buna-N | Fluorocarbon | Fluorocarbon |
| 10 | Stem Seal | TFE | TFE | TFE |
| 11 | Stem | Carbon Steel | 316 Stainless Steel | 316 Stainless Steel |
| 12 | Ball | Carbon Steel Nickel Chrome Plated | 316 Stainless Steel | 316 Stainless Steel |
| 13 | Ball Seat | Nylon/Acetal (TFE Optional) | Nylon/Acetal (TFE Optional) | Nylon/Acetal (TFE Optional) |
| 14 | Body O-Ring | Buna-N | Fluorocarbon | Fluorocarbon |
| 15 | End Adapter** | ASTM A105, Normalized | ASTM A105, Normalized | ASTM A350 LF2 CL1 |
| 16 | Body** | ASTM A105, Normalized | ASTM A105, Normalized | ASTM A350 LF2 CL1 |





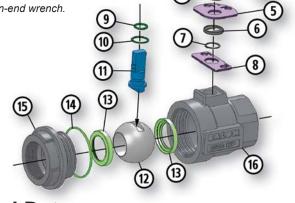

| | CATALOG NUMBER | | | | | | | | | | | | | | | | |
|---------|--|------------------------------------|-----------------------------------|------|------|-----|------|------|------|-----|------|------|-------|------|-----|-----------|-----|
| SIZE | STANDARD TRIM CARBON STEEL BALL & STEM | NACE TRIM 316 SS BALL & STEM | LOW TEMP 316 SS BALL & STEM | PORT | WP | A | В | D | Ε | F | G | Н | M | N | LBS | HANDLE | Cv |
| 1x1x1 | 1F-S03-SE | N/A | 1F-S03NL-SE | 1 | 3000 | 4.0 | 2.00 | 2.75 | 2.37 | .50 | .340 | .685 | 4.37 | 2.00 | 4.5 | P-333-CS | - |
| 2x1.5x2 | 2R-S93-SE | 2R-S93N-SE | N/A | 1.5 | 2500 | 5.5 | 2.75 | 4.25 | 3.62 | .75 | .434 | .873 | 7.25 | 5.25 | 14 | P-4128-CS | 125 |
| 2x1.5x2 | 2R-S03-SE | 2R-S03N-SE | N/A | 1.5 | 3000 | 5.5 | 2.75 | 4.25 | 3.62 | .75 | .434 | .873 | 7.25 | 5.25 | 14 | P-4128-CS | 125 |
| 2x1.5x2 | 2R-S5M-SE | 2R-S5MN-SE | N/A | 1.5 | 5000 | 5.5 | 2.75 | 4.25 | 3.62 | .75 | .434 | .873 | 10.25 | 5.62 | 14 | P-4129-CS | 125 |
| 2x2x2 | 2F-S93-SE | 2F-S93N-SE | N/A | 2 | 2500 | 6.0 | 3.12 | 4.87 | 4.37 | .75 | .497 | .998 | 10.25 | 6.20 | 20 | P-4129-CS | - |
| 2x2x2 | 2F-S03-SE | 2F-S03N-SE | N/A | 2 | 3000 | 6.0 | 3.12 | 4.87 | 4.37 | .75 | .497 | .998 | 10.25 | 6.20 | 18 | P-4129-CS | - |

^{*} Balon manufactured Actuation Mounting Hardware available. Please see page A-2 for details.



Series F Carbon Steel


- **■** Lever Operated Ball Valve
- To 5000 PSI WP
- 1" Through 4"
- **■** Bolted Body Construction
- Meets API 641 Emissions Standard
- Available in Low-Temp Service to -50° F
- Multi-Seal Seats
- Bolted Body Protects Against End Adapter Blowout
- Fire Safe Design
- NACE Option With 316 Stainless Steel Ball and Stem Available
- Rugged Locking Device Standard
- Maintenance Free


Material Description

| ITEM | PART NAME | MATERIAL (STANDARD) | MATERIAL (NACE) | LOW TEMP (NACE) | | | | |
|------|------------------------|--------------------------------------|-----------------------|----------------------|--|--|--|--|
| 1 | Handle* | Carbon Steel/Ductile | Carbon Steel/Ductile | Carbon Steel/Ductile | | | | |
| | | Iron | Iron | Iron | | | | |
| 2 | Handle Bolt | Standard Hex Bolt | Standard Hex Bolt | Standard Hex Bolt | | | | |
| 3 | Weather Guard | Polyethylene | Polyethylene | Polyethylene | | | | |
| 4 | Lock Plate Retainer | Carbon Spring Steel | Carbon Spring Steel | Carbon Spring Steel | | | | |
| 5 | Lock Plate | Carbon Steel | Carbon Steel | Carbon Steel | | | | |
| 6 | Dust Cover | Polyethylene | Polyethylene | Polyethylene | | | | |
| 7 | Stop Plate | Carbon Spring Steel | Carbon Spring Steel | Carbon Spring Steel | | | | |
| | Retainer | | | | | | | |
| 8 | Stop Plate | Carbon Steel | Carbon Steel | Carbon Steel | | | | |
| 9 | Stem O-Ring | Buna-N | Fluorocarbon | Fluorocarbon | | | | |
| 10 | Stem Seal | TFE | TFE | TFE | | | | |
| 11 | Stem | Carbon Steel | 316 Stainless Steel | 316 Stainless Steel | | | | |
| 12 | Ball | Carbon Steel Nickel Chrome Plated | 316 Stainless Steel | 316 Stainless Steel | | | | |
| 13 | Ball Seat | Nylon/Acetal | Nylon/Acetal | Nylon/Acetal | | | | |
| | | (TFE Optional) | (TFE Optional) | (TFE Optional) | | | | |
| 14 | Body O-Ring | Buna-N | Fluorocarbon | Fluorocarbon | | | | |
| 15 | End Adapter | ASTM A105, Normalized | ASTM A105, Normalized | ASTM A350LF2 CL1 | | | | |
| 16 | Body | ASTM A105, Normalized | ASTM A105, Normalized | ASTM A350LF2 CL1 | | | | |
| 17 | Body Bolts | ASTM A193 B7M | ASTM A193 B7M | A320L7M | | | | |

^{*}Handle is optional. Balon valves can also be operated with a standard open-end wrench.



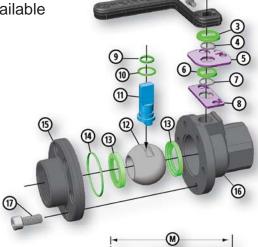




| | CA | TALOG NUMBER | | | | | | | | | | | | | | | | |
|-------------|--|------------------------------------|-----------------------------------|------|------|------|------|------|------|------|------|-------|-------|-------|------|------|-----------|--------|
| SIZE | STANDARD TRIM CARBON STEEL BALL & STEM | NACE TRIM 316 SS BALL & STEM | LOW TEMP 316 SS BALL & STEM | PORT | WP | А | В | D | Е | F | G | Н | J | M | N | LBS. | HANDLE | Cv |
| 1x1x1 | 1F-F93-SE | 1F-F93N-SE | N/A | 1 | 2500 | 3.87 | 1.93 | 3.37 | 2.37 | 0.50 | .340 | .685 | 1.12 | 4.37 | 2.00 | 4.3 | P-333-CS | \Box |
| 1x1x1 | 1F-F03-SE | 1F-F03N-SE | 1F-F03NL-SE | 1 | 3000 | 3.87 | 1.93 | 3.37 | 2.37 | 0.50 | .340 | .685 | 1.12 | 4.37 | 2.00 | 4.0 | P-333-CS | - |
| 1.5x1.5x1.5 | 1.5F-F03-SE | 1.5F-F03N-SE | N/A | 1.5 | 3000 | 5.25 | 2.62 | 5.12 | 3.62 | 0.75 | .434 | .873 | 1.62 | 7.25 | 5.25 | 12.8 | P-4128-CS | - 1 |
| 2x1.5x2 | 2R-F93-SE | 2R-F93N-SE | N/A | 1.5 | 2500 | 5.50 | 2.75 | 5.12 | 3.62 | 0.75 | .434 | .873 | 1.62 | 7.25 | 5.25 | 13.5 | P-4128-CS | 125 |
| 2x1.5x2 | 2R-F03-SE | 2R-F03N-SE | 2R-F03NL-SE | 1.5 | 3000 | 5.50 | 2.75 | 5.12 | 3.62 | 0.75 | .434 | .873 | 1.62 | 7.25 | 5.25 | 13.0 | P-4128-CS | 125 |
| 2x1.5x2 | 2R-F5M-SE | 2R-F5MN-SE | N/A | 1.5 | 5000 | 6.00 | 3.00 | 6.00 | 3.62 | 0.75 | .434 | .873 | 1.75 | 10.25 | 5.62 | 20.0 | P-4129-CS | 125 |
| 2x2x2 | 2F-F93-SE | 2F-F93N-SE | N/A | 2 | 2000 | 5.75 | 2.87 | 6.12 | 4.37 | 0.87 | .497 | .998 | 2.00 | 10.25 | 6.20 | 20.0 | P-4129-CS | - |
| 2x2x2 | 2F-F03-SE | 2F-F03N-SE | 2F-F03NL-SE | 2 | 2500 | 5.75 | 2.87 | 6.12 | 4.37 | 0.87 | .497 | .998 | 2.00 | 10.25 | 6.20 | 19.0 | P-4129-CS | - |
| 2x2x2 | 2F-F3M-SE | 2F-F3MN-SE | N/A | 2 | 3000 | 5.75 | 2.87 | 6.12 | 4.37 | 0.87 | .497 | .998 | 2.00 | 10.25 | 6.20 | 20.0 | P-4129-CS | - |
| 3x2x3 | 3R-F93-SE | 3R-F93N-SE | 3R-F93NL-SE | 2 | 2000 | 7.62 | 3.81 | 6.87 | 4.37 | 0.87 | .497 | .998 | 2.06 | 10.25 | 6.20 | 32.0 | P-4129-CS | 180 |
| 3x3x3 | 3F-F63-SE | 3F-F63N-SE | 3F-F63NL-SE | 3 | 1500 | 8.37 | 4.18 | 8.00 | 5.75 | 1.06 | .747 | 1.373 | 2.375 | 20.0 | 7.75 | 46.0 | P-4127-DI | - |
| 3x3x3 | 3F-F03-SE | 3F-F03N-SE | N/A | 3 | 3000 | 8.37 | 4.18 | 8.56 | 5.75 | 1.08 | .747 | 1.375 | 2.47 | 20.0 | 7.75 | 56.0 | P-4127-DI | - |
| 4x3x4 | 4R-F63-SE | 4R-F63N-SE | 4R-F63NL-SE | 3 | 1500 | 8.87 | 4.43 | 8 | 5.75 | 1.06 | .747 | 1.375 | 2.375 | 20.0 | 7.75 | 47.0 | P-4127-DI | 500 |





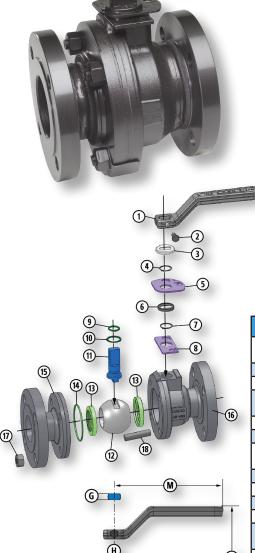

Series F Carbon Steel

- Lever Operated Ball Valve
- ANSI Class 150 (285 PSI WP)
- 1" Through 6"
- Bolted Body Construction
- Meets API 641 Emissions Standard
- Available in Low-Temp Service to -50° F
- Multi-Seal Seats
- Fire Safe Design
- NACE Option With 316 Stainless Steel Ball and Stem Available
- Rugged Locking Device Standard
- Maintenance Free

Material Description

| | ITEM | PART NAME | MATERIAL (STANDARD) | MATERIAL (NACE) | LOW TEMP (NACE) |
|-----|------|------------------------|--------------------------------------|-------------------------|-------------------------|
| Ī | 1 | Handle* | Carbon Steel/ | Carbon Steel/ | Carbon Steel/ |
| | | | Ductile Iron | Ductile Iron | Ductile Iron |
| Ī | 2 | Handle Bolt | Standard Hex Bolt | Standard Hex Bolt | Standard Hex Bolt |
| ı | 3 | Weather Guard | Polyethylene | Polyethylene | Polyethylene |
| | 4 | Lock Plate Retainer | Carbon Spring Steel | Carbon Spring Steel | Carbon Spring Steel |
| | 5 | Lock Plate | Carbon Steel | Carbon Steel | Carbon Steel |
| | 6 | Dust Cover | Polyethylene | Polyethylene | Polyethylene |
| | 7 | Stop Plate Retainer | Carbon Spring Steel | Carbon Spring Steel | Carbon Spring Steel |
| | 8 | Stop Plate | Carbon Steel | Carbon Steel | Carbon Steel |
| ı | 9 | Stem O-Ring | Buna-N | Fluorocarbon | Fluorocarbon |
| . [| 10 | Stem Seal | TFE | TFE | TFE |
| | 11 | Stem | Carbon Steel | 316 Stainless Steel | 316 Stainless Steel |
| | 12 | Ball | Carbon Steel Nickel Chrome Plated | 316 Stainless Steel | 316 Stainless Steel |
| | 13 | Ball Seat | Nylon 11 (TFE Optional) | Nylon 11 (TFE Optional) | Nylon 11 (TFE Optional) |
| | 14 | Body O-Ring | Buna-N | Fluorocarbon | Fluorocarbon |
| | 15 | End Adapter | ASTM A105, Normalized | ASTM A105, Normalized | ASTM A350 LF2 CL1 |
| | 16 | Body | ASTM A105, Normalized | ASTM A105, Normalized | ASTM A350 LF2 CL1 |
| . | 17 | Nuts | ASTM A194 2H | ASTM A194 2HM | ASTM A320 7M |
| | 18 | Body Bolts | ASTM A193 B7 | ASTM A193 B7M | ASTM A320 L7M |

^{*} Handle is optional. Balon valves can also be operated with a standard open-end wrench.

| SIZE | CATALOG N STANDARD TRIM CARBON STEEL BALL & STEM | NUMBER NACE TRIM 316 SS BALL & STEM | LOW TEMP 316 SS BALL & STEM | PORT | Α | В | D | Е | F | G | Н | M | N | LBS. | HANDLE | Cv |
|---------|---|--|-----------------------------------|------|------|------|------|------|------|------|-------|-------|------|------|-----------|-----|
| 1x1x1 | 1F-F13-RF | 1F-F13N-RF | 1F-F13NL-RF | 1 | 5.0 | 2.00 | 3.37 | 2.37 | 0.50 | .340 | 0.685 | 4.37 | 2.00 | 8.4 | P-333-CS | · 1 |
| 2x1.5x2 | 2R-F13-RF | 2R-F13N-RF | 2R-F13NL-RF | 1.5 | 7.0 | 3.25 | 5.00 | 3.62 | 0.75 | .434 | 0.873 | 7.25 | 5.25 | 21.5 | P-4128-CS | 125 |
| 2x2x2 | 2F-F13-RF | 2F-F13N-RF | 2F-F13NL-RF | 2 | 7.0 | 2.75 | 6.00 | 4.37 | 0.87 | .497 | 0.998 | 10.25 | 6.20 | 28.0 | P-4129-CS | · 1 |
| 3x2x3 | 3R-F13-RF | 3R-F13N-RF | 3R-F13NL-RF | 2 | 8.0 | 3.00 | 6.00 | 4.37 | 0.87 | .497 | 0.998 | 10.25 | 6.20 | 40.0 | P-4129-CS | 200 |
| 3x3x3 | 3F-F13-RF | 3F-F13N-RF | 3F-F13NL-RF | 3 | 8.0 | 3.56 | 7.50 | 5.75 | 1.06 | .747 | 1.373 | 20.0 | 7.75 | 54.0 | P-4127-DI | - 1 |
| 4x3x4 | 4R-F13-RF | 4R-F13N-RF | 4R-F13NL-RF | 3 | 9.0 | 4.06 | 7.87 | 5.75 | 1.06 | .747 | 1.373 | 20.0 | 7.75 | 70.0 | P-4127-DI | 525 |
| 4x4x4 | 4F-F13-RF | 4F-F13N-RF | 4F-F13NL-RF | 4 | 9.0 | 4.06 | 9.00 | 6.37 | 1.06 | .747 | 1.373 | 20.0 | 8.37 | 80.0 | P-4127-DI | - |
| 6x4x6 | 6R-F13-RF | 6R-F13N-RF | N/A | 4 | 10.5 | 4.81 | 9.37 | 6.37 | 1.06 | .747 | 1.373 | 20.0 | 8.37 | 102 | P-4127-DI | 800 |

^{*} Balon manufactured Actuation Mounting Hardware available. Please see page A-2 for details.




^{*} Seat selection may result in de-rating of pressure. See Seat Pressure Ratings chart on page B-37 for more information.

^{*}Also available with Balon Gear Operator

Series F Carbon Steel

- Gear Operated Ball Valve
- ANSI Class 150 (285 PSI WP)
- 6" Through 10"
- Bolted Body Construction
- Meets API 641 Emissions Standard
- Available in Low-Temp Service to -50° F
- Exclusive Balon Gearbox
 - ✓ Suitable for Buried Service
 - ✓ Integral Locking Device Standard
 - ✓ Manufactured in our Oklahoma City Plant
- Multi-Seal Seats
- Fire Safe Design
- NACE Option With 316 Stainless Steel Ball and Stem Available

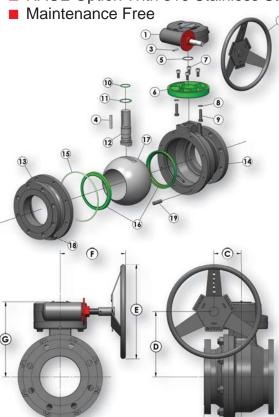




Material Description

| ITEM | PART NAME | MATERIAL (STANDARD) | MATERIAL (NACE) | LOW TEMP (NACE) |
|------|-----------------------|--------------------------------------|-----------------------|----------------------|
| 1 | Gear Operator | Ductile Iron | Ductile Iron | Ductile Iron |
| 2 | Hand Wheel | Carbon Steel | Carbon Steel | Carbon Steel |
| 3 | Drive Pin | Carbon Spring Steel | Carbon Spring Steel | Carbon Spring Steel |
| 4 | Stem Key | Steel Key Stock | Steel Key Stock | Steel Key Stock |
| 5 | Stem Retainer Ring | Carbon Spring Steel | Carbon Spring Steel | Carbon Spring Steel |
| 6 | Mounting Plate | Ductile Iron | Ductile Iron | Ductile Iron |
| 7 | Mounting Plate | Alloy Steel | Alloy Steel | Alloy Steel |
| | Screws | | | |
| 8 | Lock Washers | Carbon Steel | Carbon Steel | Carbon Steel |
| 9 | Mounting Screws | Alloy Steel | Alloy Steel | Alloy Steel |
| 10 | Stem O-Ring | Buna-N | Fluorocarbon | Fluorocarbon |
| 11 | Stem Seal | TFE | TFE | TFE |
| 12 | Stem | Carbon Steel | 316 Stainless Steel | 316 Stainless Steel |
| 13 | End Adapter* | ASTM A105, Normalized | ASTM A105, Normalized | ASTM A350 LF2 CL1 |
| 14 | Body* | ASTM A105, Normalized | ASTM A105, Normalized | ASTM A350 LF2 CL1 |
| 15 | Body O-Ring | Buna-N | Fluorocarbon | Fluorocarbon |
| 16 | Ball Seats | Nylon (TFE Optional) | Nylon (TFE Optional) | Nylon (TFE Optional) |
| 17 | Ball | Carbon Steel Nickel Chrome Plated | 316 Stainless Steel | 316 Stainless Steel |
| 18 | Nuts | ASTM A194 2H | ASTM A194 2HM | ASTM A320 7M |
| 19 | Body Bolts | ASTM A193 B7 | ASTM A193 B7M | ASTM A320 L7M |

^{*}Body/Adapter on 10R-F13 is ASTM A216 WCB or A352 LCC

| | С | ATALOG NUMBER | | | | | | | | | | | |
|---------|--|------------------------------------|-----------------------------------|------|------|------|------|------|----|------|-------|------|------|
| SIZE | STANDARD TRIM CARBON STEEL BALL & STEM | NACE TRIM 316 SS BALL & STEM | LOW TEMP 316 SS BALL & STEM | PORT | А | В | С | D | E | F | G | LBS. | Cv |
| 6x6x6 | 6F-F13-RF | 6F-F13N-RF | 6F-F13NL-RF | 6 | 10.5 | 4.50 | 4.00 | 9.75 | 14 | 9.0 | 11.19 | 230 | - |
| 6x6x6 | 6F-F13-RF15.5 | 6F-F13N-RF15.5 | 6F-F13NL-RF15.5 | 6 | 15.5 | 4.50 | 4.00 | 9.75 | 14 | 9.0 | 11.19 | 255 | - |
| 8x6x8 | 8R-F13-RF | 8R-F13N-RF | N/A | 6 | 11.5 | 5.12 | 4.00 | 9.75 | 14 | 9.0 | 11.19 | 285 | 2200 |
| 8x8x8 | 8F-F13-RF | 8F-F13N-RF | 8F-F13NL-RF | 8 | 18.0 | 8.00 | 5.25 | 12.0 | 20 | 11.5 | 13.75 | 520 | - |
| 10x8x10 | 10R-F13-RF | 10R-F13N-RF | N/A | 8 | 21.0 | 9.00 | 5.25 | 12.0 | 20 | 11.5 | 13.75 | 580 | 4200 |



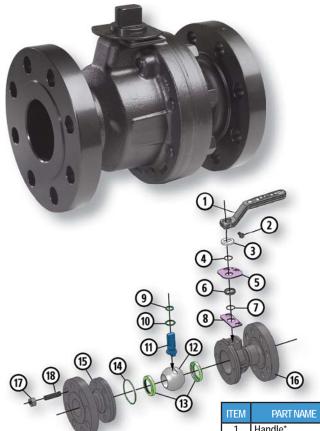

Series F Carbon Steel

- **■** Lever Operated Ball Valve
- ANSI Class 300 (740 PSI WP)
- 2" Through 6"
- Bolted Body Construction
- Meets API 641 Emissions Standard
- Available in Low-Temp Service to -50° F
- Multi-Seal Seats
- Fire Safe Design
- NACE Option With 316 Stainless Steel Ball and Stem Available
- Rugged Locking Device Standard
- Maintenance Free

Material Description

| Ш | EM | PART NAME | MATERIAL (STANDARD) | MATERIAL (NACE) | LOW TEMP (NACE) |
|---|----|---------------------|--------------------------------------|---------------------------|---------------------------|
| | 1 | Handle* | Carbon Steel/Ductile Iron | Carbon Steel/Ductile Iron | Carbon Steel/Ductile Iron |
| | 2 | Handle Bolt | Standard Hex Bolt | Standard Hex Bolt | Standard Hex Bolt |
| | 3 | Weather Guard | Polyethylene | Polyethylene | Polyethylene |
| - | 4 | Lock Plate Retainer | Carbon Spring Steel | Carbon Spring Steel | Carbon Spring Steel |
| ! | 5 | Lock Plate | Carbon Steel | Carbon Steel | Carbon Steel |
| | 6 | Dust Cover | Polyethylene | Polyethylene | Polyethylene |
| | 7 | Stop Plate Retainer | Carbon- Spring Steel | Carbon Spring Steel | Carbon Spring Steel |
| | 8 | Stop Plate | Carbon Steel | Carbon Steel | Carbon Steel |
| | 9 | Stem O-Ring | Buna-N | Fluorocarbon | Fluorocarbon |
| 1 | 0 | Stem Seal | TFE | TFE | TFE |
| 1 | 1 | Stem | Carbon Steel | 316 Stainless Steel | 316 Stainless Steel |
| 1 | 2 | Ball | Carbon Steel Nickel Chrome Plated | 316 Stainless Steel | 316 Stainless Steel |
| 1 | 3 | Ball Seat | Nylon (TFE Optional**) | Nylon (TFE Optional**) | Nylon (TFE Optional**) |
| 1 | 4 | Body O-Ring | Buna-N | Fluorocarbon | Fluorocarbon |
| 1 | 5 | End Adapter | ASTM A105, Normalized | ASTM A105, Normalized | ASTM A350 LF2 CL1 |
| 1 | 6 | Body | ASTM A105, Normalized | ASTM A105, Normalized | ASTM A350 LF2 CL1 |
| 1 | 7 | Nuts | ASTM A194 2H | ASTM A194 2HM | ASTM A320 7M |
| 1 | 8 | Body Bolts | ASTM A193 B7 | ASTM A193 B7M | ASTM A320 L7M |

^{*}Handle is optional. Balon valves can also be operated with a standard open-end wrench.

| | CA | TALOG NUMBER | ? | | | | | | | | | | | | | |
|---------|--|------------------------------------|-----------------------------------|------|-------|------|------|------|------|------|-------|-------|------|------|-----------|-----|
| SIZE | STANDARD TRIM CARBON STEEL BALL & STEM | NACE TRIM 316 SS BALL & STEM | LOW TEMP 316 SS BALL & STEM | PORT | Α | В | D | Ε | F | G | Н | M | N | LBS. | HANDLE | Cv |
| 2x1.5x2 | 2R-F33-RF | 2R-F33N-RF | 2R-F33NL-RF | 1.5 | 8.50 | 4.00 | 5.00 | 3.62 | 0.75 | .434 | 0.873 | 7.25 | 5.25 | 29 | P-4128-CS | 125 |
| 2x2x2 | 2F-F33-RF | 2F-F33N-RF | 2F-F33NL-RF | 2 | 8.50 | 3.75 | 6.50 | 4.37 | 0.87 | .497 | 0.998 | 10.25 | 6.20 | 36 | P-4129-CS | - |
| 3x2x3 | 3R-F33-RF | 3R-F33N-RF | 3R-F33NL-RF | 2 | 11.12 | 4.56 | 6.50 | 4.37 | 0.87 | .497 | 0.998 | 10.25 | 6.20 | 60 | P-4129-CS | 200 |
| 3x3x3 | 3F-F33-RF | 3F-F33N-RF | 3F-F33NL-RF | 3 | 11.12 | 5.12 | 8.00 | 5.75 | 1.06 | .747 | 1.373 | 20.00 | 7.75 | 76 | P-4127-DI | - |
| 4x3x4 | 4R-F33-RF | 4R-F33N-RF | 4R-F33NL-RF | 3 | 12.00 | 5.56 | 8.00 | 5.75 | 1.06 | .747 | 1.373 | 20.00 | 7.75 | 98 | P-4127-DI | 525 |
| 4x4x4 | 4F-F33-RF | 4F-F33N-RF | 4F-F33NL-RF | 4 | 12.00 | 5.50 | 9.37 | 6.37 | 1.06 | .747 | 1.373 | 20.00 | 8.37 | 128 | P-4127-DI | - |
| 6x4x6 | 6R-F33-RF | 6R-F33N-RF | N/A | 4 | 15.87 | 7.44 | 10.0 | 6.37 | 1.06 | .747 | 1.373 | 20.00 | 8.37 | 196 | P-4127-DI | 800 |

^{*} Balon manufactured Actuation Mounting Hardware available. Please see page A-2 for details.



^{**}Seat selection may result in de-rating of pressure. See Seat Pressure Ratings chart on page B-37 for more information.


^{*} Also available with Balon Gear Operator.

Series F Carbon Steel

- Gear Operated Ball Valve
- ANSI Class 300 (740 PSI WP)
- 6" Through 8"
- **Bolted Body Construction**
- Meets API 641 **Emissions Standard**
- Available in Low-Temp Service to -50° F
 Exclusive Balon Gearbox
- - Suitable for Buried Service
 - ✓ Integral Locking Device Standard
 - Manufactured in our Oklahoma City Plant
- Multi-Seal Seats
- Fire Safe Design
- NACE Option With 316 Stainless Steel Ball and Stem Available
- Maintenance Free



| | 3 5 | 1111 | |
|--|-----|------|--|
| (B) (B) (C) (C) (C) (C) (C) (C) (C) (C) (C) (C | 0 | i i | |
| 18 | 16 | 19 | |

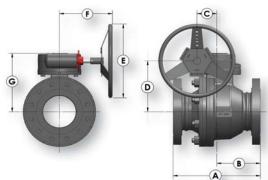

Material Description

| ITEM | PART NAME | MATERIAL (STANDARD) | MATERIAL (NACE) | LOW TEMP (NACE) |
|------|--------------------------|-----------------------|-----------------------|-----------------------|
| 1 | Gear Operator | Ductile Iron | Ductile Iron | Ductile Iron |
| 2 | Hand Wheel | Carbon Steel | Carbon Steel | Carbon Steel |
| 3 | Drive Pin | Carbon Spring Steel | Carbon Spring Steel | Carbon Spring Steel |
| 4 | Stem Key | Steel Key Stock | Steel Key Stock | Steel Key Stock |
| 5 | Stem Retainer Ring | Carbon Spring Steel | Carbon Spring Steel | Carbon Spring Steel |
| 6 | Mounting Plate | Ductile Iron | Ductile Iron | Ductile Iron |
| 7 | Mounting Plate Screws | Alloy Steel | Alloy Steel | Alloy Steel |
| 8 | Lock Washers | Carbon Steel | Carbon Steel | Carbon Steel |
| 9 | Mounting | Alloy Steel | Alloy Steel | Alloy Steel |
| | Screws | | | |
| 10 | Stem O-Ring | Buna-N | Fluorocarbon | Fluorocarbon |
| 11 | Stem Seal | TFE | TFE | TFE |
| 12 | Stem | Carbon Steel | 316 Stainless Steel | 316 Stainless Steel |
| 13 | End Adapter | ASTM A105, Normalized | ASTM A105, Normalized | ASTM A350 LF2 CL1 |
| 14 | Body | ASTM A105, Normalized | ASTM A105, Normalized | ASTM A350 LF2 CL1 |
| 15 | Body O-Ring | Buna-N | Fluorocarbon | Fluorocarbon |
| 16 | Ball Seats | Nylon (TFE Optional*) | Nylon (TFE Optional*) | Nylon (TFE Optional*) |
| 17 | Ball | Carbon Steel | 316 Stainless Steel | 316 Stainless Steel |
| | | Nickel Chrome Plated | | |
| 18 | Nuts | ASTM A194 2H | ASTM A194 2HM | ASTM A320 7M |
| 19 | Body Bolts | ASTM A193 B7 | ASTM A193 B7M | ASTM A320 L7M |

*Seat selection may result in de-rating of pressure. See Seat Pressure Ratings chart on page B-37 for more information.

| ĺ | | C | ATALOG NUMBER | | | | | | | | | | | |
|---|-------|--|------------------------------------|-----------------------------------|------|-------|------|---|------|----|---|-------|------|------|
| | SIZE | STANDARD TRIM CARBON STEEL BALL & STEM | NACE TRIM 316 SS BALL & STEM | LOW TEMP 316 SS BALL & STEM | PORT | А | В | С | D | E | F | G | LBS. | Cv |
| ĺ | 6x6x6 | 6F-F33-RF | 6F-F33N-RF | 6F-F33NL-RF | 6 | 15.87 | 7.38 | 4 | 9.75 | 14 | 9 | 11.19 | 307 | - |
| ı | 8x6x8 | 8R-F33-RF | 8R-F33N-RF | N/A | 6 | 16 50 | 7 69 | 4 | 9 75 | 14 | 9 | 11 19 | 409 | 2200 |






Series F Carbon Steel

- **■** Lever Operated Ball Valve
- ANSI Class 600 (1480 PSI WP)
- 1" Through 4"
- **■** Bolted Body Construction




- Available in Low-Temp Service to -50° F
- Multi-Seal Seats
- Fire Safe Design
- NACE Option With 316 Stainless Steel Ball and Stem Available
- Rugged Locking Device Standard
- Maintenance Free

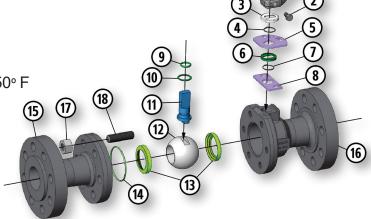

Material Description

| ITEM | PART NAME | MATERIAL (STANDARD) | MATERIAL (NACE) | LOW TEMP (NACE) |
|------|---------------------|---------------------------|---------------------------|---------------------------|
| 1 | Handle* | Carbon Steel/Ductile Iron | Carbon Steel/Ductile Iron | Carbon Steel/Ductile Iron |
| 2 | Handle Bolt | Standard Hex Bolt | Standard Hex Bolt | Standard Hex Bolt |
| 3 | Weather Guard | Polyethylene | Polyethylene | Polyethylene |
| 4 | Lock Plate Retainer | Carbon Spring Steel | Carbon Spring Steel | Carbon Spring Steel |
| 5 | Lock Plate | Carbon Steel | Carbon Steel | Carbon Steel |
| 6 | Dust Cover | Polyethylene | Polyethylene | Polyethylene |
| 7 | Stop Plate Retainer | Carbon Spring Steel | Carbon Spring Steel | Carbon Spring Steel |
| 8 | Stop Plate | Carbon Steel | Carbon Steel | Carbon Steel |
| 9 | Stem O-Ring | Buna-N | Fluorocarbon | Fluorocarbon |
| 10 | Stem Seal | TFE | TFE | TFE |
| 11 | Stem | Carbon Steel | 316 Stainless Steel | 316 Stainless Steel |
| 12 | Ball | Carbon Steel | 316 Stainless Steel | 316 Stainless Steel |
| | | Nickel Chrome Plated | | |
| 13 | Ball Seat | Nylon 11 (TFE Optional**) | Nylon 11 (TFE Optional**) | Nylon 11 (TFE Optional**) |
| 14 | Body O-Ring | Buna-N | Fluorocarbon | Fluorocarbon |
| 15 | End Adapter | ASTM A105, Normalized | ASTM A105, Normalized | ASTM A350 LF2 CL1 |
| 16 | Body | ASTM A105, Normalized | ASTM A105, Normalized | ASTM A350 LF2 CL1 |
| 17 | Nuts | ASTM A194 2H | ASTM A194 2HM | ASTM A320 7M |
| 18 | Body Bolts | ASTM A193 B7 | ASTM A193 B7M | ASTM A320 L7M |



| | | ALOG NUMBE | | | | 4 | | 3 | | | | | | | | | | |
|---------|--|------------------------------------|-----------------------------------|------|------|-------|------|------|------|------|------|------|-------|-------|------|-------|-----------|--------|
| SIZE | STANDARD TRIM CARBON STEEL BALL & STEM | NACE TRIM 316 SS BALL & STEM | LOW TEMP 316 SS BALL & STEM | PORT | RF | RTJ | RF | RTJ | D | Ε | F | G | Н | M | N | LBS. | HANDLE | Cv |
| 1x1x1 | 1F-F63 | 1F-F63N | 1F-F63NL | 1 | 8.50 | - | 3.68 | - | 3.37 | 2.37 | .50 | .340 | .685 | 4.37 | 2 | 13.35 | P-333-CS | \Box |
| 2x1.5x2 | 2R-F63 | 2R-F63N | 2R-F63NL | 1.5 | 11.5 | 11.62 | 5.06 | 5.12 | 5.37 | 3.62 | .75 | .434 | .873 | 7.25 | 5.25 | 37 | P-4128-CS | 125 |
| 2x2x2 | 2F-F63 | 2F-F63N | 2F-F63NL | 2 | 11.5 | 11.62 | 4.75 | 4.81 | 6.50 | 4.37 | .87 | .497 | .998 | 10.25 | 6.20 | 48 | P-4129-CS | |
| 3x2x3 | 3R-F63 | 3R-F63N | 3R-F63NL | 2 | 14 | 14.12 | 5.75 | 5.81 | 6.62 | 4.37 | .87 | .497 | .998 | 10.25 | 6.75 | 69 | P-4129-CS | 200 |
| 3x3x3 | 3F-F63 | 3F-F63N | 3F-F63NL | 3 | 14 | 14.12 | 5.50 | 5.56 | 8 | 5.75 | 1.06 | .747 | 1.373 | 20 | 7.75 | 90 | P-4127-DI | |
| 4x3x4 | 4R-F63 | 4R-F63N | 4R-F63NL | 3 | 17 | 17.12 | 6.87 | 6.93 | 8.62 | 5.75 | 1.06 | .747 | 1.373 | 20 | 7.75 | 154 | P-4127-DI | 525 |

^{*} Balon manufactured Actuation Mounting Hardware available. Please see page A-2 for details.



^{*} Handle is optional. Balon valves can also be operated with a standard open-end wrench.

^{**} Seat selection may result in de-rating of pressure. See Seat Pressure Ratings chart on page B-37 for more information.

^{*} Also available with Balon Gear Operator.

Series F Carbon Steel


- Gear Operated Ball Valve
- ANSI Class 600 (1480 PSI WP)
- 4" Through 8"
- Bolted Body Construction
- Meets API 641 Emissions Standard
- Available in Low-Temp Service to -50° F
- Exclusive Balon Gearbox
 - Suitable for Buried Service
 - Stainless Steel Input Shaft Standard
 - ✓ Stainless Steel Directional Indicator
 - ✓ Integral Locking Device Standard
 - ✓ Manufactured in our Oklahoma City Plant
- Multi-Seal Seats
- Fire Safe Design
- NACE Option With 316 Stainless Steel Ball and Stem Available
- Maintenance Free

Material Description

| ITEM | PART NAME | MATERIAL (STANDARD) | MATERIAL (NACE) | LOW TEMP (NACE) |
|------|--------------------------|-----------------------|-----------------------|-----------------------|
| 1 | Gear Operator | Ductile Iron | Ductile Iron | Ductile Iron |
| 2 | Hand Wheel | Carbon Steel | Carbon Steel | Carbon Steel |
| 3 | Drive Pin | Carbon Spring Steel | Carbon Spring Steel | Carbon Spring Steel |
| 4 | Stem Key | Steel Key Stock | Steel Key Stock | Steel Key Stock |
| 5 | Stem Retainer Ring | Carbon Spring Steel | Carbon Spring Steel | Carbon Spring Steel |
| 6 | Mounting Plate | Ductile Iron | Ductile Iron | Ductile Iron |
| 7 | Mounting Plate Screws | Alloy Steel | Alloy Steel | Alloy Steel |
| 8 | Lock Washers | Carbon Steel | Carbon Steel | Carbon Steel |
| 9 | Mounting | Alloy Steel | Alloy Steel | Alloy Steel |
| | Screws | | | |
| 10 | Stem O-Ring | Buna-N | Fluorocarbon | Fluorocarbon |
| 11 | Stem Seal | TFE | TFE | TFE |
| 12 | Stem | Carbon Steel | 316 Stainless Steel | 316 Stainless Steel |
| 13 | End Adapter | ASTM A105, Normalized | ASTM A105, Normalized | ASTM A350 LF2 CL1 |
| 14 | Body | ASTM A105, Normalized | ASTM A105, Normalized | ASTM A350 LF2 CL1 |
| 15 | Body O-Ring | Buna-N | Fluorocarbon | Fluorocarbon |
| 16 | Ball Seats | Nylon (TFE Optional*) | Nylon (TFE Optional*) | Nylon (TFE Optional*) |
| 17 | Ball | Carbon Steel | 316 Stainless Steel | 316 Stainless Steel |
| | | Nickel Chrome Plated | | |
| 18 | Nuts | ASTM A194 2H | ASTM A194 2HM | ASTM A320 7M |
| 19 | Body Bolts | ASTM A193 B7 | ASTM A193 B7M | ASTM A320 L7M |

^{*}Seat selection may result in de-rating of pressure. See Seat Pressure Ratings chart on page B-37 for more information.



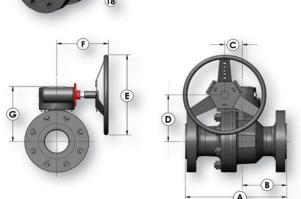

| CIZE | CA STANDARD TRIM | TALOG NUMBER NACE TRIM | LOWTEMP | DODT | | A | | В | | , | | _ | | I DC | 0 |
|-------|-----------------------------|------------------------|-----------------------|------|----|-------|-------|-------|---|------|----|----|-------|------|------|
| SIZE | CARBON STEEL BALL & STEM | 316 SS BALL & STEM | 316 SS BALL & STEM | PORT | RF | RTJ | RF | RTJ | L | D | Ł | | G | LBS. | Cv |
| 4x4x4 | 4F-F63 | 4F-F63N | 4F-F63NL-RF | 4 | 17 | 17.12 | 7.37 | 7.43 | 3 | 8.19 | 14 | 9 | 9.69 | 238 | - |
| 6x4x6 | 6R-F63 | 6R-F63N | 6R-F63NL-RF | 4 | 22 | 22.12 | 9.88 | 9.25 | 3 | 8.19 | 14 | 9 | 9.69 | 340 | 800 |
| 6x6x6 | 6F-F63 | 6F-F63N | 6F-F63NL-RF | 6 | 22 | 22.12 | 8.62 | 8.68 | 4 | 9.75 | 20 | 11 | 11.19 | 440 | - |
| 8x6x8 | 8R-F63 | 8R-F63N | 8R-F63NL-RF | 6 | 26 | 26.12 | 10.62 | 10.68 | 4 | 9.75 | 20 | 11 | 11.19 | 570 | 2200 |






- Meets API 641 Emissions Standard
- Multi-Seal Seats
- Fire Safe Design
- NACE Option With 316 Stainless Steel Ball and Stem Available
- Rugged Locking Device Standard
- Maintenance Free

Series F Carbon Steel

- Lever Operated Ball Valve
- ANSI Class 900 (2220 PSI WP)
- ANSI Class 1500 (3705 PSI WP)
- 2"
- **■** Bolted Body Construction

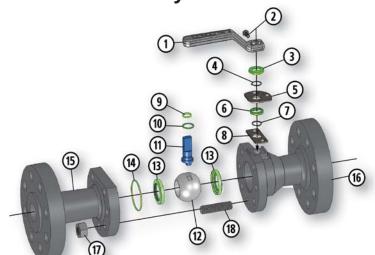

Material Description

| ITEM | PART NAME | MATERIAL (STANDARD) | MATERIAL (NACE) |
|------|------------------------|--------------------------------------|-----------------------|
| 1 | Handle* | Carbon Steel | Carbon Steel |
| 2 | Handle Bolt | Standard Hex Bolt | Standard Hex Bolt |
| 3 | Weather Guard | Polyethylene | Polyethylene |
| 4 | Lock Plate Retainer | Carbon Spring Steel | Carbon Spring Steel |
| 5 | Lock Plate | Carbon Steel | Carbon Steel |
| 6 | Dust Cover | Polyethylene | Polyethylene |
| 7 | Stop Plate Retainer | Carbon Spring Steel | Carbon Spring Steel |
| 8 | Stop Plate | Carbon Steel | Carbon Steel |
| 9 | Stem O-Ring | Buna-N | Fluorocarbon |
| 10 | Stem Seal | TFE | TFE |
| 11 | Stem | Carbon Steel | 316 Stainless Steel |
| 12 | Ball | Carbon Steel Nickel Chrome Plated | 316 Stainless Steel |
| 13 | Ball Seat | Nylon/Acetal | Nylon/Acetal |
| 14 | Body O-Ring | Buna-N | Fluorocarbon |
| 15 | End Adapter | ASTM A105, Normalized | ASTM A105, Normalized |
| 16 | Body | ASTM A105, Normalized | ASTM A105, Normalized |
| 17 | Nuts | ASTM A194 2H | ASTM A194 2HM |
| 18 | Body Bolts | ASTM A193 B7 | ASTM A193 B7M |

| SIZE | CATALOG I STANDARD TRIM | TALOG NUMBER D TRIM NACE TRIM | | , | 4 | В | | | | | | | M | N | LBS. | HANDLE | Cv |
|---------|-----------------------------|-------------------------------|------|-------|-------|------|------|------|------|-----|------|------|-------|------|------|-----------|-----|
| | CARBON STEEL BALL & STEM | 316 SS BALL & STEM | PORT | RF | RTJ | RF | RTJ | ט | | | G | | IVI | IN | LBS. | HANDLE | CV |
| 2x1.5x2 | 2R-F93 | 2R-F93N | 1.5 | 14.50 | 14.62 | 6.31 | 6.37 | 6.25 | 3.62 | .75 | .434 | .873 | 7.25 | 5.25 | 75 | P-4128-CS | 125 |
| 2x2x2 | 2F-F93 | 2F-F93N | 2 | 14.50 | 14.62 | 6.00 | 6.06 | 7.00 | 4.37 | .87 | .497 | .998 | 10.25 | 6.20 | 81 | P-4129-CS | - |
| 2x1.5x2 | 2R-F03 | 2R-F03N | 1.5 | 14.5 | 14.62 | 6.31 | 6.37 | 6.25 | 3.62 | .75 | .434 | .873 | 7.25 | 5.25 | 75 | P-4128-CS | 125 |

^{*} Balon manufactured Actuation Mounting Hardware available. Please see page A-2 for details.



^{*}Handle is optional. Balon valves can also be operated with a standard open-end wrench.


^{*}Also available with Balon Gear Operator.


Series F Carbon Steel

- Gear Operated Ball Valve
- ANSI Class 900 (2220 PSI WP)
- 3"
- Bolted Body Construction
- Meets API 641 **Emissions Standard**
- Multi-Seal Seats
- Fire Safe Design
- NACE Option With 316 Stainless Steel Ball and Stem Available
- Rugged Locking Device Standard
- Maintenance Free



| ITEM | PART NAME | MATERIAL (STANDARD) | MATERIAL (NACE) |
|------|--------------------|---|-----------------------|
| 1 | Gear Operator | Ductile Iron | Ductile Iron |
| 2 | Hand Wheel | Carbon Steel | Carbon Steel |
| 3 | Drive Pin | Carbon Steel | Carbon Steel |
| 4 | Stem Key | Steel Key Stock | Steel Key Stock |
| 5 | Stem Drive Adapter | Carbon Steel | Carbon Steel |
| 6 | Weather Guard | Polyethylene | Polyethylene |
| 7 | Snap-Ring | Carbon Spring Steel | Carbon Spring Steel |
| 8 | Lock Washers | Carbon Steel | Carbon Steel |
| 9 | Mounting Screws | Alloy Steel | Alloy Steel |
| 10 | Stem O-Ring | Buna-N | Fluorocarbon |
| 11 | Stem Seal | TFE | TFE |
| 12 | Stem | Carbon Steel | 316 Stainless Steel |
| 13 | Ball | Carbon Steel Nickel Chrome Plated | 316 Stainless Steel |
| 14 | Ball Seats | Acetal | Acetal |
| 15 | Body O-Ring | Buna-N | Fluorocarbon |
| 16 | End Adapter | ASTM A105, Normalized | ASTM A105, Normalized |
| 17 | Body | ASTM A105, Normalized | ASTM A105, Normalized |
| 18 | Nuts | ASTM A194 2H | ASTM A194 2HM |
| 19 | Body Bolts | ASTM A193 B7 | ASTM A193 B7M |

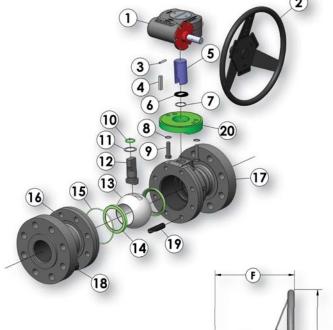

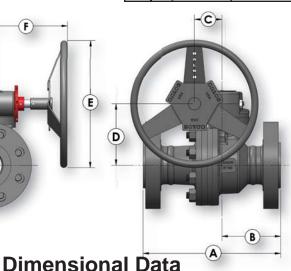


| | CATALOG I | NUMBER | А | | А | | Α | | А | | Α | | Α | | Α | | Α | | Α | | Α | | Α | | А | | А | | А | | А | | А | | Α | | Α | | 3 | | | | | | | |
|-------|-----------------------------|-----------------------|------|----|-------|------|------|---|------|----|---|------|------|----|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|--|--|--|--|--|--|
| SIZE | STANDARD TRIM | NACE TRIM | PORT | | _ | | | С | D | F | F | G | LBS. | Cv | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | CARBON STEEL BALL & STEM | 316 SS BALL & STEM | | RF | RTJ | RF | RTJ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3x3x3 | 3F-F93 | 3F-F93N | 3 | 15 | 15.12 | 6.38 | 6.44 | 3 | 6.75 | 14 | 9 | 8.12 | 183 | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Weld X Flange Connection

Series US Weld X Flange Carbon Steel




- Weld X Flange Ball Valve
- ANSI Class 150 (285 PSI WP)
- ANSI Class 300 (740 PSI WP)
- 2" Through 6"
- Meets API 641Emissions Standard
- Multi-Seal Seats
- True Full Port for Hot Tap Service
- Heat Dissipating Fins for Protection of Seats and Seals During Welding
- Rugged Double Stops
- Heavy Duty Forged Steel Construction
- Stainless Steel Stem Standard
- Maintenance Free
- Meets/Exceeds-ASME B16.34
- 100% Made in USA
- Each Valve Marked With A Unique Identification Number

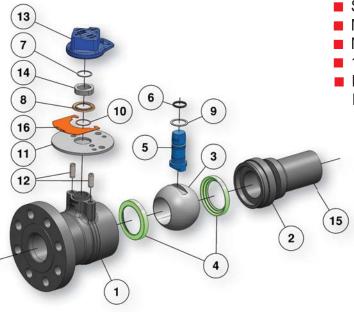

* Note: Valve is seal welded and is not field repairable

Material Description

| ITEM | PART NAME | MATERIAL (STANDARD) |
|------|-----------------------|-------------------------------------|
| 1 | Body | ASTM A105, Normalized |
| 2 | Adapter | ASTM A105, Normalized |
| 3 | Ball | Carbon Steel - Nickel Chrome Plated |
| 4 | Seats | Nylon |
| 5 | Stem | 316 Stainless Steel |
| 6 | Stem O-Ring | Buna-N |
| 7 | Snap Ring | Carbon Steel |
| 8 | Weather Seal | Nylon |
| 9 | Stem Seal | TFE |
| 10 | Snap Ring | Carbon Steel |
| 11 | Lock Plate | Carbon Steel |
| 12 | Stop Pin | Stainless Steel |
| 13 | Drive Nut - 2" Square | Ductile Iron/Carbon Steel |
| 14 | Stem Connector | Carbon Steel |
| 15 | Pipe | ASTM A106 Grade C |
| 16 | Tag | Stainless Steel |

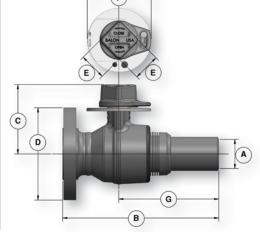

| SIZE | CATALOG | PORT/A | WP | В | С | D | Е | F | G | LBS. | Cv |
|---------|-------------|--------|-----|-------|------|------|---|------|-----|------|-----|
| 2x1.5x2 | 2R-US13-WF | 1.5 | 285 | 10.5 | 4.5 | 6.0 | 2 | 4.5 | 6.9 | 18.5 | 148 |
| 2x1.5x2 | 2R-US33-WF | 1.5 | 740 | 10.6 | 4.5 | 6.5 | 2 | 4.5 | 6.9 | 20.1 | 148 |
| 2x2x2 | 2F-US13-WF | 2 | 285 | 10.9 | 4.9 | 6.0 | 2 | 4.5 | 7.0 | 22.5 | - |
| 2x2x2 | 2F-US33-WF | 2 | 740 | 11.0 | 4.9 | 6.5 | 2 | 4.5 | 7.0 | 24.0 | - |
| 3x3x3 | 3F-US13-WF | 3 | 285 | 11.7 | 5.9 | 7.5 | 2 | 4.5 | 7.0 | 47.0 | - |
| 3x3x3 | 3F-US33-WF | 3 | 740 | 11.9 | 5.9 | 8.25 | 2 | 4.5 | 7.0 | 51.2 | - |
| 4x3x4 | 4R-US13-WF | 3 | 285 | 12.2 | 5.9 | 9.0 | 2 | 4.5 | 7.4 | 54.2 | 662 |
| 4x3x4 | 4R-US33-WF | 3 | 740 | 12.5 | 5.9 | 10.0 | 2 | 4.5 | 7.4 | 63.5 | 662 |
| 4x4x4 | 4F-US13-WF | 4 | 285 | 12.8 | 6.6 | 9.0 | 2 | 4.5 | 7.6 | 71.5 | - |
| 4x4x4 | 4F-US33-WF | 4 | 740 | 13.1 | 6.6 | 10.0 | 2 | 4.5 | 7.6 | 80.7 | - |
| 6x6x6 | 6F-US13-WF* | 6 | 285 | 16.74 | 12.4 | 11.0 | 2 | 5.25 | 9.0 | 138 | - |
| 6x6x6 | 6F-US33-WF* | 6 | 740 | 16.93 | 12.4 | 12.5 | 2 | 5.25 | 9.0 | 175 | - |

^{*}Also available with Gear Operator.



Weld X Weld Connection

Series US Weld X Weld Carbon Steel

- Weld End Ball Valve
- ANSI Class 150 (285 PSI WP)
- ANSI Class 300 (740 PSI WP)
- 3/4" Through 8"
- Meets API 641 **Emissions Standard**
- Multi-Seal Seats
- True Full Port for Hot Tap Service
- Heat Dissipating Fins for Protection of Seats and Seals During Welding
- Each Valve Marked With A Unique Identification Number



| ITEM | PART NAME | MATERIAL (STANDARD) |
|------|-----------------------|-------------------------------------|
| 1 | Body | ASTM A105, Normalized |
| 2 | Adapter | ASTM A105, Normalized |
| 3 | Ball | Carbon Steel - Nickel Chrome Plated |
| 4 | Seats | Nylon |
| 5 | Stem | 316 Stainless Steel |
| 6 | Stem O-Ring | Buna-N |
| 7 | Snap Ring | Carbon Steel |
| 8 | Weather Seal | Nylon |
| 9 | Stem Seal | TFE |
| 10 | Snap Ring | Carbon Steel |
| 11 | Lock Plate | Carbon Steel |
| 12 | Stop Pin | Stainless Steel |
| 13 | Drive Nut - 2" Square | Ductile Iron/Carbon Steel |
| 14 | Stem Connector | Carbon Steel |
| 15 | Pipe | ASTM A106 Grade C |
| 16 | Tag | Stainless Steel |


Rugged Double Stops

■ Heavy Duty Forged Steel Construction

Stainless Steel Stem Standard Maintenance Free

■ Meets/Exceeds-ASME B16.34



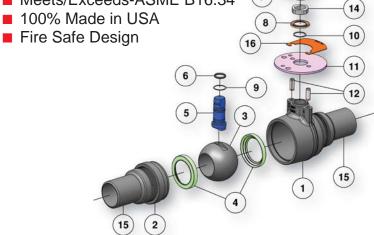


Dimensional Data * Note: Valve is seal welded and is not field repairable.

| SIZE | CATALOG | PORT/A | WP | В | С | D | E | F | LBS. | Cv |
|-------------|--------------|--------|-----|------|------|-------|-----|------|-------|------|
| .75x.75x.75 | 3/4F-US13-BW | .75 | 285 | 9.0. | 3.1 | 1.82 | .47 | 4.50 | 3.1 | - |
| .75x.75x.75 | 3/4F-US33-BW | .75 | 740 | 9.0 | 3.1 | 1.82 | .47 | 4.50 | 3.1 | - |
| 1x.75x1 | 1R-US13-BW | .75 | 285 | 9.0 | 3.1 | 1.82 | .47 | 4.50 | 3.65 | 30 |
| 1x.75x1 | 1R-US33-BW | .75 | 740 | 9.0 | 3.1 | 1.82 | .47 | 4.50 | 3.65 | 30 |
| 2x1.5x2 | 2R-US13-BW | 1.5 | 285 | 11.8 | 4.5 | 3.48 | 2.0 | 4.50 | 14.0 | 148 |
| 2x1.5x2 | 2R-US33-BW | 1.5 | 740 | 11.8 | 4.5 | 3.48 | 2.0 | 4.50 | 14.0 | 148 |
| 2x2x2 | 2F-US13-BW | 2 | 285 | 11.8 | 4.9 | 4.28 | 2.0 | 4.50 | 18.0 | - |
| 2x2x2 | 2F-US33-BW | 2 | 740 | 11.8 | 4.9 | 4.28 | 2.0 | 4.50 | 18.0 | - |
| 3x3x3 | 3F-US13-BW | 3 | 285 | 11.8 | 5.9 | 6.05 | 2.0 | 4.50 | 38.0 | - |
| 3x3x3 | 3F-US33-BW | 3 | 740 | 11.8 | 5.9 | 6.05 | 2.0 | 4.50 | 38.0 | - |
| 4x3x4 | 4R-US13-BW | 3 | 285 | 12.8 | 5.9 | 6.05 | 2.0 | 4.50 | 41.0 | 662 |
| 4x3x4 | 4R-US33-BW | 3 | 740 | 12.8 | 5.9 | 6.05 | 2.0 | 4.50 | 41.0 | 662 |
| 4x4x4 | 4F-US13-BW | 4 | 285 | 12.8 | 6.6 | 7.50 | 2.0 | 4.50 | 58.0 | - |
| 4x4x4 | 4F-US33-BW | 4 | 740 | 12.8 | 6.6 | 7.50 | 2.0 | 4.50 | 58.0 | - |
| 6x4x6 | 6R-US13-BW | 4 | 285 | 15.5 | 6.6 | 7.50 | 2.0 | 4.50 | 63.0 | 800 |
| 6x4x6 | 6R-US33-BW | 4 | 740 | 15.5 | 6.6 | 7.50 | 2.0 | 4.50 | 63.0 | 800 |
| 6x6x6 | 6F-US13-BW* | 6 | 285 | 18.0 | 12.4 | 10.47 | 2.0 | 5.25 | 174.0 | - |
| 6x6x6 | 6F-US33-BW* | 6 | 740 | 18.0 | 12.4 | 10.47 | 2.0 | 5.25 | 174.0 | - |
| 8x6x8 | 8R-US13-BW* | 6 | 285 | 20.5 | 12.4 | 10.47 | 2.0 | 5.25 | 184.0 | 2200 |
| 8x6x8 | 8R-US33-BW* | 6 | 740 | 20.5 | 12.4 | 10.47 | 2.0 | 5.25 | 184.0 | 2200 |

^{*}Also available with Gear Operator.



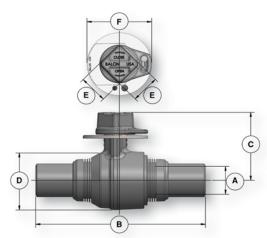

13

Threaded End Connection Socket Weld Series F Carbon Steel

- **Maintenance Free**
- **Bolted Body Construction**
- **3000 PSI WP**
- 1/2", 3/4" and 1"
- Forged Body and Adapter
- **Meets API 641 Emissions Standard**
- NACE Standard
- **Low-Torque Operation**
- Fire Safe Design
- Available in Low-Temperature Service to -50 °F
- **Multi-Seal Seats**
- **Lever Operated Ball Valve**




Material Description

| 2 |
|---|
| 0 |
| |
| |
| |

| | | _ | |
|------|---------------------|---------------------------|---------------------------|
| ITEM | PART NAME | MATERIAL (NACE) | LOW TEMP (NACE) |
| 1 | Weather Guard | Polyethylene | Polyethylene |
| 2 | Stem Nut | Carbon Steel | Carbon Steel |
| 3 | Spacer | Carbon Steel | Carbon Steel |
| 4 | Lock Plate | Carbon Steel | Carbon Steel |
| 5 | Handle | Carbon Steel | Carbon Steel |
| 6 | Stem Washer | Acetal | Acetal |
| 7 | Stop Pin | Carbon Steel | Carbon Steel |
| 8 | Stem O-Ring | Fluorocarbon | Fluorocarbon |
| 9 | Stem Seal | TFE | TFE |
| 10 | Stem | 316 Stainless Steel | 316 Stainless Steel |
| 11 | Body | ASTM A105, Normalized | ASTM A350 LF2 CL1 |
| 12 | Seat | Nylon 11 (TFE Optional**) | Nylon 11 (TFE Optional**) |
| 13 | Ball | 316 Stainless Steel | 316 Stainless Steel |
| 14 | Body Seal | Fluorocarbon | Fluorocarbon |
| 15 | End Adapter | ASTM A105 | ASTM A350 LF2 CL1 |
| 16 | Body Bolts | ASTM A193 B7M | ASTM A320 L7M |
| k | and look dovice are | . (() | |

* Handle and lock device are standard.

** Seat selection may result in de-rating of pressure. See Seat Pressure Ratings chart on page B-37 for more information.

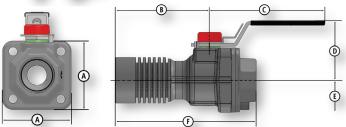


| | CATALOC | CATALOG NUMBER | | | | | | | | | | |
|-------------|------------------------------------|-----------------------------------|------|------|------|------|------|------|------|------|------|----|
| SIZE | NACE TRIM 316 SS BALL & STEM | LOW TEMP 316 SS BALL & STEM | PORT | WP | Α | В | С | D | Е | F | LBS. | Cv |
| .50x.50x.50 | 1/2F-F03N-SWSE | • | .50 | 3000 | 1.92 | 3.38 | 3.50 | 1.96 | .96 | 5.00 | 2.00 | - |
| .75x.75x.75 | 3/4F-F03N-SWSE | 3/4F-F03NL-SWSE | .75 | 3000 | 2.62 | 4.16 | 4.87 | 2.56 | 1.31 | 5.97 | 4.47 | - |
| 1x.75x1 | 1R-F03N-SWSE | 1R-F03NL-SWSE | .75 | 3000 | 2.62 | 4.16 | 4.87 | 2.56 | 1.31 | 5.97 | 4.47 | 30 |



Series S Ductile Iron

- Lever Operated Ball Valve
- To 2000 PSI WP
- 1" Through 4"
- Threaded Body Construction
- Meets API 641 Emissions Standard
- High Grade Annealed Ductile Iron for Better Corrosion Resistance and Greater Yield Strength
- Multi-Seal Seats
- NACE Option With 316 Stainless Steel Ball and Stem Available



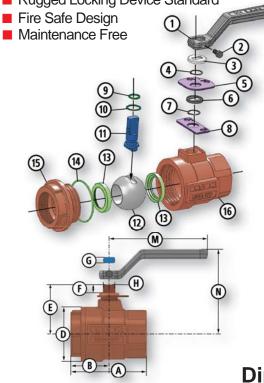




| | | | | • | | | | | | |
|---|------|---------------|--|--|--|--|--|--|--|--|
| į | ITEM | PART NAME | MATERIAL (STANDARD) | MATERIAL (NACE) | | | | | | |
| ı | 1 | Handle* | Carbon Steel/Ductile Iron | Carbon Steel/Ductile Iron | | | | | | |
| ı | 2 | Handle Bolt | Standard Hex Bolt | Standard Hex Bolt | | | | | | |
| ı | 3 | Weather Guard | Polyethylene | Polyethylene | | | | | | |
| ı | 4 | Lock Plate | Carbon Spring Steel | Carbon Spring Steel | | | | | | |
| | | Retainer | | | | | | | | |
| - | 5 | Lock Plate | Carbon Steel | Carbon Steel | | | | | | |
| | 6 | Dust Cover | Polyethylene | Polyethylene | | | | | | |
| ı | 7 | Stop Plate | Carbon Spring Steel | Carbon Spring Steel | | | | | | |
| ı | | Retainer | | | | | | | | |
| | 8 | Stop Plate | Carbon Steel | Carbon Steel | | | | | | |
| | 9 | Stem O-Ring | Buna-N | Fluorocarbon | | | | | | |
| | 10 | Stem Seal | TFE | TFE | | | | | | |
| 1 | 11 | Stem | Carbon Steel | 316 Stainless Steel | | | | | | |
| | 12 | Ball | Carbon Steel Nickel Chrome Plated | 316 Stainless Steel | | | | | | |
| | 13 | Ball Seat | Nylon (TFE Optional**) | Nylon (TFE Optional**) | | | | | | |
| ı | 14 | Body O-Ring | Buna-N | Fluorocarbon | | | | | | |
| | 15 | End Adapter | ASTM A395 Class 60-40-18 Fully Annealed | ASTM A395 Class 60-40-18 Fully Annealed | | | | | | |
| | 16 | Body | ASTM A395 Class 60-40-18 Fully Annealed | ASTM A395 Class 60-40-18 Fully Annealed | | | | | | |
| | | | | | | | | | | |

* Handle is optional. Balon valves can also be operated with a standard open-end wrench.


** Seat selection may result in de-rating of pressure. See Seat Pressure Ratings chart on page B-37 for more information.


| | CATALOG NUMBER | | | | | | | | | | | | | | | |
|---------|--|------------------------------------|------|------|------|------|------|------|------|------|-------|-------|------|------|-----------|-----|
| SIZE | STANDARD TRIM CARBON STEEL BALL & STEM | NACE TRIM 316 SS BALL & STEM | PORT | WP | Α | В | D | Ε | F | G | Н | M | N | LBS. | HANDLE | Cv |
| 1x1x1 | 1F-S42-SE | 1F-S42N-SE | 1 | 1000 | 3.87 | 1.93 | 2.25 | 2.37 | .50 | .340 | .685 | 4.37 | 2.00 | 3.0 | P-333-CS | - |
| 1x1x1 | 1F-S62-SE | 1F-S62N-SE | 1 | 1500 | 3.87 | 1.93 | 2.25 | 2.37 | .50 | .340 | .685 | 4.37 | 2.00 | 3.0 | P-333-CS | - |
| 1x1x1 | 1F-S92-SE | 1F-S92N-SE | 1 | 2000 | 4.00 | 2.00 | 2.50 | 2.37 | .50 | .340 | .685 | 4.37 | 2.00 | 4.0 | P-333-CS | - |
| 2x1.5x2 | 2R-S32-SE | 2R-S32N-SE | 1.5 | 750 | 5.25 | 2.62 | 3.37 | 3.62 | .62 | .434 | .873 | 7.25 | 5.25 | 8.0 | P-4128-CS | 125 |
| 2x1.5x2 | 2R-S42-SE | 2R-S42N-SE | 1.5 | 1000 | 5.25 | 2.62 | 3.37 | 3.62 | .75 | .434 | .873 | 7.25 | 5.25 | 8.0 | P-4128-CS | 125 |
| 2x1.5x2 | 2R-S62-SE | 2R-S62N-SE | 1.5 | 1500 | 5.25 | 2.62 | 3.37 | 3.62 | .75 | .434 | .873 | 7.25 | 5.25 | 8.5 | P-4128-CS | 125 |
| 2x1.5x2 | 2R-S92-SE | 2R-S92N-SE | 1.5 | 2000 | 5.50 | 2.75 | 3.75 | 3.62 | .75 | .434 | .873 | 7.25 | 5.25 | 10.0 | P-4128-CS | 125 |
| 2x2x2 | 2F-S32-SE | 2F-S32N-SE | 2 | 750 | 5.75 | 2.87 | 4.25 | 4.37 | .75 | .497 | .998 | 10.25 | 6.20 | 12.0 | P-4129-CS | - |
| 2x2x2 | 2F-S42-SE | 2F-S42N-SE | 2 | 1000 | 5.75 | 2.87 | 4.25 | 4.37 | .75 | .497 | .998 | 10.25 | 6.20 | 13.0 | P-4129-CS | - |
| 2x2x2 | 2F-S62-SE | 2F-S62N-SE | 2 | 1500 | 6.00 | 3.00 | 4.75 | 4.37 | .75 | .497 | .998 | 10.25 | 6.20 | 15.0 | P-4129-CS | - |
| 2x2x2 | 2F-S92-SE | 2F-S92N-SE | 2 | 2000 | 6.00 | 3.00 | 4.75 | 4.37 | .75 | .497 | .998 | 10.25 | 6.20 | 16.0 | P-4129-CS | - |
| 3x2x3 | 3R-S32-SE | 3R-S32N-SE | 2 | 750 | 7.25 | 3.50 | 4.50 | 4.37 | .75 | .497 | .998 | 10.25 | 6.20 | 17.8 | P-4129-CS | 180 |
| 3x3x3 | 3F-S32-SE | 3F-S32N-SE | 3 | 750 | 8.00 | 4.00 | 6.00 | 5.75 | .87 | .747 | 1.373 | 20.00 | 7.75 | 31.0 | P-4127-DI | - |
| 3x3x3 | 3F-S42-SE | 3F-S42N-SE | 3 | 1000 | 8.75 | 4.37 | 6.00 | 5.75 | .87 | .747 | 1.373 | 20.00 | 7.75 | 35.0 | P-4127-DI | - |
| 4x3x4 | 4R-S32-SE | 4R-S32N-SE | 3 | 750 | 8.75 | 4.37 | 6 | 5.75 | .87 | .747 | 1.373 | 20.00 | 7.75 | 36.0 | P-4127-DI | 525 |
| 4x4x4 | 4F-S22-SE | 4F-S22N-SE | 4 | 500 | 9.37 | 4.68 | 7.50 | 6.37 | 1.06 | .747 | 1.373 | 20.00 | 8.37 | 49.0 | P-4127-DI | - |







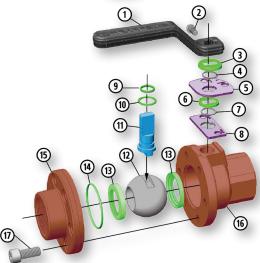

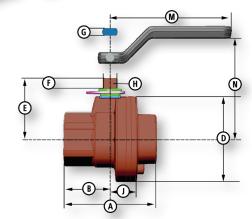

Series F Ductile Iron

- **Lever Operated Ball Valve**
- To 2000 PSI WP
- 1" Through 4"
- Bolted Body Construction
- Meets API 641 Emissions Standard
- High Grade Annealed Ductile Iron for Better
- Corrosion Resistance and Greater Yield Strength
- Multi-Seal Seats
- Bolted Body Protects Against End Adapter Rotation
- Fire Safe Design
- NACE Option With 316 Stainless Steel
- Ball and Stem Available
- Rugged Locking Device Standard
- Maintenance Free

Material Description

| ITEM | PART NAME | MATERIAL (STANDARD) | MATERIAL (NACE) |
|------|------------------------|--|---|
| 1 | Handle* | Carbon Steel/Ductile Iron | Carbon Steel/Ductile Iron |
| 2 | Handle Bolt | Standard Hex Bolt | Standard Hex Bolt |
| 3 | Weather Guard | Polyethylene | Polyethylene |
| 4 | Lock Plate Retainer | Carbon Spring Steel | Carbon Spring Steel |
| 5 | Lock Plate | Carbon Steel | Carbon Steel |
| 6 | Dust Cover | Polyethylene | Polyethylene |
| 7 | Stop Plate Retainer | Carbon Spring Steel | Carbon Spring Steel |
| 8 | Stop Plate | Carbon Steel | Carbon Steel |
| 9 | Stem O-Ring | Buna-N | Fluorocarbon |
| 10 | Stem Seal | TFE | TFE |
| 11 | Stem | Carbon Steel | 316 Stainless Steel |
| 12 | Ball | AISI 1018 Nickel Chrome Plated | 316 Stainless Steel |
| 13 | Ball Seat | Nylon 11 (TFE Optional**) | Nylon 11 (TFE Optional**) |
| 14 | Body O-Ring | Buna-N | Fluorocarbon |
| 15 | End Adapter | ASTM A395 Class 60-40-18 Fully Annealed | ASTM A395 Class 60-40-18 Fully Annealed |
| 16 | Body | ASTM A395 Class 60-40-18 Fully Annealed | ASTM A395 Class 60-40-18 Fully Annealed |
| 17 | Body Bolts | ASTM A-193 B7M | ASTM A193 B7M |

^{*} Handle is optional. Balon valves can also be operated with a standard open-end wrench.

** Seat selection may result in de-rating of pressure. See Seat Pressure Ratings chart on page B-37 for more information.


| SIZE | CATALOG STANDARD TRIM CARBON STEEL BALL & STEM | NUMBER NACE TRIM 316 SS BALL & STEM | PORT | WP | Α | В | D | E | F | G | Н | J | M | N | LBS. | HANDLE | Cv |
|-------------|---|--------------------------------------|------|------|------|------|------|------|------|------|-------|-------|-------|------|------|-----------|-----|
| 1x1x1 | 1F-F92-SE | 1F-F92N-SE | 1 | 2000 | 3.87 | 1.93 | 3.37 | 2.37 | 0.50 | .340 | 0.685 | 1.12 | 4.37 | 2.00 | 4.0 | P-333-CS | - |
| 2x1.5x2 | 2R-F92-SE | 2R-F92N-SE | 1.5 | 2000 | 5.50 | 2.75 | 4.87 | 3.62 | 0.75 | .434 | 0.873 | 1.62 | 7.25 | 5.25 | 12.4 | P-4128-CS | 125 |
| 2x2x2 | 2F-F62-SE | 2F-F62N-SE | 2 | 1500 | 5.75 | 2.87 | 6.12 | 4.37 | 0.87 | .497 | 0.998 | 2.00 | 10.25 | 6.20 | 19.0 | P-4129-CS | • |
| 2x2x2 | 2F-F92-SE | 2F-F92N-SE | 2 | 2000 | 5.75 | 2.87 | 6.12 | 4.37 | 0.87 | .497 | 0.998 | 2.00 | 10.25 | 6.20 | 19.0 | P-4129-CS | - |
| 2.5x2.5x2.5 | 2.5F-F62-SE | 2.5F-F62N-SE | 2.5 | 1500 | 7.00 | 3.50 | 6.87 | 5.25 | 1.06 | .622 | 1.248 | 2.25 | 16.00 | 6.75 | 27.0 | P-4126-DI | - |
| 3x2x3 | 3R-F62-SE | 3R-F62N-SE | 2 | 1500 | 7.25 | 3.62 | 6.75 | 4.37 | 0.87 | .497 | 0.998 | 2.12 | 10.25 | 6.20 | 26.0 | P-4129-CS | 180 |
| 3x2x3 | 3R-F92-SE | 3R-F92N-SE | 2 | 2000 | 7.25 | 3.62 | 6.75 | 4.37 | 0.87 | .497 | 0.998 | 2.12 | 10.25 | 6.20 | 26.0 | P-4129-CS | 180 |
| 3x3x3 | 3F-F42-SE | 3F-F42N-SE | 3 | 1000 | 8.12 | 4.06 | 7.75 | 5.75 | 1.06 | .747 | 1.373 | 2.375 | 20.00 | 7.75 | 40.0 | P-4127-DI | - |
| 4x3x4 | 4R-F32-SE | 4R-F32N-SE | 3 | 750 | 8.62 | 4.31 | 7.75 | 5.75 | 1.06 | .747 | 1.375 | 2.375 | 20.00 | 7.75 | 42.0 | P-4127-DI | 500 |
| 4x3x4 | 4R-F42-SE | 4R-F42N-SE | 3 | 1000 | 8.62 | 4.31 | 7.75 | 5.75 | 1.06 | .747 | 1.375 | 2.375 | 20.00 | 7.75 | 42.0 | P-4127-DI | 500 |
| 4x4x4 | 4F-F32-SE | 4F-F32N-SE | 4 | 750 | 9.37 | 4.68 | 9.25 | 6.37 | 1.06 | .747 | 1.375 | 3.12 | 20.00 | 8.37 | 64.0 | P-4127-DI | - |


^{*} Balon manufactured Actuation Mounting Hardware available. Please see page A-2 for details.

Male x Female Threaded End Connection Male Threaded x Grooved End Connection

Series S Ductile Iron

- Lever Operated Ball Valve
- **750 PSI WP**
- 2" Through 4"
- Threaded Body Construction
- Meets API 641 Emissions Standard
- High Grade Annealed Ductile Iron for Better Corrosion Resistance and Greater Yield Strength
- Multi-Seal Seats
- Fire Safe Design
- NACE Option With 316 Stainless Steel Ball and Stem Available
- Rugged Locking Device Standard

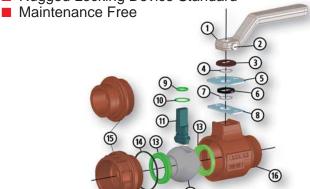

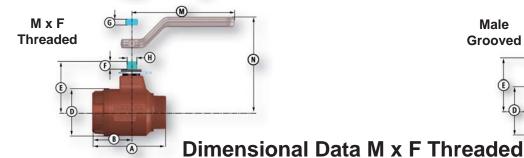





Material Description

| ITEM | PART NAME | MATERIAL (STANDARD) | MATERIAL (NACE) |
|------|---------------------|---------------------------|---------------------------|
| 1 | Handle* | Carbon Steel/Ductile Iron | Carbon Steel/Ductile Iron |
| 2 | Handle Bolt | Standard Hex Bolt | Standard Hex Bolt |
| 3 | Weather Guard | Polyethylene | Polyethylene |
| 4 | Lock Plate Retainer | Carbon Spring Steel | Carbon Spring Steel |
| 5 | Lock Plate | Carbon Steel | Carbon Steel |
| 6 | Dust Cover | Polyethylene | Polyethylene |
| 7 | Stop Plate Retainer | Carbon Spring Steel | Carbon Spring Steel |
| 8 | Stop Plate | Carbon Steel | Carbon Steel |
| 9 | Stem O-Ring | Buna-N | Fluorocarbon |
| 10 | Stem Seal | TFE | TFE |
| 11 | Stem | Carbon Steel | 316 Stainless Steel |
| 12 | Ball | Carbon Steel | 316 Stainless Steel |
| | | Nickel Chrome Plated | |
| 13 | Ball Seat | Nylon (TFE Optional**) | Nylon (TFE Optional**) |
| 14 | Body O-Ring | Buna-N | Fluorocarbon |
| 15 | End Adapter | ASTM A395 Class 60-40-18 | ASTM A395 Class 60-40-18 |
| | Threaded/Grooved | Fully Annealed | Fully Annealed |
| 16 | Body | ASTM A395 Class 60-40-18 | ASTM A395 Class 60-40-18 |
| | | Fully Annealed | Fully Annealed |

* Handle is optional. Balon valves can also be operated with a standard open-end wrench.

** Seat selection may result in de-rating of pressure. See Seat Pressure Ratings chart on page B-37 for more information.

Male Grooved Freaded

| | CATALOG N | NUMBER | | | | | | | | | | | | | | |
|---------|--|------------------------------------|------|-----|------|------|------|------|-----|------|-------|-------|------|------|-----------|-----|
| SIZE | STANDARD TRIM CARBON STEEL BALL & STEM | NACE TRIM 316 SS BALL & STEM | PORT | WP | A | В | D | Ε | F | G | Н | M | N | LBS. | HANDLE | Cv |
| 2x1.5x2 | 2R-S32-MF | 2R-S32N-MF | 1.5 | 750 | 5.00 | 2.68 | 3.37 | 3.62 | .62 | .434 | 0.873 | 7.25 | 5.25 | 8.0 | P-4128-CS | 140 |
| 3x2x3 | 3R-S32-MF | 3R-S32N-MF | 2 | 750 | 6.68 | 3.50 | 4.50 | 4.37 | .75 | .497 | 0.998 | 10.25 | 6.20 | 17.8 | P-4129-CS | 200 |
| 4x3x4 | 4R-S32-MF | 4R-S32N-MF | 3 | 750 | 8.38 | 4.50 | 6.00 | 5.75 | .87 | .747 | 1.373 | 20.00 | 7.75 | 36.0 | P-4127-DI | 550 |

Dimensional Data Male Grooved

| ĺ | | CATALOG N | NUMBER | | | | | | | | | | | | | | |
|---|---------|--|------------------------------------|------|-----|------|------|------|------|-----|------|-------|-------|------|------|-----------|-----|
| | SIZE | STANDARD TRIM CARBON STEEL BALL & STEM | NACE TRIM 316 SS BALL & STEM | PORT | WP | А | В | D | Е | | G | Н | M | N | LBS. | HANDLE | Cv |
| ĺ | 2x1.5x2 | 2R-S32-MG | 2R-S32N-MG | 1.5 | 750 | 5.06 | 2.68 | 3.37 | 3.62 | .62 | .434 | 0.873 | 7.25 | 5.25 | 8.0 | P-4128-CS | 140 |
| Ī | 3x2x3 | 3R-S32-MG | 3R-S32N-MG | 2 | 750 | 6.68 | 3.50 | 4.50 | 4.37 | .75 | .497 | 0.998 | 10.25 | 6.20 | 17.8 | P-4129-CS | 200 |
| Ī | 4x3x4 | 4R-S32-MG | 4R-S32N-MG | 3 | 750 | 8.50 | 4.50 | 6.00 | 5.75 | .87 | .747 | 1.373 | 20.00 | 7.75 | 36.0 | P-4127-DI | 550 |

^{*} Balon manufactured Actuation Mounting Hardware available. Please see page A-2 for details.




Female Threaded x Grooved End Connection



- **Series S Ductile Iron**
- **■** Lever Operated Ball Valve
- **750 PSI WP**
- 2" Through 4"
- Threaded Body Construction

- Meets API 641Emissions Standard
- High Grade Annealed Ductile Iron for Better Corrosion Resistance and Greater Yield Strength
- Multi-Seal Seats
- Fire Safe Design
- NACE Option With 316 Stainless Steel Ball and Stem Available
- Rugged Locking Device Standard
- Maintenance Free

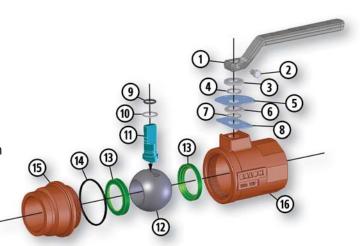

Material Description

| ITEM | PART NAME | MATERIAL (STANDARD) | MATERIAL (NACE) |
|------|---------------------|---------------------------|---------------------------------------|
| 1 | Handle* | Carbon Steel/Ductile Iron | Carbon Steel/Ductile Iron |
| 2 | Handle Bolt | Standard Hex Bolt | Standard Hex Bolt |
| 3 | Weather Guard | Polyethylene | Polyethylene |
| 4 | Lock Plate Retainer | Carbon Spring Steel | Carbon Spring Steel |
| 5 | Lock Plate | Carbon Steel | Carbon Steel |
| 6 | Dust Cover | Polyethylene | Polyethylene |
| 7 | Stop Plate Retainer | Carbon Spring Steel | Carbon Spring Steel |
| 8 | Stop Plate | Carbon Steel | Carbon Steel |
| 9 | Stem O-Ring | Buna-N | Fluorocarbon |
| 10 | Stem Seal | TFE | TFE |
| 11 | Stem | Carbon Steel | 316 Stainless Steel |
| 12 | Ball | Carbon Steel | 316 Stainless Steel |
| | | Nickel Chrome Plated | _ |
| 13 | Ball Seat | Nylon (TFE Optional) | Nylon (TFE Optional) |
| 14 | Body O-Ring | Buna-N | Fluorocarbon |
| 15 | End Adapter | ASTM A395 Class 60-40-18 | ASTM A395 Class 60-40-18 |
| | | Fully Annealed | Fully Annealed |
| 16 | Body | ASTM A395 Class 60-40-18 | ASTM A395 Class 60-40-18 |
| | | Fully Annealed | Fully Annealed |
| | ! | , | , , , , , , , , , , , , , , , , , , , |

| | CATALOG | NUMBER | | | | | | | | | | | | | | |
|---------|--|------------------------------------|------|-----|------|------|------|------|-----|------|-------|-------|------|------|-----------|-----|
| SIZE | STANDARD TRIM CARBON STEEL BALL & STEM | NACE TRIM 316 SS BALL & STEM | PORT | WP | Α | В | D | | F | G | Н | M | N | LBS. | HANDLE | Cv |
| 2x1.5x2 | 2R-S32-SG | 2R-S32N-SG | 1.5 | 750 | 5.50 | 2.68 | 3.37 | 3.62 | .62 | .434 | 0.873 | 7.25 | 5.25 | 8.0 | P-4128-CS | 140 |
| 3x2x3 | 3R-S32-SG | 3R-S32N-SG | 2 | 750 | 7.25 | 3.50 | 4.50 | 4.37 | .75 | .497 | 0.998 | 10.25 | 6.20 | 17.8 | P-4129-CS | 200 |
| 4x3x4 | 4R-S32-SG | 4R-S32N-SG | 3 | 750 | 8.87 | 4.50 | 6.00 | 5.75 | .87 | .747 | 1.373 | 20.00 | 7.75 | 36.0 | P-4127-DI | 550 |

^{*} Balon manufactured Actuation Mounting Hardware available. Please see page A-2 for details.





^{*}Handle is optional. Balon valves can also be operated with a standard open-end wrench.

Grooved End Connection

Series S Ductile Iron

- Lever Operated Ball Valve
- To 1000 PSI WP
- 2" Through 6"
- Threaded Body Construction

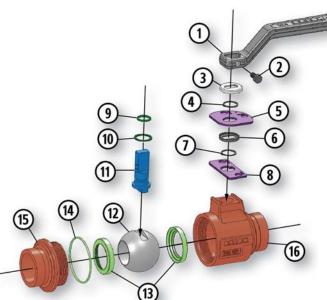

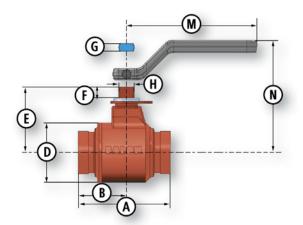



- Meets API 641 Emissions Standard
- High Grade Annealed Ductile Iron for Better Corrosion Resistance and Greater Yield Strength
- Multi-Seal Seats
- Fire Safe Design
- NACE Option With 316 Stainless Steel Ball and Stem Available
- Rugged Locking Device Standard
- Maintenance Free

Material Description

| ITEM | PART NAME | MATERIAL (STANDARD) | MATERIAL (NACE) | | | | | |
|---|---------------|---------------------------|-----------------------------|--|--|--|--|--|
| 1 | Handle* | Carbon Steel/Ductile Iron | Carbon Steel/Ductile Iron | | | | | |
| 2 | Handle Bolt | Standard Hex Bolt | Standard Hex Bolt | | | | | |
| 3 | Weather Guard | Polyethylene | Polyethylene | | | | | |
| 4 | Lock Plate | Carbon Spring Steel | Carbon Spring Steel | | | | | |
| | Retainer | | | | | | | |
| 5 | Lock Plate | Carbon Steel | Carbon Steel | | | | | |
| 6 | Dust Cover | Polyethylene | Polyethylene | | | | | |
| 7 | Stop Plate | Carbon Spring Steel | Carbon Spring Steel | | | | | |
| | Retainer | | | | | | | |
| 8 | Stop Plate | Carbon Steel | Carbon Steel | | | | | |
| 9 | Stem O-Ring | Buna-N | Fluorocarbon | | | | | |
| 10 | Stem Seal | TFE | TFE | | | | | |
| 11 | Stem | Carbon Steel | 316 Stainless Steel | | | | | |
| 12 | Ball | Carbon Steel | 316 Stainless Steel | | | | | |
| | | Nickel Chrome Plated | | | | | | |
| 13 | Ball Seat | Nylon (TFE Optional**) | Nylon (TFE Optional**) | | | | | |
| 14 | Body O-Ring | Buna-N | Fluorocarbon | | | | | |
| 15 | End Adapter | ASTM A395 Class 60-40-18 | ASTM A395 Class 60-40-18 | | | | | |
| | | Fully Annealed | Fully Annealed | | | | | |
| 16 | Body | ASTM A395 Class 60-40-18 | 18 ASTM A395 Class 60-40-18 | | | | | |
| | | Fully Annealed | Fully Annealed | | | | | |
| * Handle is optional. Balon valves can also be operated with a standard | | | | | | | | |

^{*} Handle is optional. Balon valves can also be operated with a standard open-end wrench.

| | CATALOG I | NUMBER | | | | | | | | | | | | | | |
|---------|--|------------------------------------|------|------|-------|------|------|------|------|------|-------|-------|------|------|-----------|-----|
| SIZE | STANDARD TRIM CARBON STEEL BALL & STEM | NACE TRIM 316 SS BALL & STEM | PORT | WP | Α | В | D | E | F | G | Н | M | N | LBS. | HANDLE | Cv |
| 2x1.5x2 | 2R-S32-GE | 2R-S32N-GE | 1.5 | 750 | 5.12 | 2.68 | 3.37 | 3.62 | 0.62 | .434 | 0.873 | 7.25 | 5.25 | 7.5 | P-4128-CS | 140 |
| 2x2x2 | 2F-S32-GE | 2F-S32N-GE | 2 | 750 | 6.00 | 3.12 | 4.25 | 4.37 | 0.75 | .497 | 0.998 | 10.25 | 6.20 | 12.0 | P-4129-CS | - |
| 3x2x3 | 3R-S32-GE | 3R-S32N-GE | 2 | 750 | 7.25 | 3.50 | 4.50 | 4.37 | 0.75 | .497 | 0.998 | 10.25 | 6.20 | 17.0 | P-4129-CS | 200 |
| 3x2x3 | 3R-S42-GE | 3R-S42N-GE | 2 | 1000 | 7.25 | 3.50 | 4.50 | 4.37 | 0.75 | .497 | 0.998 | 10.25 | 6.20 | 17.0 | P-4129-CS | 200 |
| 3x3x3 | 3F-S32-GE | 3F-S32N-GE | 3 | 750 | 7.25 | 3.75 | 6.00 | 5.75 | 0.87 | .747 | 1.373 | 20.00 | 7.75 | 31.0 | P-4127-DI | - |
| 4x3x4 | 4R-S32-GE | 4R-S32N-GE | 3 | 750 | 8.87 | 4.50 | 6.00 | 5.75 | 0.87 | .747 | 1.373 | 20.00 | 7.75 | 34.0 | P-4127-DI | 550 |
| 4x4x4 | 4F-S22-GE | 4F-S22N-GE | 4 | 500 | 8.87 | 4.50 | 7.50 | 6.37 | 1.06 | .747 | 1.373 | 20.00 | 8.37 | 49.0 | P-4127-DI | - |
| 6x4x6 | 6R-S22-GE | 6R-S22N-GE | 4 | 500 | 10.10 | 5.05 | 7.00 | 6.38 | 0.87 | .747 | 1.373 | 20.00 | 8.38 | 57.0 | P-4127-DI | 800 |



^{**} Seat selection may result in de-rating of pressure. See Seat Pressure Ratings chart on page B-37 for more information.

^{*} Balon manufactured Actuation Mounting Hardware available. Please see page A-2 for details.


Flanged End Connection


Series F Ductile Iron

- Lever Operated Ball Valve
- ANSI Class 150 (250 PSI WP)
 Raised or Flat Face
- 2" Through 6"
- Bolted Body Construction
- Meets API 641 Emissions Standard
- High Grade Annealed Ductile Iron for Better Corrosion Resistance and Greater Yield Strength
- Multi-Seal Seats
- Fire Safe Design
- NACE Option With 316 Stainless Steel Ball and Stem Available
- Rugged Locking Device Standard
- Maintenance Free Sealing Improvement Over Lubricated Ball Valves and Cast Iron Plug Valves
- Eliminates High Maintenance of Lubricated Valves

Material Description

| ITEM | PART NAME | MATERIAL (STANDARD) | MATERIAL (NACE) |
|------|------------------------|--------------------------------------|---------------------------|
| 1 | Handle* | Carbon Steel/Ductile Iron | Carbon Steel/Ductile Iron |
| 2 | Handle Bolt | Standard Hex Bolt | Standard Hex Bolt |
| 3 | Weather Guard | Polyethylene | Polyethylene |
| 4 | Lock Plate Retainer | Carbon Spring Steel | Carbon Spring Steel |
| 5 | Lock Plate | Carbon Steel | Carbon Steel |
| 6 | Dust Cover | Polyethylene | Polyethylene |
| 7 | Stop Plate | Carbon Spring Steel | Carbon Spring Steel |
| | Retainer | | |
| 8 | Stop Plate | Carbon Steel | Carbon Steel |
| 9 | Stem O-Ring | Buna-N | Fluorocarbon |
| 10 | Stem Seal | TFE | TFE |
| 11 | Stem | Carbon Steel | 316 Stainless Steel |
| 12 | Ball | Carbon Steel Nickel Chrome Plated | 316 Stainless Steel |
| 13 | Ball Seat | Nylon (TFE Optional) | Nylon (TFE Optional) |
| 14 | Body O-Ring | Buna-N | Fluorocarbon |
| 15 | End Adapter | ASTM A395 Class 60-40-18 | ASTM A395 Class 60-40-18 |
| | | Fully Annealed | Fully Annealed |
| 16 | Body | ASTM A395 Class 60-40-18 | ASTM A395 Class 60-40-18 |
| | | Fully Annealed | Fully Annealed |
| 17 | Nuts | ASTM A194 2H | ASTM A194 2HM |
| 18 | Body Bolts | ASTM A193 B7 | ASTM A193 B7M |

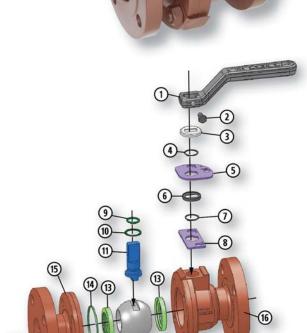



*Handle is optional. Balon valves can also be operated with a standard open-end wrench.

| | | | _ | | | | | | | • | | | | | | |
|---------|---|--|------|-----|-------|------|------|------|------|------|-------|-------|------|------|-----------|-----|
| SIZE | CATALOG N STANDARD TRIM CARBON STEEL BALL & STEM | NUMBER NACE TRIM 316 SS BALL & STEM | PORT | WP | А | В | D | E | F | G | Н | M | N | LBS. | HANDLE | Cv |
| 2x1.5x2 | 2R-F12 | 2R-F12N | 1.5 | 250 | 7.00 | 3.25 | 5.00 | 3.62 | .75 | .434 | .873 | 7.25 | 5.25 | 23 | P-4128-CS | 125 |
| 2x2x2 | 2F-F12 | 2F-F12N | 2 | 250 | 7.00 | 2.75 | 6.00 | 4.37 | .87 | .497 | .998 | 10.25 | 6.20 | 28 | P-4129-CS | - |
| 3x2x3 | 3R-F12 | 3R-F12N | 2 | 250 | 8.00 | 3.00 | 6.00 | 4.37 | .75 | .497 | .998 | 10.25 | 6.20 | 30 | P-4129-CS | 200 |
| 3x3x3 | 3F-F12 | 3F-F12N | 3 | 250 | 8.00 | 3.56 | 7.50 | 5.75 | 1.06 | .747 | 1.373 | 20 | 7.75 | 54 | P-4127-DI | - |
| 4x3x4 | 4R-F12 | 4R-F12N | 3 | 250 | 9.00 | 4.06 | 7.87 | 5.75 | .87 | .747 | 1.373 | 20 | 7.75 | 65 | P-4127-DI | 525 |
| 4x4x4 | 4F-F12 | 4F-F12N | 4 | 250 | 9.00 | 4.06 | 9.00 | 6.37 | 1.06 | .747 | 1.373 | 20 | 8.37 | 80 | P-4127-DI | - |
| 6x4x6 | 6R-F12** | 6R-F12N** | 4 | 250 | 10.50 | 3.81 | | 6.37 | .87 | .747 | 1.373 | 20 | 8.37 | 75 | P-4127-DI | 800 |

^{**} Uni-body design.




^{*} Balon manufactured Actuation Mounting Hardware available. Please see page A-2 for details.

Threaded End Connection

Series S "9D" Nickel Aluminum Bronze

- ASTM B148 GR 955 "9D"
- **Lever Operated Ball Valve**
- To 1000 PSI WP
- 2" Through 4"
- Threaded Body Construction

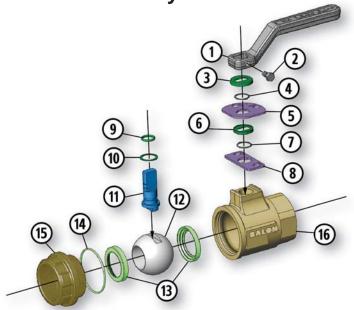



- Meets API 641 Emissions Standard
- Enhanced Protection Against CO₂ and Saltwater Corrosion
- NACE Standard
- Multi-Seal Seats
- Fire Safe Design
- Minimizes Risk of Galling Associated with Stainless Steel
- Exceptional Yield Strength
- Rugged Locking Device Standard
- Maintenance Free

(G)

Material Description

| ITEM | PART NAME | MATERIAL NACE (STANDARD) |
|------|---------------------|---------------------------|
| 1 | Handle* | Carbon Steel/Ductile Iron |
| 2 | Handle Bolt | Standard Hex Bolt |
| 3 | Weather Guard | Polyethylene |
| 4 | Lock Plate Retainer | Stainless Steel |
| 5 | Lock Plate | Stainless Steel |
| 6 | Dust Cover | Polyethylene |
| 7 | Stop Plate Retainer | Stainless Steel |
| 8 | Stop Plate | Stainless Steel |
| 9 | Stem O-Ring | Fluorocarbon |
| 10 | Stem Seal | TFE |
| 11 | Stem | 316 Stainless Steel |
| 12 | Ball | 316 Stainless Steel |
| 13 | Ball Seat | Nylon (TFE Optional) |
| 14 | Body O-Ring | Fluorocarbon |
| 15 | End Adapter | ASTM B148-9D (955) |
| 16 | Body | ASTM B148-9D (955) |

Retainer Stainless Steel
Stainless Steel
ng Fluorocarbon
TFE
316 Stainless Steel
316 Stainless Steel
Nylon (TFE Optional)
ng Fluorocarbon
er ASTM B148-9D (955)
ASTM B148-9D (955)

| SIZE | CATALOG | PORT | WP | Α | В | D | Е | F | G | Н | M | N | LBS. | HANDLE | Cv |
|---------|------------|------|------|------|------|------|------|------|------|-------|-------|------|------|-----------|-----|
| 2x1.5x2 | 2R-S44N-SE | 1.5 | 1000 | 5.25 | 2.66 | 3.38 | 3.66 | .75 | .434 | .873 | 7.25 | 5.25 | 7.5 | P-4128-CS | 125 |
| 2x2x2 | 2F-S44N-SE | 2 | 1000 | 5.75 | 2.88 | 4.25 | 4.38 | .75 | .497 | .998 | 10.25 | 6.20 | 12 | P-4129-CS | - |
| 3x2x3 | 3R-S44N-SE | 2 | 1000 | 7.25 | 3.50 | 4.50 | 4.38 | .75 | .497 | .998 | 10.25 | 6.20 | 17 | P-4129-CS | 180 |
| 3x3x3 | 3F-S44N-SE | 3 | 1000 | 8.75 | 4.38 | 6 | 5.75 | .88 | .747 | 1.373 | 20 | 7.75 | 31 | P-4127-DI | - |
| 4x3x4 | 4R-S44N-SE | 3 | 1000 | 8.75 | 4.38 | 6 | 5.75 | .88 | .747 | 1.373 | 20 | 7.75 | 36 | P-4127-DI | 525 |
| 4x4x4 | 4F-S34N-SE | 4 | 750 | 9.38 | 4.69 | 7 | 6.38 | 1.06 | .747 | 1.373 | 20 | 8.38 | 52 | P-4127-DI | - |

^{*} Balon manufactured Actuation Mounting Hardware available. Please see page A-2 for details.



^{*}Handle is optional. Balon valves can also be operated with a standard open-end wrench.

Threaded End Connection


Series F "9D" Nickel Aluminum Bronze

- ASTM B148 GR 955 "9D"
- Lever Operated Ball Valve
- To 3000 PSI WP
- 1" Through 2"
- Bolted Body Construction

Material Description


| ITEM | PART NAME | MATERIAL NACE (STANDARD) |
|------|---------------------|--------------------------|
| 1 | Handle* | Carbon Steel |
| 2 | Handle Bolt | Standard Hex Bolt |
| 3 | Weather Guard | Polyethylene |
| 4 | Lock Plate Retainer | Stainless Steel |
| 5 | Lock Plate | Stainless Steel |
| 6 | Dust Cover | Polyethylene |
| 7 | Stop Plate Retainer | Stainless Steel |
| 8 | Stop Plate | Stainless Steel |
| 9 | Stem O-Ring | Fluorocarbon |
| 10 | Stem Seal | TFE |
| 11 | Stem | 316 Stainless Steel |
| 12 | Ball | 316 Stainless Steel |
| 13 | Ball Seat | Nylon (TFE Optional) |
| 14 | Body O-Ring | Fluorocarbon |
| 15 | End Adapter | ASTM B148-9D (955) |
| 16 | Body | ASTM B148-9D (955) |
| 17 | Body Stud Bolts | ASTM A193 B7M |

^{*}Handle is optional. Balon valves can also be operated with a standard open-end wrench.

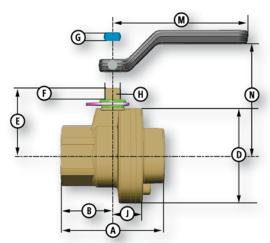



- Meets API 641 Emissions Standard
- Enhanced Protection Against CO₂ and Saltwater Corrosion
- NACE Standard
- Minimizes Risk of Galling Associated with Stainless Steel
- Exceptional Yield Strength
- Multi-Seal Seats
- Fire Safe Design
- Rugged Locking Device Standard
- Maintenance Free

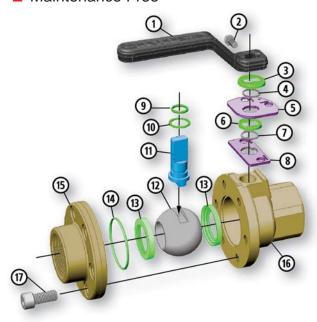

| SIZE | CATALOG | PORT | WP | Α | В | D | Е | F | G | Н | J | M | N | LBS. | HANDLE | Cv |
|---------|------------|------|------|------|------|------|------|-----|------|------|------|-------|------|------|-----------|-----|
| 1x1x1 | 1F-F04N-SE | 1 | 3000 | 3.87 | 1.93 | 3.37 | 2.37 | .50 | .340 | .685 | 1.12 | 4.37 | 2 | 4 | P-333-CS | - |
| 2x1.5x2 | 2R-F04N-SE | 1.5 | 3000 | 5.50 | 2.75 | 4.87 | 3.62 | .75 | .434 | .873 | 1.62 | 7.25 | 5.25 | 12.5 | P-4128-CS | 125 |
| 2x2x2 | 2F-F94N-SE | 2 | 2000 | 5.75 | 2.87 | 6.12 | 4.37 | .87 | .497 | .998 | 2 | 10.25 | 6.20 | 19 | P-4129-CS | - |

^{*} Balon manufactured Actuation Mounting Hardware available. Please see page A-2 for details.



Grooved End Connection

Series S "9D" **Nickel Aluminum Bronze**


- ASTM B148 GR 955 "9D"
- Lever Operated Ball Valve
- To 1000 PSI WP
- 2" Through 6"
- Threaded Body Construction
- Meets API 641 Emissions Standard
- Enhanced Protection Against CO₂ and Saltwater Corrosion
- Multi-Seal Seats
- Fire Safe Design
- NACE Standard
- Minimizes Risk of Galling Associated with Stainless Steel
- Exceptional Yield Strength
- Rugged Locking Device Standard
- Maintenance Free

Material Description


| ITEM | PART NAME | MATERIAL NACE (STANDARD) |
|------|---------------------|---------------------------|
| 1 | Handle* | Carbon Steel/Ductile Iron |
| 2 | Handle Bolt | Standard Hex Bolt |
| 3 | Weather Guard | Polyethylene |
| 4 | Lock Plate Retainer | Stainless Steel |
| 5 | Lock Plate | Stainless Steel |
| 6 | Dust Cover | Polyethylene |
| 7 | Stop Plate Retainer | Stainless Steel |
| 8 | Stop Plate | Stainless Steel |
| 9 | Stem O-Ring | Fluorocarbon |
| 10 | Stem Seal | TFE |
| 11 | Stem | 316 Stainless Steel |
| 12 | Ball | 316 Stainless Steel |
| 13 | Ball Seat | Nylon 11 (TFE Optional**) |
| 14 | Body O-Ring | Fluorocarbon |
| 15 | End Adapter | ASTM B148-9D (955) |
| 16 | Body | ASTM B148-9D (955) |

^{*} Handle is optional. Balon valves can also be operated with a



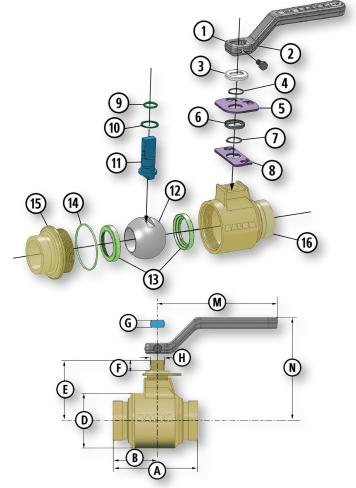

| | CATALOG NUMBER | | | | | | | | | | | | | | |
|---------|------------------------------------|------|------|-------|------|------|------|------|------|-------|-------|------|------|-----------|-----|
| SIZE | NACE TRIM 316 SS BALL & STEM | PORT | WP | Α | В | D | Е | F | G | Н | M | N | LBS. | HANDLE | Cv |
| 2x1.5x2 | 2R-S44N-GE | 1.5 | 1000 | 5.12 | 2.68 | 3.37 | 3.62 | .62 | .434 | .873 | 7.25 | 5.25 | 7.5 | P-4128-CS | 140 |
| 2x2x2 | 2F-S44N-GE | 2 | 1000 | 6.00 | 3.12 | 4.25 | 4.37 | .75 | .497 | .998 | 10.25 | 6.20 | 12 | P-4129-CS | - |
| 3x2x3 | 3R-S44N-GE | 2 | 1000 | 7.25 | 3.50 | 4.50 | 4.37 | .75 | .497 | .998 | 10.25 | 6.20 | 16 | P-4129-CS | 200 |
| 3x3x3 | 3F-S44N-GE | 3 | 1000 | 7.25 | 3.75 | 6.00 | 5.75 | .87 | .747 | 1.373 | 20 | 7.75 | 30 | P-4127-DI | - |
| 4x3x4 | 4R-S44N-GE | 3 | 1000 | 8.87 | 4.50 | 6.00 | 5.75 | .87 | .747 | 1.373 | 20 | 7.75 | 34 | P-4127-DI | 550 |
| 4x4x4 | 4F-S34N-GE | 4 | 750 | 8.87 | 4.50 | 7.50 | 6.37 | 1.06 | .747 | 1.373 | 20 | 8.37 | 48 | P-4127-DI | - |
| 6x4x6 | 6R-S34N-GE | 4 | 750 | 10.10 | 5.05 | 7.00 | 6.38 | .87 | .747 | 1.373 | 20 | 8.38 | 57 | P-4127-DI | 800 |





standard open-end wrench.

** Seat selection may result in de-rating of pressure. See Seat
Pressure Ratings chart on page B-37 for more information.

Grooved End Connection

Series F "9D" Nickel Aluminum Bronze


- ASTM B148 GR 955 "9D"
- Lever Operated Ball Valve
- **2000 PSI WP**
- 2"
- Bolted Body Construction
- Meets API 641 Emissions Standard
- Enhanced Protection Against CO₂ and Saltwater Corrosion
- Multi-Seal Seats
- Fire Safe Design
- NACE Standard
- Minimizes Risk of Galling Associated with Stainless Steel
- Exceptional Yield Strength
- Rugged Locking Device Standard
- Maintenance Free


Material Description

| ITEM | PART NAME | MATERIAL NACE (STANDARD) |
|------|---------------------|--------------------------|
| 1 | Handle* | Carbon Steel |
| 2 | Handle Bolt | Standard Hex Bolt |
| 3 | Weather Guard | Polyethylene |
| 4 | Lock Plate Retainer | Stainless Steel |
| 5 | Lock Plate | Stainless Steel |
| 6 | Dust Cover | Polyethylene |
| 7 | Stop Plate Retainer | Stainless Steel |
| 8 | Stop Plate | Stainless Steel |
| 9 | Stem O-Ring | Fluorocarbon |
| 10 | Stem Seal | TFE |
| 11 | Stem | 316 Stainless Steel |
| 12 | Ball | 316 Stainless Steel |
| 13 | Ball Seat | Nylon (TFE Optional) |
| 14 | Body O-Ring | Fluorocarbon |
| 15 | End Adapter | ASTM B148-9D (955) |
| 16 | Body | ASTM B148-9D (955) |
| 17 | Body Bolts | ASTM A193 B7M |

^{*}Handle is optional. Balon valves can also be operated with a standard open-end wrench.



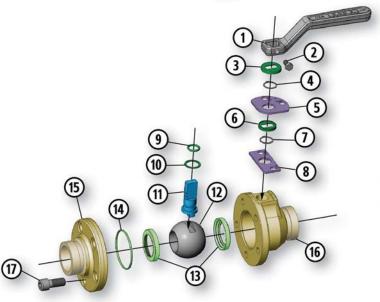

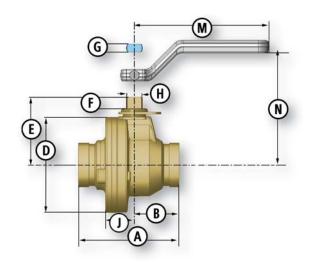

| SIZE | CATALOG | PORT | WP | Α | В | D | Е | F | G | Н | J | M | N | LBS. | HANDLE | Cv |
|---------|------------|------|------|-----|------|------|------|-----|------|------|------|------|------|------|-----------|-----|
| 2x1.5x2 | 2R-F94N-GE | 1.5 | 2000 | 5.5 | 2.75 | 4.87 | 3.62 | .75 | .497 | .873 | 1.62 | 7.25 | 5.25 | 11.5 | P-4128-CS | 140 |

^{*} Balon manufactured Actuation Mounting Hardware available. Please see page A-2 for details.



Threaded End Connection

Series LS Threaded End Stainless Steel




Material Description

| ITEM | PART NAME | MATERIAL (STANDARD) |
|------|---------------|---------------------------|
| 1 | Weather Guard | Polyethylene |
| 2 | Stem Nut | Stainless Steel |
| 3 | Spacer | Stainless Steel |
| 4 | Lock Plate | Stainless Steel |
| 5 | Handle* | Stainless Steel |
| 6 | Stem Washer | Acetal |
| 7 | Stop Pin | Stainless Steel |
| 8 | Stem O-Ring | Fluorocarbon |
| 9 | Stem Seal | TFE |
| 10 | Stem | 316 Stainless Steel |
| 11 | Body | 316 Stainless Steel |
| 12 | Ball Seat | Nylon 11 (TFE Optional**) |
| 13 | Ball | 316 Stainless Steel |
| 14 | Body O-Ring | Fluorocarbon |
| 15 | Adapter | 316 Stainless Steel |

^{*} Handle and locking device standard on all Series LS Ball Valves.

** Seat selection may result in de-rating of pressure. See Seat
Pressure Ratings chart on page B-37 for more information.

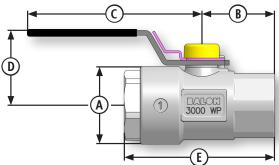


■ Lever Operated Ball Valve

- To 3000 PSI WP
- 1/4" Through 1"

■ Threaded Body Construction

- Meets API 641Emissions Standard
- Multi-Seal Seats
- NACE Standard
- Exclusive Patented Design Inhibits Loosening of End Adapter
- All Metal Components Made of Stainless Steel
- Maintenance Free
- Fire Safe Design

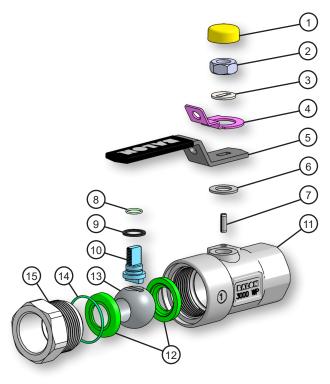

| SIZE | CATALOG | PORT | WP | Α | В | С | D | Ε | LBS. | Cv |
|-------------|----------|------|------|------|------|------|------|------|------|----|
| .25x.37x.25 | LS-02562 | .37 | 2000 | 1.37 | 1.12 | 3.50 | 1.62 | 2.62 | 0.91 | - |
| .25x.37x.25 | LS-02592 | .37 | 3000 | 1.37 | 1.12 | 3.50 | 1.62 | 2.62 | 0.91 | - |
| .50x.37x.50 | LS-05561 | .37 | 2000 | 1.37 | 1.12 | 3.50 | 1.62 | 2.50 | 0.75 | 6 |
| .50x.37x.50 | LS-05591 | .37 | 3000 | 1.37 | 1.43 | 3.50 | 1.62 | 3.00 | 1.00 | 6 |
| .50x.50x.50 | LS-05562 | .50 | 2000 | 1.58 | 1.38 | 3.50 | 1.96 | 3.00 | 2.50 | - |
| .50x.50x.50 | LS-05592 | .50 | 3000 | 1.58 | 1.38 | 3.50 | 1.96 | 3.00 | 2.50 | - |
| .75x.75x.75 | LS-07562 | .75 | 2000 | 2.12 | 1.75 | 4.87 | 2.25 | 3.75 | 2.50 | - |
| .75x.75x.75 | LS-07592 | .75 | 3000 | 2.12 | 1.75 | 4.87 | 2.25 | 3.75 | 2.50 | - |
| 1x.75x1 | LS-10561 | .75 | 2000 | 2.12 | 1.87 | 4.87 | 2.25 | 3.75 | 2.00 | 30 |
| 1x.75x1 | LS-10591 | .75 | 3000 | 2.12 | 2.00 | 4.87 | 2.25 | 4.12 | 2.50 | 30 |



Ball Valve Accessories

| SIZE & PORT | PART NO. | LBS. | LENGTH | IMAGE |
|--|------------------|------|--------|----------------|
| 1" Full Port | P-333-CS* | 0.25 | 4 3/8" | CALON (1) |
| 1.5" Full - 2" Reg Port | P-4128-CS** | 1.25 | 8 1/4" | CUSA DOBODINES |
| 2" Full - 3" Reg Port P-4129-CS** | | 1.75 | 11" | USA BALON 4128 |
| 2.5" Full Port | P-4126-DI** | 3.00 | 11" | |
| 3" Full - 6" Reg Port P-4127-DI** | | 4.00 | 18" | |
| 1" Full - 6" Reg Port Flat | P-982-CS-CH | 0.10 | N/A | |
| 1.5" Full - 6" Reg Port Round | P-1243-CS | 0.10 | N/A | posso |
| 1.5" Full - 2" Reg Port | 2SQ-1.5 BORE-KIT | 1.00 | 2" | |
| 2" Full - 3" Reg Port | 2SQ-2 BORE-KIT | 1.00 | 2" | |
| 3" Full - 4" Reg Port 2SQ-3 OR 4 BORE-KIT | | 1.00 | 2" | |
| All Balon Gear Operators 2-SQ-NUT | | 2.00 | 2" | |

^{*}Optional handle. Held on with snap ring.



^{**}Optional handle. Held in place with set-screw.

Consult ball valve dimensional data tables for corresponding handle part numbers.

Application Guide

Application Guide

This Balon "Media and Application Guide" provides assistance to the engineer in selecting the best material for a particular service. The final selection of materials however, requires the judgement of the user because it may be necessary to sacrifice certain physical properties of a material to take better advantage of others.

Information contained in the following chart is believed to be reliable and is intended to be used by trained personnel at their own discretion and risk. Due to many factors which affect the rate of corrosion, we suggest that final acceptability be established by test under actual operating conditions.

Ratings are based on media at ambient temperatures except as noted.

E - Excellent

G - Good

F - Fair

U - Unsatisfactory

BLANK - Insufficient Data

| VAL | | | | | | D SEA | L |
|---------------------------------|--------------|--------------|-----------|--------|-------|----------|-----|
| MATER | RIAL | | | N | IATEI | RIAL | |
| Media * | bon Steel | tile Iron | 316 SS | Buna-N | Viton | Nylon | TFE |
| Air | Е | E | Е | Е | Е | E | Е |
| Alcohols | G | G | Е | Е | Е | F | Е |
| Amines (conc.) | Ε | Ε | Ε | U | U | Ε | Ε |
| Ammonia, Anhydrous | Е | G | Ε | F | U | E | Е |
| - Aqueous | Ε | E | Ε | F | U | G | Ε |
| - Solutions | G | G | E | F | U | G | Ε |
| Benzene or Benzol | G | G | E | U | E | E | Ε |
| Brines | F | F | G | Е | Е | E | Е |
| Bunker Oils (Fuels) | G | G | E | E | E | E | E |
| Butane | Е | E | Е | Е | Е | E | Е |
| Carbolic Acid (Phenol) | U | U | G | U | G | U | E |
| Carbon Dioxide, Dry | Е | F | Ε | G | G | G | Е |
| Carbonic Acid | U | U | G | G | E | E | Ε |
| Carbon Tetrachloride, Dry | F | F | Е | U | Е | Е | Е |
| -Wet | U | U | G | U | Ε | E | Ε |
| Carbonated Water | G | G | E | Е | Е | G | Ε |
| Crude Oil, Sweet | Ε | E | Ε | Ε | Ε | E | Ε |
| - Sour | G | G | Ε | F | G | G | Ε |
| Diethylamine (DEA) | Ε | Ε | Ε | U | U | Ε | Ε |
| Diesel Fuels | Е | Е | Е | Е | Е | Е | Е |
| Dowtherm A and E | G | G | Ε | U | Ε | Ε | Е |
| Drilling Mud | G | G | E | Е | Е | E | Ε |
| Ethane | E | E | Ε | Ε | E | E | Ε |
| Ethylene | Е | E | Ε | U | Е | E | Ε |
| Ethylene Glycol | G | G | G | Е | Ε | G | Ε |
| Fuel Oil | G | G | Ε | Е | Е | E | Е |
| Gas, Manufactured | G | G | G | Е | Ε | E | Е |
| - Natural | G | G | Е | Е | Е | E | Е |
| - Odorizers | G | G | Ε | U | Ε | G | Ε |
| - Sour | G | G | E | F | E | E | Ε |
| Gasoline, Leaded | E | G | E | G | E | E | Ε |
| - Unleaded | E | G | E | F | E | E | Ε |
| - Aviation | E | G | Е | G | E | E | E |
| - Motor | Е | G | Е | F | Е | E | E |
| Glycols | G | G | G | E | E | G | E |
| Heptane | Е | Е | Е | Е | Е | Е | Е |
| Hexane | E | E | E | E | E | E | E |
| Hydraulic Oil | | | | | | | |
| - Petroleum Base | E | E | E | E | E | <u>E</u> | E |
| - Phosphate Base | E | E | E | U | E | E | E |
| Hydrocloric Acid | | | | | | | |
| -Air Free | U | U | U | F | E | U | E |
| Hydrofloric Acid | U | U | U | U | U | U | F |
| Hydrogen Gas | G | G | E | E | Е | E | Е |
| Hydrogen Sulfide, Dry(Conc.) | G | G | E | F | F | E | Е |
| Wet(Conc.) | F | U | G | U | F | E | Е |
| Illuminating Gas | Е | E | Е | Е | Е | | Е |
| Iso-Octane | Е | G | Е | Е | E | Е | Ε |

| VAL | VE | | | SEA | T AN | D SEA | \L |
|---------------------------|-------------|--------------|-----|----------|-------|-------|------------|
| MATE | RIAL | | | | IATEI | | |
| Media * | Car- bon | Duc- tile | 316 | Buna-N | Viton | Mylon | TFE |
| ivieuia | Steel | Iron | SS | Dulla-iv | Viton | Nylon | IFE |
| Isopropyl Alcohol | G | G | G | G | Е | G | E |
| - Ether | Е | G | Ε | G | U | Е | Е |
| JP-4 Fuel | Е | Е | Е | Е | Е | Е | E |
| JP-5 Fuel | Е | Е | Е | Е | Е | Е | Е |
| JP-6 Fuel | Е | Е | Е | Е | Е | Е | Е |
| Kerosene | G | G | Е | Е | Е | E | Е |
| Liquified Pet. Gas (LPG) | G | G | G | Ε | Ε | Е | E |
| Lubricating Oil | E | Е | Ε | Е | Е | E | E |
| Mercaptan (Conc.) | G | G | E | F | E | G | E |
| Methane | E | E | E | E | E | E | E |
| Muratic Acid | U | U | U | G | E | U | E |
| Naphtha | G | G | E | G | E | E | E |
| Naphthalene | E | G | E | U | E | E | _ <u>E</u> |
| Natural Gas | E | E | E | E | E | E | E |
| Nitrogen | E | E | E | E | E | E | E |
| Oil, Animal | E | E | E | E | E | | E |
| - Cottonseed | F | F | G | E | E | E | _ <u>E</u> |
| - Fish | G | G | E | E | E | E | E |
| - Fuel | G | G | E | E | E | E | E |
| - Lube | E | E | E | E | E | E | E |
| - Mineral | G | G | E | E | E | E | E |
| - Petroleum, Refined | E | G | Е | Е | E | Е | Е |
| Oil-Water Mixtures | E | E | E | E | E | E | E |
| Parafin | G | G | Е | G | Е | Е | Е |
| Pentane | G | G | E | U | E | E | E |
| Producer Gas | G | G | G | Е | Е | Е | Е |
| Propane | E | E | E | E | E | E | E |
| Propyl Alcohol | E | Е | Е | Е | E | E | E |
| Propylene Glycol | E | E | Ε | Е | E | F | E |
| Sea Water | U | U | Е | Е | E | E | E |
| Sodium Acetate | G | G | G | G | U | G | E |
| - Hydroxide, Cold, 20% | E | Е | Е | G | G | E | Е |
| - Hydroxide, Hot, 20% | F | F | G | G | G | G | E |
| - Hydroxide, Cold, 50% | G | G | G | F | F | F | F |
| - Hydroxide, Hot, 50% | G | G | G | U | F | U | F |
| - Hydroxide, Cold, 70% | F | F | G | U | F | | F |
| - Hydroxide, Hot, 70% | G | F | G | U | F | | U |
| Steam (212° F) | E | Е | Е | U | U | U | E |
| Stoddard Solvent | G | G | G | Е | E | G | E |
| Sulfur Dioxide (Dry) | G | G | Е | U | U | F | Е |
| Sulfuric Acid, 0-7% | F | F | G | F | E | G | Е |
| - 20% | U | U | F | U | E | U | E |
| - 50% | U | U | U | U | E | U | E |
| - 100% | U | U | U | U | E | U | Е |
| Toluene or Toluol | Е | E | Е | U | E | E | Е |
| Water, Distilled, Aerated | U | U | Е | Е | G | E | Е |
| - Fresh | F | F | Е | Е | Е | Е | Е |
| - Sea | U | U | Е | Е | Е | Е | Е |
| Wax Emulsions | Е | G | Ε | Ε | Е | Е | Е |
| Waxes | Е | Е | Е | Е | Е | Е | Е |
| Xylene, Dry | Е | Е | Е | U | Е | E | E |
| | | | | | | | |

^{*} Consult Oklahoma City office for compatibility of Nickel Aluminum Bronze Material



Flow Coefficient Data/Standards & Specs

Flow Coefficient Data

Cv Ratings of Full Bore Valve

Depending upon pipe schedule with which they are used. Balon full bore valves have bore sizes exceeding or nearly equaling the pipe inside diameter. The best method of computing system pressure losses is to consider the valve an equivalent length of pipe.

Using the Cv method of rating full bore valves does not provide good accuracy. The reason for this is that Cv tests do not provide valid data until the measured pressure drop equals at least 2 psi. In the relatively short length involved in a valve,

ANSI-B.....(B1.20.1) - Pipe Threads General Purpose (Inch)

extremely high velocities are required to generate that pressure drop.

At these high velocities (which are well beyond those used in industry), other effects such as vibration and pulsation are then created by "super turbulent" flow. The net results are Cv ratings which are lower than would be derived if pressure losses could be consistently measured at velocities in the usable range.

Cv data for reduced port valves are listed on the product pages.

For more information visit our website at www.balon.com

Standards and Specifications

Balon utilizes the following standards in the manufacture of ball valves. It should be noted that not all styles, configurations and materials used in Balon valves meet all of these standards in their entirety.

The user therefore, should specify a given standard if there is a need to assure total compliance with a given standard.

| | . (American Petroleum Institute) | MSS | (Manufacturers Standardization |
|---------|--|---------------|-----------------------------------|
| API-641 | . Type Testing of Quarter Turn Valves | MSS-SP6 | Standard Finishes For Contact |
| | For Fugitive Emissions | | Pipe Flanges And Connection |
| API-6FA | . Fire Test For Resilient-Seated Valves | | Flanges Of Valves And Fittings |
| API 5B | . Inspection Of Threads | MSS-SP25 | Standard Marking System For |
| API-6D | . Specification for Pipeline and Piping Valves | | Flanges And Fittings |
| API-Q1 | . Quality Programs | MSS-SP72 | Ball Valves With Flanged Or Bu |
| API-594 | . Wafer Check Valves | | Welding Ends For General Ser |
| ANSI | . (American National Standard Institute) | NACE MR-01-75 | .Sulfide Stress Cracking, Resist |
| ANSI-B | . 16.5 - Pipe Flanges And Flanged Fittings | | Metallic Material For Oil Field E |
| ANSI-B | . 16.10 - Face-To-Face End-To-End | | Materials Are Optional And Mus |
| | Dimensions | | On Purchase Orders) |
| ANSI-B | . 16.42 Ductile Iron Pipe Flanges And | | |
| | Flanged Fittings | | |
| ANSI-B | . 16.34 - Valves - Flanged End, | | |
| | Threaded And Butt Weld | | |

on Society) ct Faces Of End

r Valves, Fittings,

Butt ervice

> Equipment (NACE ust Be Specified


CE marking to the PED available on most products

Balon valves contain grease and are not suitable for oxygen service due to an increased risk of combustion or explosion.



Seat Pressure Ratings

Seat Pressure & Temperature Ratings

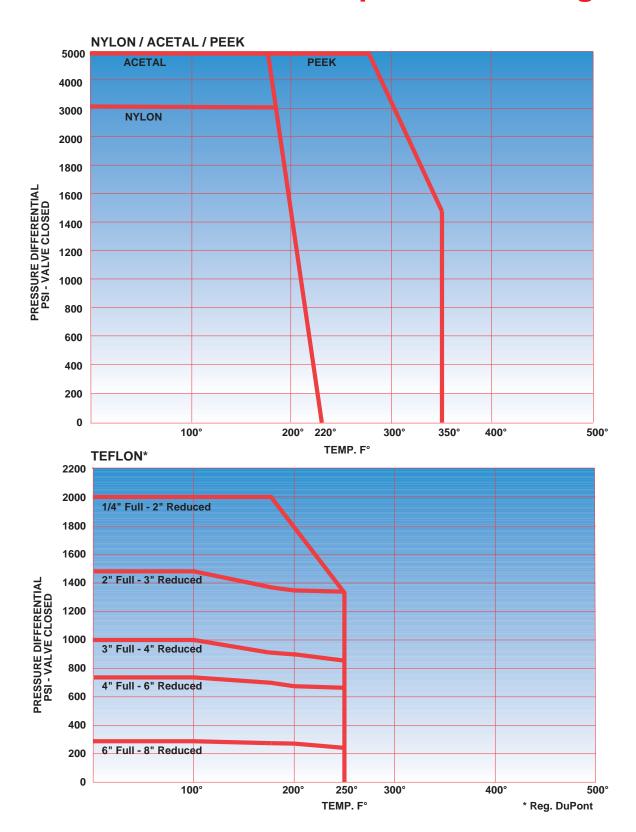

All Balon valves are rated for a minimum temperature of -20° F except for valves designated as low temperature valves, which are rated for a minimum temperature of -50° F.



Trunnion Ball Valves








TRUNNION BALL VALVES

| TRUNNION BALL VALVES | T-1 |
|---|---|
| TRUNNION VALVE IDENTIFICATION KEY | T-2 |
| Trunnion Ball Valve Features | T-3 |
| SERIES T BALL VALVES | |
| Carbon Steel, ANSI 150, 285 PSI WP (10" Through 12") Carbon Steel, ANSI 300, 740 PSI WP (8" Through 12") Carbon Steel, ANSI 600, 1480 PSI WP (4" Through 12") Carbon Steel, ANSI 900, 2220 PSI WP (4") | T-4, T-5 T-6, T-7 T-8, T-9 T-10,T-11 |
| TECHNICAL INFORMATION | |
| Standards and Specifications | T-12 |
| | |
| | 2 2 |
| | |
| | (1) (B) |
| | |
| | 118 |
| 3 V 6 / A 9 2 7 3 3 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 | 1 8 |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |

Trunnion Ball Valve Identification Key

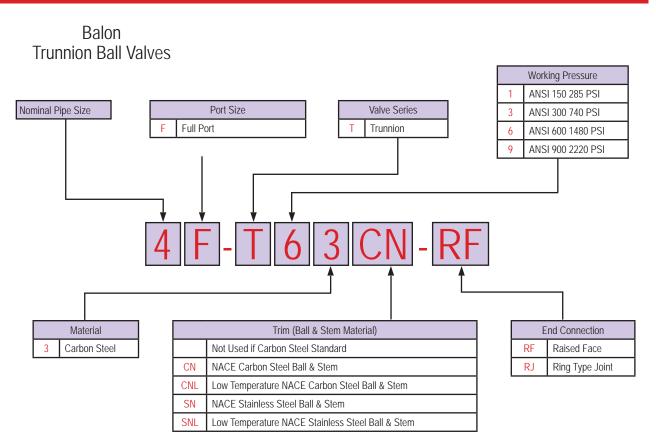

Note: For any valves not listed please consult factory.

Trunnion Valve Features

Trunnion Ball Valve Special Features





FULL-RANGE SEALING WITH MULTI-SEAL

Most trunnion-mounted ball valves have difficulty sealing at both high and low pressures. Balon's Multi-Seal seats provide multi sealing surfaces for full-range sealing. This results in steady operating torques for low pressure applications and high pressure applications. Multi-Seal is standard in every valve.

BLOWOUT-PROOF STEM WITH SAFETY SHEAR GROOVE

To prevent hazardous blowout, the Balon Series T stem is internally loaded and back-seated. And, as an added precaution each stem includes Balon's safety shear groove. If the stem should be inadvertently sheared, breakage occurs at a point located a safe distance from the pressure zone.

LOAD-BEARING BLOCKS

Balon has done away with the externally inserted lower trunnion, a hazardous leak path, a maintenance nuisance, and a blowout point. 100% AMERICAN-MADE The Balon Series T incorporates load-bearing blocks. Even at maximum pressure, the blocks bear the load uniformly and reduce lateral stress. keeping the ball centered. Balon has eliminated the premature bearing failure associated with

traditional trunnion valve designs.

DOUBLE-BLOCK-AND-BLEED AND SECONDARY SEALING

Every Balon Series T includes a bleed fitting for double-block-and-bleed, and every valve allows grease injection for secondary sealing.

LOCKING DEVICE ON EVERY VALVE

Balon Series T valves, like all Balon gear operated valves, feature standard locking devices in all sizes.

FIRE-SAFE AS STANDARD

With Balon, there is no need to ask for "fire safe." Every Balon Series T ball valve is firesafe as standard.

EMISSIONS TESTED - API 641

Balon valves successfully completed low emissions testing. Call Oklahoma City plant for details.


Like all Balon valves, the Series T comprises 100% domestic raw materials. All machining work is performed in our Oklahoma City plant by Balon employees.





Series T Carbon Steel

- **■** Gear Operated Trunnion Ball Valve
- ANSI Class 150 (285 PSI WP)
- 10" through 12"
- Bolted Body Construction
- Meets API 641Emissions Standard
- Exclusive Balon Gearbox
 - Suitable for Buried Service
 - ✓ Stainless Steel Input Shaft Standard
 - ✓ Stainless Steel Directional Indicator
 - ✓ Integral Locking Device Standard
 - ✓ Manufactured in our Oklahoma City Plant
- Multi-Seal Seats
- Fire Safe Design
- Temperature rating of -20° to 250° F

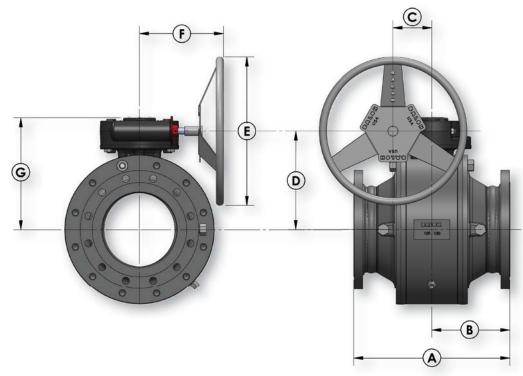


| | (| CATALOG NUMBER | | | | | | | | | | |
|----------|--|---|-------------------------------------|------|-------|-------|------|-------|----|-------|-------|-------|
| SIZE | STANDARD TRIM CARBON STEEL BALL & STEM | NACE TRIM CARBON STEEL BALL & STEM* | NACE TRIM 316 SS BALL & STEM* | PORT | A | В | С | D | E | F | G | LBS. |
| 10x10x10 | 10F-T13-RF | 10F-T13CN-RF* | 10F-T13SN-RF* | 10 | 21.00 | 10.5 | 5.25 | 13.26 | 20 | 13.56 | 15.25 | 937.5 |
| 12x12x12 | 12F-T13-RF | 12F-T13CN-RF* | 12F-T13SN-RF* | 12 | 24.00 | 12.00 | 3.04 | 18.85 | 20 | 11.85 | 20.60 | 1481 |

^{*} NACE Valves are also available in low temp at -50 to 250 F. Call factory for details.



Series T Carbon Steel

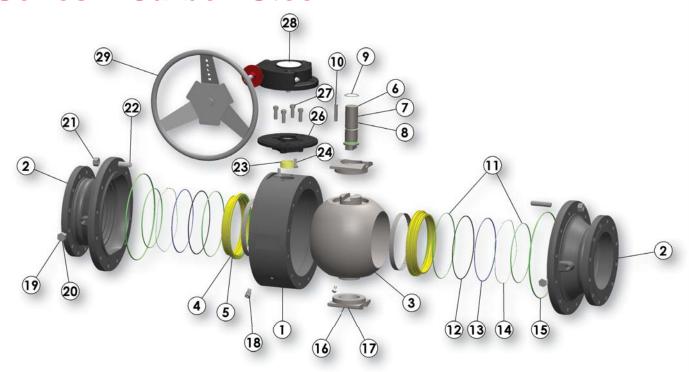

Material Description


| ITEM | PART NAME | STANDARD TRIM | CARBON STEEL NACE | STAINLESS STEEL NACE |
|------|---------------------------|--------------------------------------|--------------------------------------|----------------------|
| 1 | Body | ASTM A105 | ASTM A105 | ASTM A105 |
| 2 | Adapter | ASTM A105 | ASTM A105 | ASTM A105 |
| 3 | Ball | Carbon Steel Nickel Chrome Plated | Carbon Steel Nickel Chrome Plated | 316 Stainless Steel |
| 4 | Seat Carrier | Carbon Steel Nickel Chrome Plated | Carbon Steel Nickel Chrome Plated | 316 Stainless Steel |
| 5 | Seat Insert | Nylon/Acetal | Nylon/Acetal | Nylon/Acetal |
| 6 | Stem | Carbon Steel | Carbon Steel | 316 Stainless Steel |
| 7 | Stem O-Ring | Buna-N | Fluorocarbon | Fluorocarbon |
| 8 | Stem Thrust Washer | TFE | TFE | TFE |
| 9 | Snap Ring | Carbon Spring Steel | Carbon Spring Steel | Carbon Spring Steel |
| 10 | Stem Key | Steel Key Stock | Steel Key Stock | Steel Key Stock |
| 11 | Seat O-Ring | Buna-N | Fluorocarbon | Fluorocarbon |
| 12 | Fireseal | Graphite | Graphite | Graphite |
| 13 | Fireseal Support Ring | Stainless Steel | Stainless Steel | Stainless Steel |
| 14 | Spring | Inconel X-750 | Inconel X-750 | Inconel X-750 |
| 15 | Body O-Ring | Buna-N | Fluorocarbon | Fluorocarbon |
| 16 | Bearing Block | Carbon Steel | Carbon Steel | Stainless Steel |
| 17 | Trunnion Bearing | 316 SS/TFE | 316 SS/TFE | 316 SS/TFE |
| 18 | Bleed Fitting | 316 Stainless Steel | 316 Stainless Steel | 316 Stainless Steel |
| 19 | Sealant Injection Fitting | Alloy Steel | Alloy Steel | Alloy Steel |
| 20 | Internal Check Fitting | 316 Stainless Steel | 316 Stainless Steel | 316 Stainless Steel |
| 21 | Nuts | ASTM A194 2H | ASTM A194 2HM | ASTM A194 2HM |
| 22 | Studs | ASTM A193 B7 | ASTM A193 B7M | ASTM A193 B7M |
| 23 | Stem Bearing | Glass/TFE | Glass/TFE | Glass/TFE |
| 24 | Hexhead Capscrew | Alloy Steel | Alloy Steel | Alloy Steel |
| 25 | Lock Washer | Alloy Steel | Alloy Steel | Alloy Steel |
| 26 | Adapter Plate | Ductile Iron | Ductile Iron | Ductile Iron |
| 27 | Capscrews | Alloy Steel | Alloy Steel | Alloy Steel |
| 28 | Gear Operator | Ductile Iron | Ductile Iron | Ductile Iron |
| 29 | Handwheel | Carbon Steel | Carbon Steel | Carbon Steel |





Series T Carbon Steel

- Gear Operated Trunnion Ball Valve
- ANSI Class 300 (740 PSI WP)
- 8" Through 12"
- Bolted Body Construction
- Meets API 641 Emissions Standard
- Exclusive Balon Gearbox
 - ✓ Suitable for Buried Service
 - ✓ Stainless Steel Input Shaft Standard
 - ✓ Stainless Steel Directional Indicator
 - ✓ Integral Locking Device Standard
 - ✓ Manufactured in our Oklahoma City Plant
- Multi-Seal Seats
- Fire Safe Design
- Temperature rating of -20° to 250° F

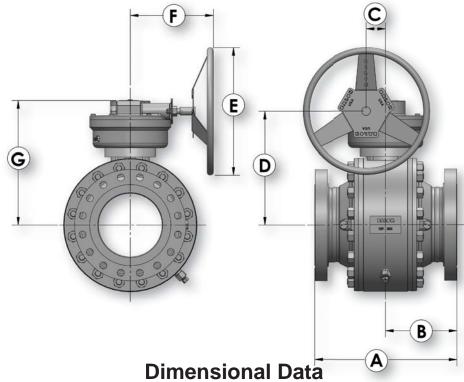


| | (| CATALOG NUMBER | | | | | | | | | | |
|----------|--|---|-------------------------------------|------|-------|-------|------|-------|----|-------|-------|------|
| SIZE | STANDARD TRIM CARBON STEEL BALL & STEM | NACE TRIM CARBON STEEL BALL & STEM* | NACE TRIM 316 SS BALL & STEM* | PORT | A | В | С | D | E | F | G | LBS. |
| 8x8x8 | 8F-T33-RF | 8F-T33CN-RF* | 8F-T33SN-RF* | 8 | 19.75 | 9.37 | 5.25 | 11.75 | 20 | 11.56 | 13.67 | 684 |
| 10x10x10 | 10F-T33-RF | 10F-T33CN-RF* | 10F-T33SN-RF* | 10 | 22.38 | 11.2 | 3.04 | 17.83 | 20 | 13.25 | 19.57 | 1200 |
| 12x12x12 | 12F-T33-RF | 12F-T33CN-RF* | 12F-T33SN-RF* | 12 | 25.50 | 12.75 | 3.04 | 18.85 | 20 | 11.85 | 20.60 | 1670 |

^{*} NACE Valves are also available in low temp at -50 to 250 F. Call factory for details.



Series T Carbon Steel

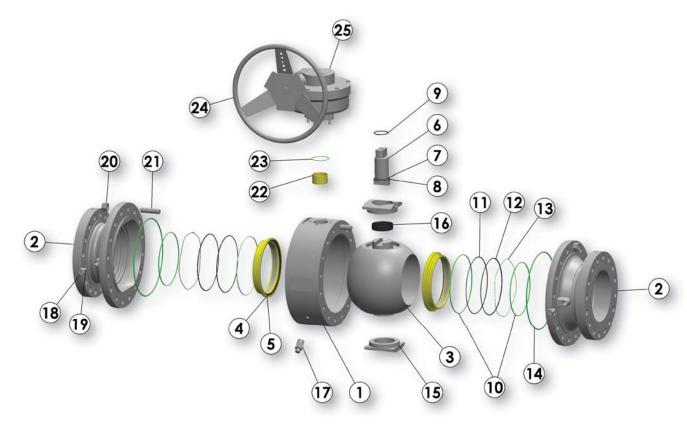

Material Description

| ITEM | PART NAME | STANDARD TRIM | CARBON STEEL NACE | STAINLESS STEEL NACE |
|------|---------------------------|-----------------------|-----------------------|-----------------------|
| 1 | Body * | ASTM A105, Normalized | ASTM A105, Normalized | ASTM A105, Normalized |
| 2 | Adapter | ASTM A105, Normalized | ASTM A105, Normalized | ASTM A105, Normalized |
| 3 | Ball | Carbon Steel | Carbon Steel | 316 Stainless Steel |
| | | Nickel Chrome Plated | Nickel Chrome Plated | |
| 4 | Seat Carrier | Carbon Steel | Carbon Steel | 316 Stainless Steel |
| | | Nickel Chrome Plated | Nickel Chrome Plated | |
| 5 | Seat Insert | Nylon/Acetal | Nylon/Acetal | Nylon/Acetal |
| 6 | Stem | Carbon Steel | Carbon Steel | 316 Stainless Steel |
| 7 | Stem O-Ring | Buna-N | Fluorocarbon | Fluorocarbon |
| 8 | Stem Thrust Washer | TFE | TFE | TFE |
| 9 | Snap Ring | Carbon Spring Steel | Carbon Spring Steel | Carbon Spring Steel |
| 10 | Seat O-Ring | Buna-N | Fluorocarbon | Fluorocarbon |
| 11 | Fireseal | Graphite | Graphite | Graphite |
| 12 | Fireseal Support Ring | Stainless Steel | Stainless Steel | Stainless Steel |
| 13 | Spring | Inconel X-750 | Inconel X-750 | Inconel X-750 |
| 14 | Body O-Ring | Buna-N | Fluorocarbon | Fluorocarbon |
| 15 | Bearing Block | Carbon Steel | Carbon Steel | Stainless Steel |
| 16 | Trunnion Bearing | 316 SS/TFE | 316 SS/TFE | 316 SS/TFE |
| 17 | Bleed Fitting | 316 Stainless Steel | 316 Stainless Steel | 316 Stainless Steel |
| 18 | Sealant Injection Fitting | Alloy Steel | Alloy Steel | Alloy Steel |
| 19 | Internal Check Fitting | 316 Stainless Steel | 316 Stainless Steel | 316 Stainless Steel |
| 20 | Nuts | ASTM A194 2H | ASTM A194 2HM | ASTM A194 2HM |
| 21 | Studs | ASTM A193 B7 | ASTM A193 B7M | ASTM A193 B7M |
| 22 | Stem Bearing | Glass/TFE | Glass/TFE | Glass/TFE |
| 23 | Gear Operator O-Ring | Buna-N | Fluorocarbon | Fluorocarbon |
| 24 | Handwheel | Carbon Steel | Carbon Steel | Carbon Steel |
| 25 | Gear Operator | Ductile Iron | Ductile Iron | Ductile Iron |


^{* 8&}quot; body is ASTM A216 WCB





Series T Carbon Steel

- Gear Operated Trunnion Ball Valve
- ANSI Class 600 (1480 PSI WP)
- 4" Through 12"
- Bolted Body Construction
- Meets API 641 Emissions Standard
- Exclusive Balon Gearbox
 - Suitable for Buried Service
 - ✓ Stainless Steel Input Shaft Standard
 - Stainless Steel Directional Indicator
 - ✓ Integral Locking Device Standard
 - Manufactured in our Oklahoma City Plant
- Multi-Seal Seats
- Fire Safe Design
- Temperature rating of -20° to 250° F

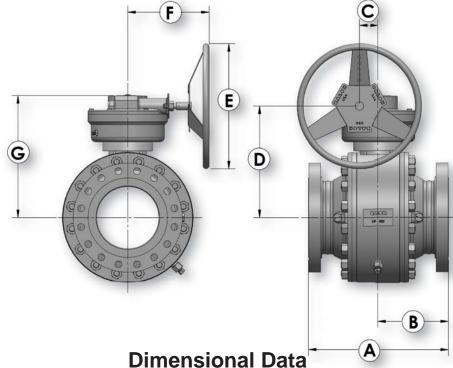


| | | | | 1131 | | " | atu | | | | | | | |
|----------|--|--|------------------------------------|------|----|-------|------|-------|------|-------|----|-------|-------|------|
| | С | ATALOG NUMBER | | | | A | | В | | | | | | |
| SIZE | STANDARD TRIM CARBON STEEL BALL & STEM | NACE TRIM CARBON STEEL BALL & STEM | NACE TRIM 316 SS BALL & STEM | PORT | RF | RTJ | RF | RTJ | С | D | E | F | G | LBS. |
| 4x4x4 | 4F-T63 | 4F-T63CN* | 4F-T63SN* | 4 | 17 | 17.12 | 9 | 8.56 | 3.04 | 8.06 | 14 | 8.75 | 9.68 | 309 |
| 6x6x6 | 6F-T63 | 6F-T63CN* | 6F-T63SN* | 6 | 22 | 22.12 | 11 | 11.06 | 4.06 | 9.69 | 20 | 11.19 | 11.31 | 560 |
| 8x8x8 | 8F-T63 | 8F-T63CN* | 8F-T63SN* | 8 | 26 | 26.12 | 13 | 13.06 | 5.25 | 11.75 | 20 | 11.56 | 13.68 | 998 |
| 10x10x10 | 10F-T63 | 10F-T63CN* | 10F-T63SN* | 10 | 31 | 31.12 | 15.5 | 15.56 | 3.04 | 17.82 | 26 | 14.00 | 19.57 | 1550 |
| 12x12x12 | 12F-T63 | 12F-T63CN* | 12F-T63SN* | 12 | 33 | 33.12 | 16.5 | 16.56 | 3.04 | 18.53 | 26 | 14.00 | 20.28 | 2320 |

^{*} NACE Valves are also available in low temp at -50 to 250 F. Call factory for details.



Series T Carbon Steel

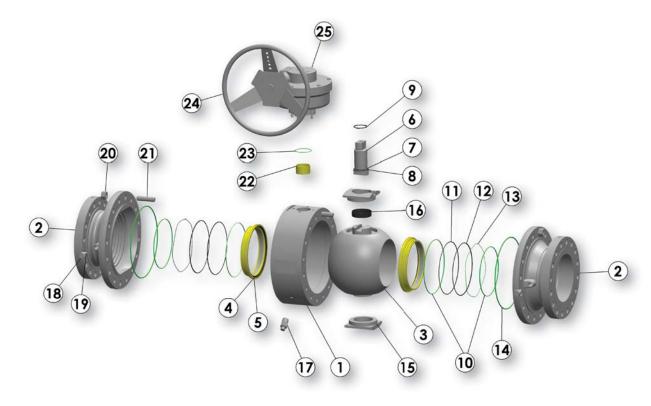

Material Description


| ITEM | PART NAME | STANDARD TRIM | CARBON STEEL NACE | STAINLESS STEEL NACE |
|------|---------------------------|-----------------------|-----------------------|-----------------------|
| 1 | Body | ASTM A105, Normalized | ASTM A105, Normalized | ASTM A105, Normalized |
| 2 | Adapter | ASTM A105, Normalized | ASTM A105, Normalized | ASTM A105, Normalized |
| 3 | Ball | Carbon Steel | Carbon Steel | 316 Stainless Steel |
| | | Nickel Chrome Plated | Nickel Chrome Plated | |
| 4 | Seat Carrier | Carbon Steel | Carbon Steel | 316 Stainless Steel |
| | | Nickel Chrome Plated | Nickel Chrome Plated | |
| 5 | Seat Insert | Nylon/Acetal | Nylon/Acetal | Nylon/Acetal |
| 6 | Stem | Carbon Steel | Carbon Steel | 316 Stainless Steel |
| 7 | Stem O-Ring | Buna-N | Fluorocarbon | Fluorocarbon |
| 8 | Stem Thrust Washer | TFE | TFE | TFE |
| 9 | Snap Ring | Carbon Spring Steel | Carbon Spring Steel | Carbon Spring Steel |
| 10 | Seat O-Ring | Buna-N | Fluorocarbon | Fluorocarbon |
| 11 | Fireseal | Graphite | Graphite | Graphite |
| 12 | Fireseal Support Ring | Stainless Steel | Stainless Steel | Stainless Steel |
| 13 | Spring | Inconel X-750 | Inconel X-750 | Inconel X-750 |
| 14 | Body O-Ring | Buna-N | Fluorocarbon | Fluorocarbon |
| 15 | Bearing Block | Carbon Steel | Carbon Steel | Stainless Steel |
| 16 | Trunnion Bearing | 316 SS/TFE | 316 SS/TFE | 316 SS/TFE |
| 17 | Bleed Fitting | 316 Stainless Steel | 316 Stainless Steel | 316 Stainless Steel |
| 18 | Sealant Injection Fitting | Alloy Steel | Alloy Steel | Alloy Steel |
| 19 | Internal Check Fitting | 316 Stainless Steel | 316 Stainless Steel | 316 Stainless Steel |
| 20 | Nuts | ASTM A194 2H | ASTM A194 2HM | ASTM A194 2HM |
| 21 | Studs | ASTM A193 B7 | ASTM A193 B7M | ASTM A193 B7M |
| 22 | Stem Bearing | Glass/TFE | Glass/TFE | Glass/TFE |
| 23 | Gear Operator O-Ring | Buna-N | Fluorocarbon | Fluorocarbon |
| 24 | Handwheel | Carbon Steel | Carbon Steel | Carbon Steel |
| 25 | Gear Operator | Ductile Iron | Ductile Iron | Ductile Iron |





Series T Carbon Steel

- Gear Operated Trunnion Ball Valve
- ANSI Class 900 (2220 PSI WP)
- **4**"
- Bolted Body Construction
- Meets API 641 Emissions Standard
- Exclusive Balon Gearbox
 - ✓ Suitable for Buried Service
 - ✓ Stainless Steel Input Shaft Standard
 - ✓ Stainless Steel Directional Indicator
 - ✓ Integral Locking Device Standard
 - ✓ Manufactured in our Oklahoma City Plant
- Multi-Seal Seats
- Fire Safe Design
- Temperature rating of -20° to 250° F

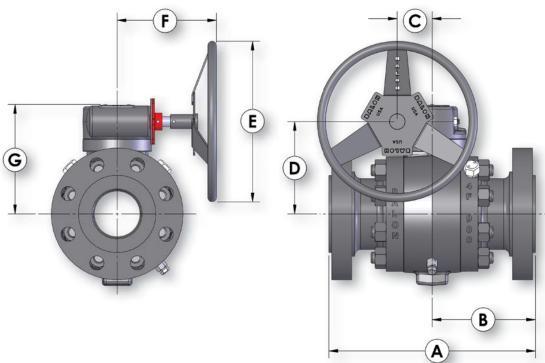


| | CA | TALOG NUMBER | | | | A | | В | | | | | | |
|-------|-------------------------------|---------------------------|---------------------|------|----|-------|----|------|------|------|----|------|------|------|
| SIZE | STANDARD TRIM CARBON STEEL | NACE TRIM CARBON STEEL | NACE TRIM 316 SS | PORT | | | | | С | D | Е | F | G | LBS. |
| | BALL & STEM | BALL & STEM | BALL & STEM | | RF | RTJ | RF | RTJ | | | | | | |
| 4x4x4 | 4F-T93 | 4F-T93CN* | 4F-T93SN* | 4 | 18 | 18.12 | 9 | 9.06 | 3.04 | 8.06 | 14 | 8.75 | 9.68 | 331 |

^{*} NACE Valves are also available in low temp at -50 to 250 F. Call factory for details.



Series T Carbon Steel

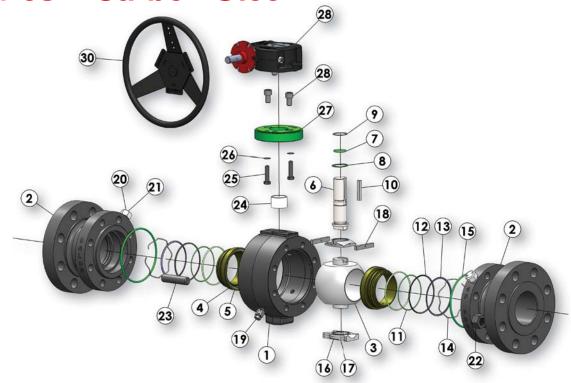

Material Description

| ITEM | PART NAME | STANDARD TRIM | CARBON STEEL NACE | STAINLESS STEEL NACE |
|------|---------------------------|--------------------------------------|--------------------------------------|----------------------------|
| 1 | Body | ASTM A105, Normalized | ASTM A105, Normalized | ASTM A105, Normalized |
| 2 | Adapter | ASTM A105, Normalized | ASTM A105, Normalized | ASTM A105, Normalized |
| 3 | Ball | Carbon Steel Nickel Chrome Plated | Carbon Steel Nickel Chrome Plated | 316 Stainless Steel |
| 4 | Seat Carrier | Carbon Steel Nickel Chrome Plated | Carbon Steel Nickel Chrome Plated | 316 Stainless Steel |
| 5 | Seat Insert | Nylon/Acetal | Nylon/Acetal | Nylon/Acetal |
| 6 | Stem | Carbon Steel | Carbon Steel | 17-4 Plate Stainless Steel |
| 7 | Stem O-Ring | Buna-N | Fluorocarbon | Fluorocarbon |
| 8 | Stem Thrust Washer | TFE | TFE | TFE |
| 9 | Snap Ring | Carbon Spring Steel | Carbon Spring Steel | Carbon Spring Steel |
| 10 | Stem Key | Steel Key Stock | Steel Key Stock | Steel Key Stock |
| 11 | Seat O-Ring | Buna-N | Fluorocarbon | Fluorocarbon |
| 12 | Fireseal | Graphite | Graphite | Graphite |
| 13 | Fireseal Support Ring | Stainless Steel | Stainless Steel | Stainless Steel |
| 14 | Spring | Inconel X-750 | Inconel X-750 | Inconel X-750 |
| 15 | Body O-Ring | Buna-N | Fluorocarbon | Fluorocarbon |
| 16 | Bearing Block | Carbon Steel | Carbon Steel | Stainless Steel |
| 17 | Trunnion Bearing | 316 SS/TFE | 316 SS/TFE | 316 SS/TFE |
| 18 | Spacer Block | Stainless Steel | Stainless Steel | Stainless Steel |
| 19 | Bleed Fitting | 316 Stainless Steel | 316 Stainless Steel | 316 Stainless Steel |
| 20 | Sealant Injection Fitting | Alloy Steel | Alloy Steel | Alloy Steel |
| 21 | Internal Check Fitting | 316 Stainless Steel | 316 Stainless Steel | 316 Stainless Steel |
| 22 | Nuts | ASTM A194 2H | ASTM A194 2HM | ASTM A194 2HM |
| 23 | Studs | ASTM A193 B7 | ASTM A193 B7M | ASTM A193 B7M |
| 24 | Stem Bearing | Glass/TFE | Glass/TFE | Glass/TFE |
| 25 | Hexhead Capscrew | Alloy Steel | Alloy Steel | Alloy Steel |
| 26 | Lock Washer | Alloy Steel | Alloy Steel | Alloy Steel |
| 27 | Adapter Plate | Ductile Iron | Ductile Iron | Ductile Iron |
| 28 | Capscrews | Alloy Steel | Alloy Steel | Alloy Steel |
| 29 | Gear Operator | Ductile Iron | Ductile Iron | Ductile Iron |
| 30 | Handwheel | Carbon Steel | Carbon Steel | Carbon Steel |



Standards and Specifications

Balon utilizes the following standards in the manufacture of ball valves. It should be noted that not all styles, configurations and materials used in Balon valves meet all of these standards in their entirety.

The user therefore, should specify a given standard if there is a need to assure total compliance with a given standard.

| API (American Petroleum Institute) | ANSI-B (B1.20.1) - Pipe Threads General |
|---|--|
| API-641 Type Testing of Quarter Turn Valves | Purpose (Inch) |
| For Fugitive Emissions | MSS (Manufacturers Standardization Society) |
| API-6FA Fire Test For Resilient-Seated Valves | MSS-SP6 Standard Finishes For Contact Faces Of |
| API 5B Inspection Of Threads | Pipe Flanges And Connection End |
| API-6D Specification for Pipeline and Piping Valves | Flanges Of Valves And Fittings |
| API-Q1 Quality Programs | MSS-SP25 Standard Marking System For Valves, Fittings, |
| API-594 Wafer Check Valves | Flanges And Fittings |
| ANSI (American National Standard Institute) | MSS-SP72 Ball Valves With Flanged Or Butt |
| ANSI-B 16.5 - Pipe Flanges And Flanged Fittings | Welding Ends For General Service |
| ANSI-B 16.10 - Face-To-Face End-To-End | NACE MR-01-75Sulfide Stress Cracking, Resistant |
| Dimensions | Metallic Material For Oil Field Equipment (NACE |
| ANSI-B 16.42 Ductile Iron Pipe Flanges And | Materials Are Optional And Must Be Specified |
| Flanged Fittings | On Purchase Orders) |
| ANSI-B 16.34 - Valves - Flanged End, | · |
| | |

CE marking to the PED available on most products

Balon valves contain grease and are not suitable for oxygen service due to an increased risk of combustion or explosion.



GEAR OPERATOR

While developing and extending Balon's product line, it became essential to design and manufacture, in house, Balon's line of gear operators. Rather than relying on commodity made gear operators manufactured by others, Balon's gear operators are specifically designed for operator safety and dependable functionality. This also eliminates ambiguity in service or inspection issues when accessing the performance of the valve and gear operator performance. It's Balon.

By incorporating rugged features and upgraded materials, the Balon gear operator extends service life and enhances both safety and ease of operation. And, as with every component of our valves, the Balon gear operator is 100% made in America by Balon Corporation.

Please consult the chart below for sizes and pressure classes on which Balon gear operators are standard.

| Balon | Gear | Operator | Models | and | Their |
|-------|------|----------|----------|-----|-------|
| | Corr | espondin | ig Valve | s * | |

| B44 ** | B64 | B88 |
|--------------|--------------|--------------|
| 4F-F63 | 6F-F13 | 8F-F13 |
| 4F-T63 | 6F-F33 | 8F-T33 |
| 6R-F63 | 6F-F63 | 8F-T63 |
| 4F-T93 | 6F-T63 | 10R-F13 |
| | 8R-F13 | 10F-T13 |
| | 8R-F33 | |
| | 8R-F63 | |
| No. of Turns | No. of Turns | No. of Turns |
| 11 | 16 | 22 |
| | | |
| B100 | B132 | B264 |
| 10F-T33 | 12F-T33 | 12F-T63 |
| 10F-T63 | | |
| 12F-T13 | | |
| No. of Turns | No. of Turns | No. of Turns |
| 25 | 33 | 66 |
| | | |
| | | |
| | | |

^{*} Gear operator models are also applicable on equivalent low-temp, high-temp, and uni-directional valves.








Gear Operator Features: B44, B64, B88 Gear Operator Features: B100, B132, B264 G-2

G-3

^{**}Balon Gear Operator Model B44 is available as an option on any Balon 3" bore or 4" bore carbon steel flanged valve. Please consult factory for details.

Gear Operator Feature B44, B64, B88

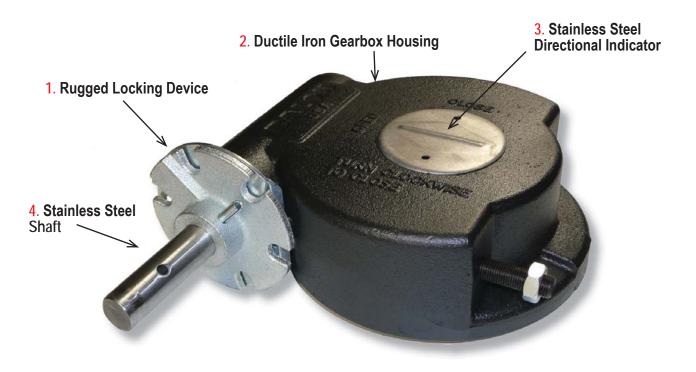



1. Rugged Locking Device Standard

A rugged locking device is standard with every Balon gearbox.


2. Ductile Iron Gearbox Housing

For all gearbox housings, Balon uses high-strength ductile iron, a more malleable material with a yield strength comparable to carbon steel.

3. Stainless Steel Directional Indicator

The Balon gearbox includes a low-profile stainless steel directional indicator. The indicator seal protects the stem journal from external contaminants.

Gear Operator Features B100, B132, B264

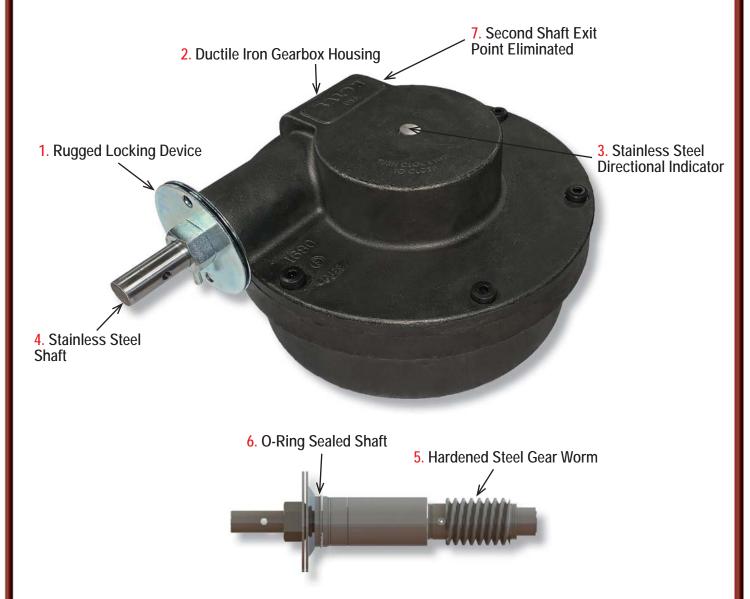

4. Stainless Steel Shaft

All Balon gear operators are equipped with stainless steel shafts as standard, thus reducing corrosion concerns and assuring smoother gearbox operation.

5. Hardened Steel Worm

Gear worms are often susceptible to galling and wear. Balon takes the additional step of hardening our steel gear worms, making them highly resistant to galling and premature failure.

6-7. Suitable for Above Ground and Buried Service

The Balon gearbox is designed to prevent water and external contaminants from invading the box and causing corrosion and operating problems. 6) The shaft is completely O-ring sealed. 7) Balon has eliminated the second shaft exit point, a common *entry* point for external contaminants in more ordinary gearboxes

12.2019.Rev.1 G-3




ACTUATION MOUNTING PACKAGE

- EASY TO INSTALL
- WEATHER PROTECTED
- PERFECT ALIGNMENT ASSURED
- INCLUDES BOLTING FOR MOST COMMON COMBINATIONS
- DESIGNED FOR INSTALLATION ON BALON VALVES (Balon Valve sold separately)





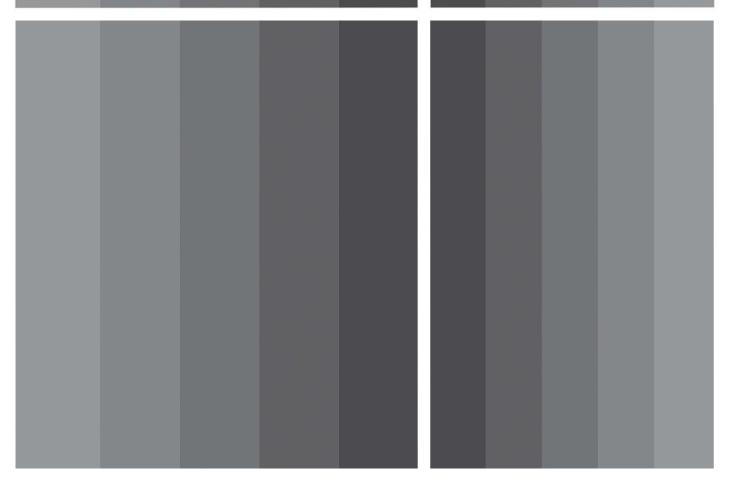

Actuation Mounting Package

Actuation torque values for Balon ball valves may be found on Balon Corporation's website at www.balon. com.

The breakaway torque values listed on our website do not contain any service or safety factors and are adequate for the operation of Balon ball valves equipped with standard seats and used to control clean liquid or gas at ambient temperature.

The run torque is approximately 50%, or one-half, of the breakaway torque. The re-seat torque is approximately 75%, or three-quarters, of the breakaway torque.

Corrosion, scale, build-up on the ball, or other service conditions can drastically alter torque requirements and should be given consideration when selecting actuation or automation equipment.







BALON ACTUATION MOUNTING PACKAGE For Lever Operated Balon Floating Ball Valves







Balon's Actuation Mounting Package includes everything required to safely and precisely mount an actuator to a floating Balon ball valve.

| BALON VALVE BORE SIZE | BOLT CIRCLES | MALE PARALLEL SQUARE DRIVER | BOLTS IMPERIAL | BOLTS METRIC | BALON'S PART# | |
|-----------------------------------|--|--------------------------------|-------------------|-----------------|------------------|------------|
| | | 0 | #10-24 X 5/8 | M5 X 16mm | 0.45.100 | |
| | | 9mm | 1/4-20 X 5/8 | M6 X 16mm | 9-1F-ISO | |
| | F03 - 1.417" D.B.C. | | #10-24 X 5/8 | M5 X 16mm | 44.45.100 | |
| 4" = " > . | F04 - 1.653" D.B.C. | 11mm | 1/4-20 X 5/8 | M6 X 16mm | 11-1F-IS0 | |
| 1" Full Port | F05 - 1.969" D.B.C. | | 1/4-20 X 3/4 | M6 X 22mm | 14.45.106 | |
| | F07 - 2.759" D.B.C. | 14mm | 5/16-18 X 7/8 | M8 X 22mm | 14-1F-ISC | |
| | | 47 | 1/4-20 X 3/4 | M6 X 22mm | 47.45.100 | |
| | | 17mm | 5/16-18 X 7/8 | M8 X 22mm | 17-1F-ISC | |
| | | 47 | 5/16-18 X 7/8 | M8 X 22mm | 47.00.100 | |
| | | 17mm | 3/8-16 X 1 | M10 X 25mm | 17-2R-ISC | |
| | | 40 | 5/16-18 X 7/8 | M8 X 22mm | 10.00.100 | |
| 2" Pegular Port F10 - 4 | F07 - 2.759" D.B.C. | 19mm | 3/8-16 X 1 | M10 X 25mm | 19-2R-ISC | |
| | F10 - 4.015" D.B.C. F12 - 4.921" D.B.C. | 00 | 5/16-18 X 7/8 | M8 X 22mm | 00.00.104 | |
| | 1 12 - 4.021 D.D.O. | 22mm | 3/8-16 X 1 | M10 X 25mm | 22-2R-ISC | |
| | | 0.7 | 3/8-16 X 1 | M10 X 25mm | 27-2R-IS0 | |
| | | 27mm | 1/2-13 X 1 | M12 X 30mm | - 27-2R-IS | |
| 5 Ca () | | 17 | 5/16-18 X 7/8 | M8 X 22mm | 47.05/00.10 | |
| | | 17mm | 3/8-16 X 1 | M10 X 25mm | 17-2F/3R-IS | |
| | | 40,,,,,, | 5/16-18 X 7/8 | M8 X 22mm | 40.05/00.10 | |
| 2" Full Port | F07 - 2.759" D.B.C. | 19mm | 3/8-16 X 1 | M10 X 25mm | 19-2F/3R-IS | |
| and 3" Regular Port | and F10 - 4.015" D.B.C F12 - 4.921" D.B.C. | 00 | 5/16-18 X 7/8 | M8 X 22mm | 00.05/00.10 | |
| o regular role | | F12 - 4.921" D.B.C | 22mm | 3/8-16 X 1 | M10 X 25mm | 22-2F/3R-I |
| | | 07 | 3/8-16 X 1 | M10 X 25mm | 07.05/00.10 | |
| | | 27mm | 1/2-13 X 1 | M12 X 30mm | 27-2F/3R-IS | |
| | | | 5/16-18 X 7/8 | M8 X 22mm | 40.0E/4D.10 | |
| | | 19mm | 3/8-16 X 1 | M10 X 25mm | 19-3F/4R-IS | |
| | F07 - 2.759" D.B.C. | 22,000 | 5/16-18 X 7/8 | M8 X 22mm | 22.25/45.19 | |
| 3" Full Port | F10 - 4.015" D.B.C. | 22mm | 3/8-16 X 1 | M10 X 25mm | 22-3F/4R-IS | |
| and | F12 - 4.921" D.B.C. | 27mm | 3/8-16 X 1 | M10 X 25mm | 27-3F/4R-IS | |
| 4" Regular Port | F14 - 5.512" D.B.C. | 2/111111 | 1/2-13 X 1 | M12 X 30mm | 27-3F/4R-13 | |
| | | 36mm | 1/2-13 X 1 | M12 X 30mm | 36-3F/4R-IS | |
| | | John | 5/8-11 X 1 1/4 | M16 X 35mm | 30-3F/4K-I | |
| 4" Full Port F10 - 4 015" D B (| | 10mm | 5/16-18 X 7/8 | M8 X 22mm | 19-4F/6R-IS | |
| | | 19mm | 3/8-16 X 1 | M10 X 25mm | 19-4F/0R-13 | |
| | F07 - 2.759" D.B.C. | 22mm | 5/16-18 X 7/8 | M8 X 22mm | 22 AEIGD 10 | |
| | F10 - 4.015" D.B.C. | 2211111 | 3/8-16 X 1 | M10 X 25mm | 22-4F/6R-IS | |
| and 6" Regular Port | F12 - 4.921" D.B.C. | 27mm | 3/8-16 X 1 | M10 X 25mm | 27 / E/SD 19 | |
| " Regular Port I | F14 - 5.512" D.B.C. | 2/111111 | 1/2-13 X 1 | M12 X 30mm | 27-4F/6R-IS | |
| | | 36mm | 1/2-13 X 1 | M12 X 30mm | 36 AEI6D IG | |
| | | 36mm | 5/8-11 X 1 1/4 | M16 X 35mm | 36-4F/6R-IS | |

Conforms to ISO 5211

Balon can accommodate most actuators with ISO or Non-ISO mounting dimensions. Please contact the factory for additional information.

BALOII. THREADED VALVE


Installation Applications:

- ✓ Sampling
- Chemical Injection
- Relief Valve Testing
- ✓ Instrumentation Attachment
- ✓ Drains, Taps, Farm Taps, etc.
- ✓ ESD/Safety Pressure Switch Verification
- ✓ Pressure Relief on Blind End Applications

BALON® TNT Valve:

- Fire Safe Design
- Ready to Install Off the Shelf
- Sizes Available 3/4", 1", 1 1/2", 2"
- 316 Stainless Steel Ball and Stem
- BALON Valve Has Bolted Construction
- Certified Low Emission Valve Per API 641
- NACE Standard and Rated -50 °F to 212 °F Service


Test and Tap_® Valve Identification Key

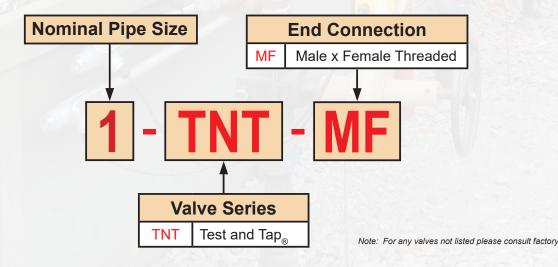

TEST AND TAP $_{\mathbb{R}}$ VALVE - Threaded Series


Material Description


| | | - | | | | | | | |
|------|---------------|-------------------------|--|--|--|--|--|--|--|
| ITEM | PART NAME | MATERIAL (NACE) | | | | | | | |
| 1 | Weather Guard | Polyethylene | | | | | | | |
| 2 | Stem Nut | Carbon Steel | | | | | | | |
| 3 | Spacer | Carbon Steel | | | | | | | |
| 4 | Lock Plate | Carbon Steel | | | | | | | |
| 5 | Handle* | Carbon Steel | | | | | | | |
| 6 | Stem Washer | Acetal | | | | | | | |
| 7 | Stop Pin | Carbon Steel | | | | | | | |
| 8 | Stem O-Ring | Fluorocarbon | | | | | | | |
| 9 | Stem Seal | TFE | | | | | | | |
| 10 | Stem | 316 Stainless Steel | | | | | | | |
| 11 | Body | ASTM A350 LF2 CL1 | | | | | | | |
| 12 | Seat | Nylon 11 (TFE Optional) | | | | | | | |
| 13 | Ball | 316 Stainless Steel | | | | | | | |
| 14 | Body O-Ring | Fluorocarbon | | | | | | | |
| 15 | End Adapter | ASTM A350 LF2 CL1 | | | | | | | |
| 16 | Body Bolts | ASTM A320 L7M | | | | | | | |
| 17 | NPT Pipe Plug | Carbon Steel | | | | | | | |

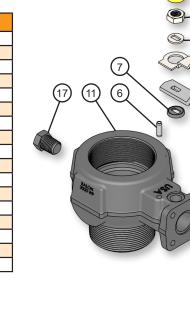

Dimensional Data

| SIZE | CATALOG NUMBER | PORT | WP | Α | В | С | D | E | F | G | Н | 1 | LBS |
|------|----------------|------|-------|------|------|------|------|------|------|------|------|------|------|
| 0.75 | 3/4-TNT-MF | 0.75 | 3,000 | 3.00 | 2.50 | 1.54 | 2.21 | 3.50 | 3.50 | 0.87 | 1.88 | 1.75 | 3.50 |
| 1 | 1-TNT-MF | 0.91 | 3,000 | 3.00 | 2.50 | 1.54 | 2.21 | 3.50 | 3.50 | 0.87 | 1.88 | 1.75 | 3.50 |
| 1.5 | 1.5-TNT-MF | 1.38 | 3,000 | 3.60 | 3.26 | 1.97 | 2.60 | 3.50 | 3.90 | 0.87 | 1.88 | 1.75 | 4.75 |
| 2 | 2-TNT-MF | 1.88 | 3,000 | 3.40 | 3.68 | 2.20 | 2.68 | 3.50 | 4.00 | 0.87 | 1.88 | 1.75 | 5.00 |



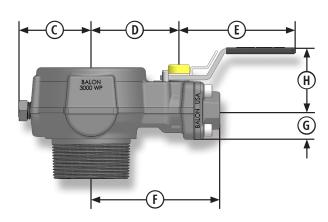



14

^{*} Handle and lock device are standard.

BALON® TNT FLANGED VALVE


Installation Applications:

- ✓ Pressure Relief on Blind End Applications
- ✓ ESD/Safety Pressure Switch Verification
- ✓ Drains, Taps, Farm Taps, etc.
- ✓ Instrumentation Attachment
- ✓ Relief Valve Testing
- ✓ Chemical Injection
- ✓ Sampling

BALON® TNT Valve:

- Fire Safe Design
- Ready to Install Off the Shelf
- Sizes Available 2" Through 12"
- 316 Stainless Steel Ball and Stem
- BALON Valve Has Bolted Construction
- Certified Low Emission Valve Per API 641
- Single Size Fits 150/300/600 ANSI Class Flanges
- NACE Standard and Rated -50 °F to 212 °F Service
- Replaces Separate Bleed Ring, Nipple and Valve Commonly Used


Test and Tap_® Valve Identification Key

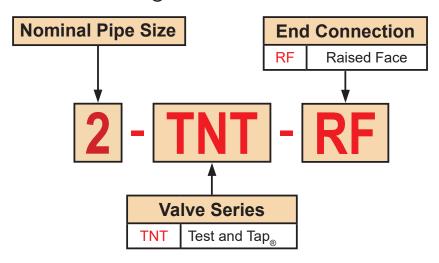





TEST AND TAP $_{\mathbb{R}}$ **VALVE - Flanged Series**

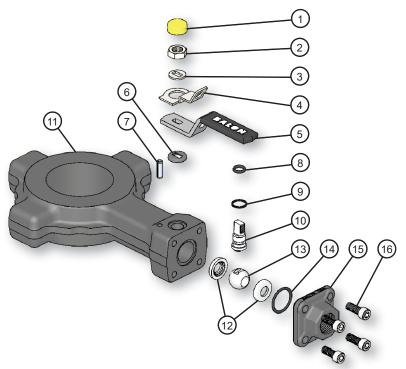



Material Description

| ITEM | PART NAME | MATERIAL (NACE) |
|------|---------------|-------------------------|
| 1 | Weather Guard | Polyethylene |
| 2 | Stem Nut | Carbon Steel |
| 3 | Spacer | Carbon Steel |
| 4 | Lock Plate | Carbon Steel |
| 5 | Handle* | Carbon Steel |
| 6 | Stem Washer | Acetal |
| 7 | Stop Pin | Carbon Steel |
| 8 | Stem O-Ring | Fluorocarbon |
| 9 | Stem Seal | TFE |
| 10 | Stem | 316 Stainless Steel |
| 11 | Body | ASTM A350 LF2 CL1 |
| 12 | Seat | Nylon 11 (TFE Optional) |
| 13 | Ball | 316 Stainless Steel |
| 14 | Body O-Ring | Fluorocarbon |
| 15 | End Adapter | ASTM A350 LF2 CL1 |
| 16 | Body Bolts | ASTM A320 L7M |

^{*} Handle and lock device are standard. Additional ports available on request.

| SIZE | CATALOG NUMBER | BORE | ANSI CLASS | A | В | С | D | Е | F | Н | J | NPT | VALVE WP | LBS |
|------|----------------|-------|---------------|-----|------|------|------|------|------|------|------|------|-------------|-----|
| 2 | 2-TNT-RF | 2.25 | 150/300/600 | 1.5 | 5.6 | 2.8 | 4.6 | 3.53 | 8.7 | 1.7 | 1.8 | 1/2" | 3000 | 6.9 |
| 3 | 3-TNT-RF | 3.38 | 150/300/600 | 1.5 | 6.9 | 3.45 | 5.5 | 3.53 | 10.2 | 1.7 | 1.8 | 1/2" | 3000 | 8.9 |
| 4 | 4-TNT-RF | 4.38 | 150/300/600 | 1.5 | 8.5 | 4.25 | 6.7 | 3.53 | 12.2 | 1.7 | 1.8 | 1/2" | 3000 | 12 |
| 6 | 6-TNT-RF | 6.38 | 150/300/600 | 1.5 | 12.1 | 6.05 | 9.18 | 4.87 | 17.9 | 2.56 | 2.62 | 1" | 3000 | 21 |
| 8 | 8-TNT-RF | 8.38 | 150/300/600 | 1.5 | 14.2 | 7.1 | 10.2 | 4.87 | 19.3 | 2.56 | 2.62 | 1" | 3000 | 27 |
| 10 | 10-TNT-RF | 10.38 | 150/300/600 | 1.5 | 17.6 | 8.8 | 12.5 | 4.87 | 23.4 | 2.56 | 2.62 | 1" | 3000 | 35 |
| 12 | 12-TNT-RF | 12.38 | 150/300/600 | 1.5 | 19.8 | 9.9 | 13.6 | 4.87 | 25.7 | 2.56 | 2.62 | 1" | 3000 | 40 |

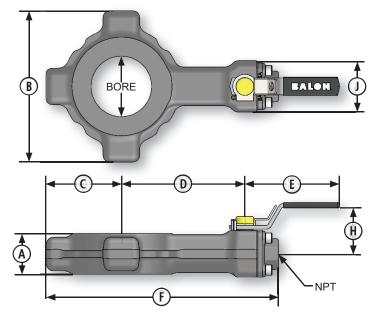





FREEZE RESISTANT UNI-DIRECTIONAL OPTION



** FOR UNI-DIRECTIONAL SERVICE ONLY ***

THIS VALVE HAS BEEN MODIFIED FOR SPECIAL SERVICE CONDITIONS AND MUST BE SERVICE CONDITIONS AND MUST BE MATCHES THE DIRECTION SHOWN BY THE ARROW STAMPED ON THE END OF THE STEM.

Raising the Intrebold of Quality Raising the Intrebold of Quality Cost of Ownership

UNI-Directional Valve

UNI-Directional Modification for Freeze Resistance

While no design can prevent a valve from freezing, Balon offers a UNI-Directional option that reduces the likelihood of a temporary freeze resulting in permanent damage to the valve. This design modification incorporates a relief hole in the upstream side of the closed ball. When water trapped inside the ball cavity freezes and expands, the relief hole allows dissipation of the increased internal pressure.

As shown in the photographs, the addition of the relief hole renders the valve uni-directional with the body side of the valve positioned upstream for proper sealing and operation on the downstream seat. The UNI-Directional option is also an effective way to reduce the possibilty of pressure build-up due to thermal expansion. Balon's freeze-resistant, UNI-Directional option is available on every floating ball valve Balon offers. Please call the factory for pricing and availability when requesting the freeze resistant, UNI-Directional option.

Relief Hole, Upstream When Valve Is Closed




SWING CHECK VALVES





SWING CHECK VALVES

| BALON SWING CHECK VALVES | C-1 |
|---|----------------------|
| CHECK VALVE IDENTIFICATION KEY Balon Check Valve Features | C-2 C-3 |
| SERIES D CHECK VALVES | |
| CARBON STEEL VALVES Female x Female Threaded End Connection Carbon Steel, To 2500 PSI WP, Threaded End (1" Through 2") | C-4 |
| DUCTILE IRON VALVES Female x Female Threaded End Connection Ductile Iron, To 2000 PSI WP, Threaded End (1" Through 4") Grooved x Grooved End Connection Ductile Iron, 750 PSI WP, Grooved End (2" Through 4") | C-5 C-6 |
| NICKEL ALUMINUM BRONZE VALVES Female x Female Threaded End Connection Aluminum Bronze, To 2000 PSI WP, Threaded End (1" Through 4") Grooved x Grooved End Connection Aluminum Bronze, To 1000 PSI WP, Grooved End (2" Through 4") | C-7 C-8 |
| SERIES C CHECK VALVES | |
| NICKEL ALUMINUM BRONZE VALVES Female x Female Threaded End Connection Aluminum Bronze, 3000 PSI WP, Threaded End (2") Aluminum Bronze, 750 PSI WP, Threaded End (2" Through 3") | C-9 C-10 |
| DUCTILE IRON VALVES Female x Female Threaded End Connection Ductile Iron, To 750 PSI WP, Threaded End (2" Through 3") Ductile Iron, To 1000 PSI WP, Threaded End (2") Ductile Iron, 2000 PSI WP, Threaded End (2" Through 3") | C-11 C-11 C-12 |
| CARBON STEEL VALVES Female x Female Threaded End Connection Carbon Steel, To 3000 PSI WP, Threaded End (1") Grooved x Grooved End Connection | C-13 |
| Carbon Steel, To 1000 PSI WP, Grooved End (2" Through 3") Female x Female Threaded End Connection Carbon Steel, 3000 PSI WP, Threaded End (2") | C-13 C-14 |
| Wafer Check | |
| Wafer ANSI 150, 300, 600; To 1480 PSI WP Thin Pattern (2" Through 6") Wafer ANSI 150, 300, 600; To 1480 PSI WP Long Pattern (2" Through 6") | C-15 C-16 |
| Flanged End Connection Carbon Steel, Flanged End, ANSI 150, 285 PSI WP (2" Through 6") Carbon Steel, Flanged End, ANSI 300, 740 PSI WP (2" Through 6") Carbon Steel, Flanged End, ANSI 600, 1480 PSI WP (2" Through 6") | C-17 C-18 C-19 |

Check Valve Identification Key

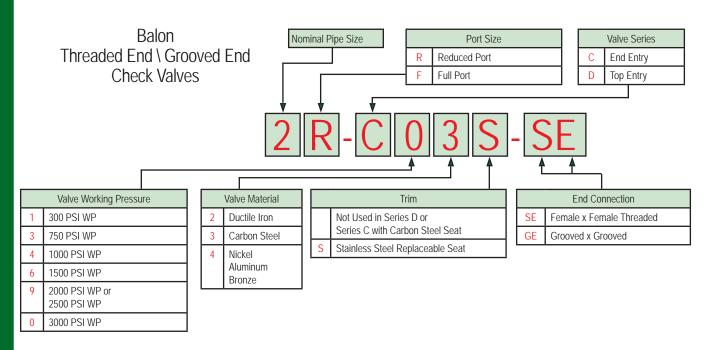

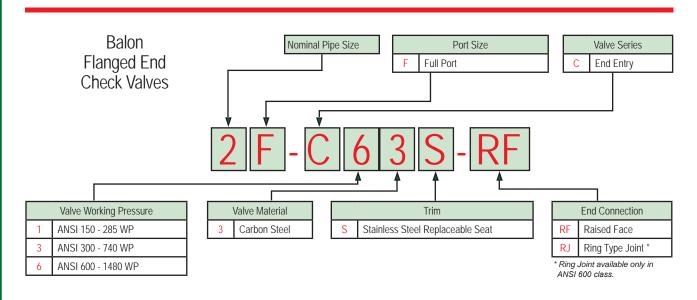

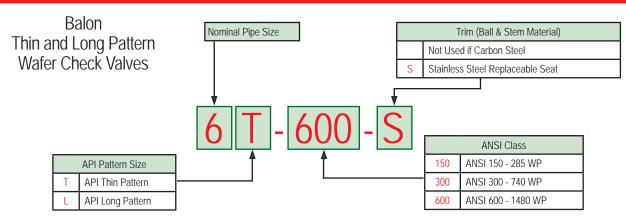

Note: For any valves not listed please consult factory.

Check Valve Features

Series D Check Valves


The Balon Series D is a top-entry check valve which is available in carbon steel, ductile iron and "9D" nickel aluminum bronze.

All series D are full port to allow for uninterrupted flow through the valve. As is the case with all of Balon's other check valves, all series D meet NACE and include 316 stainless steel discs as standard components.

All Series D feature a specially designed, patented hingeworks consisting of a hinge pin and bearing block. As with the disc, the hinge and bearing block are also made of stainless steel. This special hinge-works supports the disc and encases the hinge in a stainless steel bearing that is fixed in place to prevent the hinge from rubbing against the dissimilar metal of the valve body.

In competitive check valves, this rubbing of dissimilar metals causes erosion and wear and can greatly shorten the useful life of the valve.

Balon's exclusive, patented hinge-works is yet another example of how Balon solves problems by raising the threshold of quality and lowering the cost of ownership.

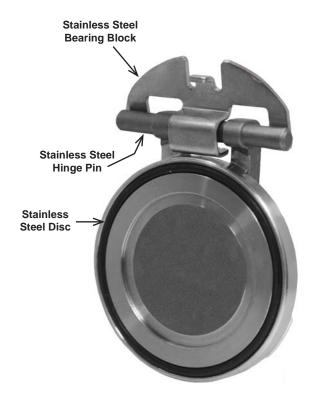


Series C Check Valves

Balon has breathed new life into the check valve by providing a fresh approach that conquers common swing check valve problems of the past.

Check valves often are subjected to damaging service requiring periodic replacement of internal components. Yet the design of most check valves prevents replacement of one of the most important components in a check valve; the seat, which can lead to premature valve failure.

Balon's Series C Check Valves solve this problem by using an innovative cartridge assembly that affords the user an economical and easy way to replace the entire checking mechanism (the disc, seal and seat) in the field, thereby extending the life of the valve.

- 1. Notice the Seat...it is an integral part of the replaceable module and not cast into the body as in other check valves.
- **2. Notice the Resilient Seal**...it is firmly anchored into the seat rather than the disc, protecting it from the destructive abrading and blasting effect of the flow.
- **3. Notice the Disc...**it has an integral pivot pin. No problem with wear prone pins and bushings. A positive solution to early mechanical failure.
- **4. Notice the Pivot Bearing...**it is part of the seat module and not the valve body. It is a replaceable part, allowing complete valve renewal.

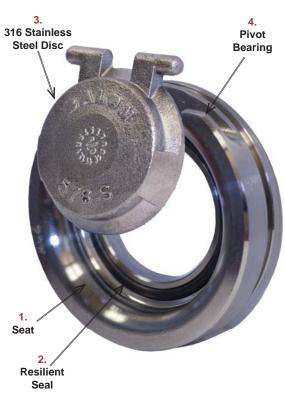

NOTE:

Use of swing check valves in reciprocating compressor service can substantially reduce service life.





Series D Carbon Steel


- Top Entry Swing Check Valve
- To 2500 PSI WP
- 1" Through 2"
- Threaded Body Construction


- Patented Hinge-Works for Extended Life
- Stainless Steel Disc Standard
- Improved by Design for Easier Bonnet Removal
- NACE Standard

Material Description

| PART NAME | DESCRIPTION |
|-------------|--|
| Body | ASTM A216 WCB/A105, Normalized |
| Bonnet | ASTM A216 WCB/A105, Normalized |
| Bonnet Seal | Fluorocarbon (Buna-N Optional) |
| Disc | Replaceable 316 Stainless Steel |
| Disc Hanger | Stainless Steel |
| Disc Seal | Fluorocarbon |
| Pipe Plug | Carbon Steel |
| | Body Bonnet Bonnet Seal Disc Disc Hanger Disc Seal |

^{*} Not available in 1"

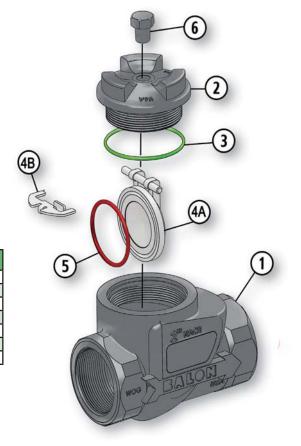



| SIZE | CATALOG | PORT | WP | А | В | С | LBS. |
|------|-----------|------|------|------|------|------|------|
| 1 | 1F-D63-SE | 1 | 1500 | 4.25 | 2.87 | 1.12 | 4.5 |
| 1 | 1F-D93-SE | 1 | 2500 | 4.25 | 2.87 | 1.12 | 4.5 |
| 2 | 2F-D63-SE | 2 | 1500 | 6 | 3.75 | 1.81 | 12 |
| 2 | 2F-D93-SE | 2 | 2500 | 6 | 3.75 | 1.81 | 12 |



Series D Ductile Iron

- **■** Top Entry Swing Check Valve
- To 2000 PSI WP
- 1" Through 4"
- **■** Threaded Body Construction






- High Grade Annealed Ductile Iron for Better Corrosion Resistance and Greater Yield Strength
- Patented Hinge-Works for Extended Life
- Stainless Steel Disc Standard
- Improved by Design for Easier Bonnet Removal
- NACE Standard

Material Description

| ITEM | PART NAME | DESCRIPTION |
|------|-------------|---|
| 1 | Body | ASTM A395 Class 60-40-18 Fully Annealed |
| 2 | Bonnet | ASTM A395 Class 60-40-18 Fully Annealed |
| 3 | Bonnet Seal | Fluorocarbon (Buna-N Optional) |
| 4A | Disc | Replaceable 316 Stainless Steel |
| 4B | Disc Hanger | Stainless Steel |
| 5 | Disc Seal | Fluorocarbon |
| 6* | Pipe Plug | Carbon Steel |

^{*} Not available in 1"

| SIZE | CATALOG | PORT | WP | Α | В | С | LBS. |
|------|-----------|------|------|------|------|------|------|
| 1 | 1F-D42-SE | 1 | 1000 | 4.25 | 2.87 | 1.12 | 4 |
| 1 | 1F-D92-SE | 1 | 2000 | 4.25 | 2.87 | 1.12 | 4 |
| 2 | 2F-D12-SE | 2 | 300 | 6 | 3.75 | 1.81 | 10 |
| 2 | 2F-D32-SE | 2 | 750 | 6 | 3.75 | 1.81 | 10 |
| 2 | 2F-D42-SE | 2 | 1000 | 6 | 3.75 | 1.81 | 10 |
| 2 | 2F-D62-SE | 2 | 1500 | 6 | 3.75 | 1.87 | 11 |
| 2 | 2F-D92-SE | 2 | 2000 | 6 | 3.75 | 1.87 | 11 |
| 3 | 3F-D32-SE | 3 | 750 | 8 | 4.45 | 2.43 | 21 |
| 4 | 4F-D32-SE | 4 | 750 | 10 | 5.54 | 3.00 | 36 |

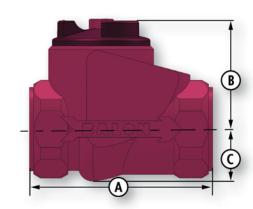




Grooved End Connection



Series D Ductile Iron


- Top Entry Swing Check Valve
- **750 PSI WP**
- 2" to 4"
- Threaded Body Construction

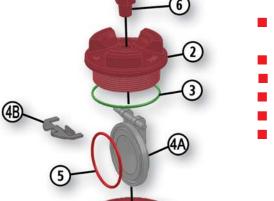

- High Grade Annealed Ductile Iron for Better Corrosion Resistance and Greater Yield Strength
- Patented Hinge-Works for Extended Life
- Stainless Steel Disc Standard
- Fully Machined Grooves
- Improved by Design for Easier Bonnet Removal
- NACE Standard



| ITEM | PART NAME | DESCRIPTION |
|------|-------------|---|
| 1 | Body | ASTM A395 Class 60-40-18 Fully Annealed |
| 2 | Bonnet | ASTM A395 Class 60-40-18 Fully Annealed |
| 3 | Bonnet Seal | Fluorocarbon |
| 4A | Disc | Replaceable 316 Stainless Steel |
| 4B | Disc Hanger | Stainless Steel |
| 5 | Disc Seal | Fluorocarbon |
| 6 | Pipe Plug | Carbon Steel |

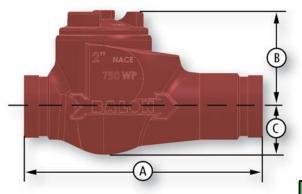


| SIZE | CATALOG | PORT | WP | А | В | С | LBS. |
|------|-----------|------|-----|-------|------|------|------|
| 2 | 2F-D32-GE | 2 | 750 | 9 | 3.58 | 1.82 | 10 |
| 3 | 3F-D32-GE | 3 | 750 | 10.75 | 4.50 | 2.45 | 20 |
| 4 | 4F-D32-GE | 4 | 750 | 12 | 5.54 | 2.95 | 36 |



Series D "9D" Nickel Aluminum Bronze

- ASTM B148 GR 955 "9D"
- Top Entry Swing Check Valve
- To 2000 PSI WP
- 1" to 4"
- Threaded Body Construction



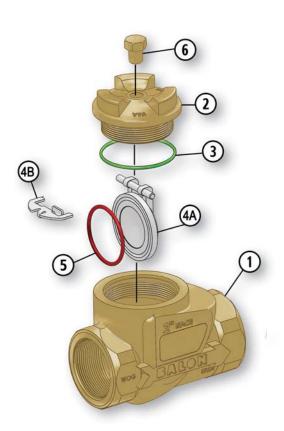


- Enhanced Protection Against CO₂ and Saltwater Corrosion
- Replaceable Disc
- NACE Standard
- 316 Stainless Steel Disc Standard
- Exceptional Yield Strength
- Improved by Design for Easier Bonnet Removal
- Minimizes Risk of Galling Associated with Stainless Steel

Material Description

| ITEM | PART NAME | DESCRIPTION |
|------|-------------|---------------------------------|
| 1 | Body | ASTM B148 GR 955 |
| 2 | Bonnet | ASTM B148 GR 955 |
| 3 | Bonnet Seal | Fluorocarbon |
| 4A | Disc | Replaceable 316 Stainless Steel |
| 4B | Disc Hanger | Stainless Steel |
| 5 | Disc Seal | Fluorocarbon |
| 6* | Pipe Plug | 316 Stainless Steel |

^{*} Not available in 1"

| SIZE | CATALOG | PORT | WP | А | В | С | LBS. |
|------|-----------|------|------|------|------|------|------|
| 1 | 1F-D94-SE | 1 | 2000 | 4.25 | 2.87 | 1.12 | 4 |
| 2 | 2F-D44-SE | 2 | 1000 | 6 | 3.75 | 1.87 | 9.8 |
| 2 | 2F-D94-SE | 2 | 2000 | 6 | 3.75 | 1.87 | 11 |
| 3 | 3F-D44-SE | 3 | 1000 | 8 | 4.45 | 2.43 | 21 |
| 4 | 4F-D44-SE | 4 | 1000 | 10 | 5.54 | 3.00 | 36 |






Grooved End Connection




Series D "9D" Nickel Aluminum Bronze

- ASTM B148 GR 955 "9D"
- Top Entry Swing Check Valve
- 1000 PSI WP
- 2" to 6"
- Threaded Body Construction
- Enhanced Protection Against CO₂ and Saltwater Corrosion
- Replaceable Disc
- NACE Standard
- 316 Stainless Steel Disc Standard
- Exceptional Yield Strength
- Improved by Design for Easier Bonnet Removal

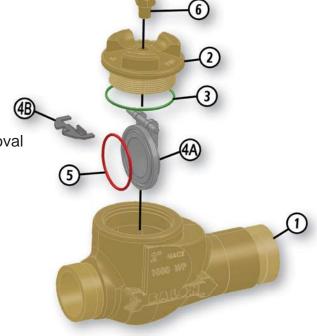

Material Description

| ITEM | PART NAME | DESCRIPTION |
|------|-------------|---------------------------------|
| 1 | Body | ASTM B148 GR 955 |
| 2 | Bonnet | ASTM B148 GR 955 |
| 3 | Bonnet Seal | Fluorocarbon |
| 4A | Disc | Replaceable 316 Stainless Steel |
| 4B | Disc Hanger | Stainless Steel |
| 5 | Disc Seal | Fluorocarbon |
| 6 | Pipe Plug | 316 Stainless Steel |

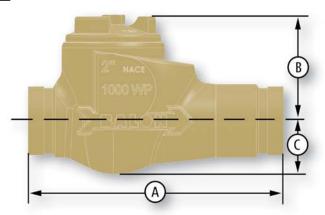

| SIZE | CATALOG | PORT | WP | А | В | С | LBS. |
|------|-----------|------|------|-------|------|------|------|
| 2 | 2F-D44-GE | 2 | 1000 | 9 | 3.58 | 1.82 | 9.75 |
| 3 | 3F-D44-GE | 3 | 1000 | 10.75 | 4.50 | 2.45 | 21 |
| 4 | 4F-D44-GE | 4 | 1000 | 12 | 5.54 | 2.95 | 36 |
| 6 | 6R-D44-GE | 4 | 1000 | 12 | 5.54 | 2.95 | 38.6 |




Series C "9D" Nickel Aluminum Bronze

- ASTM B148 GR 955 "9D"
- Swing Check Valve
- 3000 PSI WP
- **2**"


■ Bolted Body Construction

- Enhanced Protection Against CO₂ and Saltwater Corrosion
- Replaceable Seat Disc Cartridge
- Seal Located in Seat, Thus Protected From Flow
- NACE Standard
- 316 Stainless Steel Disc Standard
- Exceptional Yield Strength
- Minimizes Risk of Galling Associated with Stainless Steel



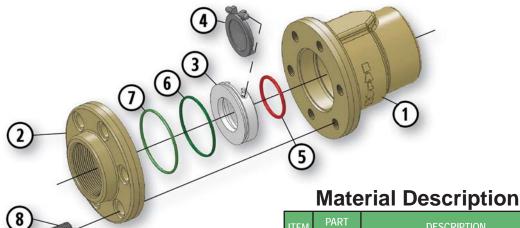

| ITEM | PART NAME | DESCRIPTION |
|------|--------------|---------------------------------|
| 1 | Body | ASTM B148 GR 955 |
| 2 | Adapter | ASTM B148 GR 955 |
| 3 | Seat | Replaceable 316 Stainless Steel |
| 4 | Disc | Replaceable 316 Stainless Steel |
| 5 | 0-Ring | Seat Seal: Fluorocarbon |
| 6 | 0-Ring | Assembly Seal: Fluorocarbon |
| 7 | 0-Ring | Body Seal: Fluorocarbon |
| 8 | Bolts | ASTM A193 B7M |



| SIZE | CATALOG | PORT | D | L | LBS. |
|------|------------|------|------|------|------|
| 2 | 2R-C04S-SE | 1.5 | 4.88 | 5.37 | 10.9 |




Series C "9D" Nickel Aluminum Bronze


- ASTM B148 GR 955 "9D"
- **■** Swing Check Valve
- **750 PSI WP**
- 2" Through 3"
- One Piece Body
- Enhanced Protection Against CO₂ and Saltwater Corrosion
- Replaceable Seat Disc Cartridge
- Seal Located in Seat, Thus Protected From Flow
- NACE Standard
- 316 Stainless Steel Disc Standard
- Exceptional Yield Strength
- Minimizes Risk of Galling Associated with Stainless Steel



Material Description

| ITEM | PART NAME | DESCRIPTION |
|------|-----------|---------------------------------|
| 1 | Body | ASTM B148 GR 955 |
| 2 | Seat | Replaceable Carbon Steel |
| 3 | Disc | Replaceable 316 Stainless Steel |
| 4 | O-Ring | Seat Seal: Fluorocarbon |
| 5 | O-Ring | Body Seal: Fluorocarbon |
| 6 | Retaining | 316 Stainless Steel |
| | Ring | |

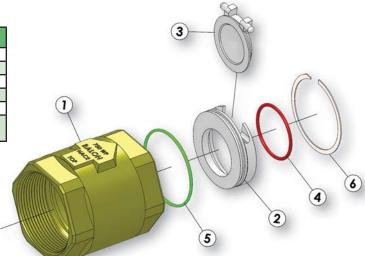



| SIZE | CATALOG | PORT | D | L | LBS. |
|------|------------|------|------|------|------|
| 2 | 2R-C34S-SE | 1.25 | 3 | 3.62 | 3.3 |
| 3 | 3R-C34S-SE | 2 | 4.25 | 4.50 | 7.3 |






Material Description

| ITEM | PART NAME | DESCRIPTION | | | | |
|------|----------------|---|--|--|--|--|
| 1 | Body | ASTM A395 Class 60-40-18 Fully Annealed | | | | |
| 2 | Seat | Replaceable Carbon Steel | | | | |
| 3 | Disc | Replaceable 316 Stainless Steel | | | | |
| 4 | O-Ring | Seat Seal: Fluorocarbon | | | | |
| 5 | O-Ring | Body Seal: Buna-N | | | | |
| 6 | Retaining Ring | 316 Stainless Steel | | | | |



- Swing Check Valve
- **750 PSI WP**
- 2" Through 3"

One Piece Body

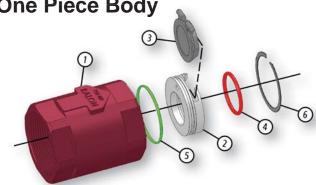

Dimensional Data

| SIZE | CATALOG | PORT | D | L | LBS. |
|------|-----------|------|------|------|------|
| 2 | 2R-C32-SE | 1.25 | 3 | 3.62 | 3.3 |
| 3 | 3R-C32-SE | 2 | 4.25 | 4.50 | 7.3 |

- High Grade Annealed Ductile Iron for Better Corrosion Resistance and Greater Yield Strength
- Replaceable Seat Disc Cartridge
- Stainless Steel Disc Standard
- Swing Check Valve
- 1000 PSI WP
- 2"
- Threaded Body Construction

1


- Seal Located in Seat. Thus Protected From Flow
- NACE Standard





| (4)— | |
|---|--------|
| ITEM PART CARBON STEEL STAINLESS STEEL NAME SEAT SEAT SEAT | |
| (2) (7) ASTM A395 Class 60-40-18 Fully Annealed ASTM A395 Class 60-40-18 Fully An | nealed |
| 2 Adapter ASTM A395 Class 60-40-18 Fully Annealed ASTM A395 Class 60-40-18 Fully An | nealed |
| 3 Seat Replaceable Carbon Steel Replaceable 316 Stainless Steel | |
| 4 Disc Replaceable 316 Stainless Steel Replaceable 316 Stainless Steel | |
| 5 O-Ring Seat Seal: Fluorocarbon Seat Seal: Fluorocarbon | |
| 6 O-Ring Assembly Seal: Buna-N Assembly Seal: Fluorocarbon | |
| 7 O-Ring Body Seal: Buna-N Body Seal: Fluorocarbon | |

| | CATALOG NUMBER | | | | | | | |
|------|----------------------|-------------------------|------|------|------|------|--|--|
| SIZE | CARBON STEEL SEAT | STAINLESS STEEL SEAT | PORT | D | L | LBS. | | |
| 2 | 2R-C42-SE | 2R-C42S-SE | 1.5 | 3.37 | 5.37 | 6 | | |






Series C Ductile Iron


- **■** Swing Check Valve
- 2000 PSI WP
- 2" Through 3"
- Bolted Body Construction
- Bolted Body Protects Against End Adapter Blowout
- High Grade Annealed Ductile Iron for Better Corrosion Resistance and Greater Yield Strength
- Replaceable Seat Disc Cartridge
- Seal Located in Seat, Thus Protected From Flow



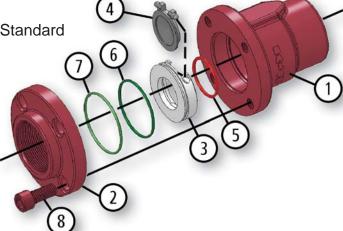

Material Description

| ITEM | PART NAME | CARBON STEEL SEAT | STAINLESS STEEL SEAT |
|------|--------------|---|---|
| 1 | Body | ASTM A395 Class 60-40-18 Fully Annealed | ASTM A395 Class 60-40-18 Fully Annealed |
| 2 | Adapter | ASTM A395 Class 60-40-18 Fully Annealed | ASTM A395 Class 60-40-18 Fully Annealed |
| 3 | Seat | Replaceable AISI 1018 Carbon Steel | Replaceable 316 Stainless Steel |
| 4 | Disc | Replaceable 316 Stainless Steel | Replaceable 316 Stainless Steel |
| 5 | 0-Ring | Seat Seal: Fluorocarbon | Seat Seal: Fluorocarbon |
| 6 | 0-Ring | Assembly Seal: Buna-N | Assembly Seal: Fluorocarbon |
| 7 | O-Ring | Body Seal: Buna-N | Body Seal: Fluorocarbon |
| 8 | Bolts | ASTM A193 B7M | ASTM A193 B7M |



| SIZE | CATALOG NUMBER | | | | | |
|------|----------------------|-------------------------|------|------|------|------|
| | CARBON STEEL SEAT | STAINLESS STEEL SEAT | PORT | D | L | LBS. |
| 2 | 2R-C92-SE | 2R-C92S-SE | 1.5 | 4.87 | 5.50 | 10 |
| 3 | 3R-C92-SE | 3R-C92S-SE | 2 | 6.75 | 7.25 | 24.3 |



Threaded \ Grooved End





Series C Carbon Steel

- Swing Check Valve
- To 3000 PSI WP
- 1"
- **■** Threaded Body Construction

Material Description

| ITEM | PART NAME | CARBON STEEL SEAT | STAINLESS STEEL SEAT |
|------|--------------|---------------------------------|---------------------------------|
| 1 | Body | ASTM A105, Normalized | ASTM A105, Normalized |
| 2 | Adapter | ASTM A105, Normalized | ASTM A105, Normalized |
| 3 | Seat | Replaceable Carbon Steel | Replaceable 316 Stainless Steel |
| 4 | Disc | Replaceable 316 Stainless Steel | Replaceable 316 Stainless Steel |
| 5 | 0-Ring | Seat Seal: Fluorocarbon | Seat Seal: Fluorocarbon |
| 6 | O-Ring | Assembly Seal: Buna-N | Assembly Seal: Fluorocarbon |
| 7 | O-Rina | Body Seal: Buna-N | Body Seal: Fluorocarbon |


Dimensional Data

| | CATALOG | | | | | | |
|------|----------------------|-------------------------|------|------|------|------|------|
| SIZE | CARBON STEEL SEAT | STAINLESS STEEL SEAT | PORT | WP | D | L | LBS. |
| 1 | 1F-C63-SE | 1F-C63S-SE | 1 | 1500 | 2.75 | 4.25 | 4.2 |
| 1 | 1F-C03-SE | 1F-C03S-SE | 1 | 3000 | 2.75 | 4.25 | 4.2 |


D RAION HOUSE TO SERVICE TO SERVI

- Replaceable Seat Disc Cartridge
- Seal Located in Seat, Thus Protected From Flow
- NACE Standard
- 316 Stainless Steel Disc Standard

- **■** Swing Check Valve
- 1000 PSI WP
- 2" Through 3"
- Threaded Body Construction

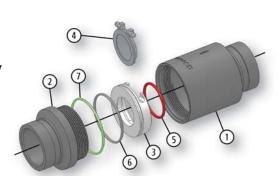






| | CATALOG | | | | | |
|------|----------------------|-------------------------|------|------|------|------|
| SIZE | CARBON STEEL SEAT | STAINLESS STEEL SEAT | PORT | D | | LBS. |
| 2 | 2R-C43-GE | 2R-C43S-GE | 1.5 | 3.12 | 5.87 | 5.3 |
| 3 | 3R-C43-GE | 3R-C43S-GE | 2 | 4 | 6.50 | 9.8 |



Series C Carbon Steel


- Swing Check Valve
- 3000 PSI WP
- **2**"
- Bolted Body Construction
- Bolted Body Protects Against End Adapter Blowout
- Replaceable Seat Disc Cartridge
- Seal Located in Seat, Thus Protected From Flow
- NACE Standard
- 316 Stainless Steel Disc Standard



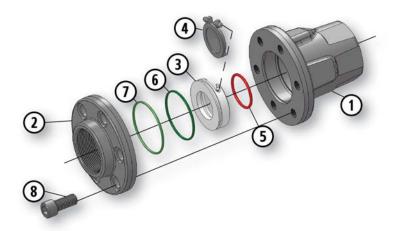

Material Description

| ITEM | PART NAME | CARBON STEEL SEAT | STAINLESS STEEL SEAT | | |
|------|-------------------------------|---------------------------------|---------------------------------|--|--|
| 1 | Body | ASTM A105, Normalized | ASTM A105, Normalized | | |
| 2 | Adapter ASTM A105, Normalized | | ASTM A105, Normalized | | |
| 3 | Seat Replaceable Carbon Steel | | Replaceable 316 Stainless Steel | | |
| 4 | Disc | Replaceable 316 Stainless Steel | Replaceable 316 Stainless Steel | | |
| 5 | 0-Ring | Seat Seal: Fluorocarbon | Seat Seal: Fluorocarbon | | |
| 6 | 0-Ring | Assembly Seal: Buna-N | Assembly Seal: Fluorocarbon | | |
| 7 | O-Ring Body Seal: Buna-N | | Body Seal: Fluorocarbon | | |
| 8 | Bolts | ASTM A193 B7M | ASTM A193 B7M | | |
| | | | | | |



| | CATALOG | | | | | |
|---------------------------|-----------|-------------------------|------|------|------|------|
| SIZE CARBON STEEL SEAT | | STAINLESS STEEL SEAT | PORT | D | | LBS. |
| 2 | 2R-C03-SE | 2R-C03S-SE | 1.5 | 4.87 | 5.37 | 11.7 |



Wafer Check Valves





Wafer Check Valves Carbon Steel

- Thin Pattern Swing Check Valve
- ANSI 150 (285 PSI WP)
- ANSI 300 (740 PSI WP)
- ANSI 600 (1480 PSI WP)
- 2" Through 6"
- **■** Forged Steel Body Construction
- Replaceable Seat Disc Cartridge
- Seal Located in Seat, Thus Protected From Flow
- NACE Standard
- 316 Stainless Steel Disc Standard
- Generally Larger Port Sizes Than Other Brands

Material Description

| ITEM | PART NAME | CARBON STEEL SEAT | STAINLESS STEEL SEAT |
|------|--------------|------------------------------------|---|
| 1 | Body | ASTM A105, Normalized | ASTM A105, Normalized |
| 2 | Seat | Replaceable Carbon Steel | Replaceable 316 Or 17-PH Stainless Steel |
| 3 | Disc | Replaceable 316 Stainless Steel | Replaceable 316 Stainless Steel |
| 4 | 0-Ring | Seat Seal: Fluorocarbon | Seat Seal: Fluorocarbon |
| 5 | 0-Ring | Assembly Seal: Buna-N | Assembly Seal: Fluorocarbon |
| 6 | Retainer | Stainless Steel | Stainless Steel |
| 7 | Set Screw | Stainless Steel | Stainless Steel |

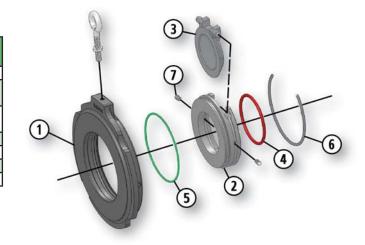



| | CATALOG NUMBER | | | | | STUD | |
|------|----------------------|-------------------------|------|-------|------|--------|------|
| SIZE | CARBON STEEL SEAT | STAINLESS STEEL SEAT | PORT | D | T | LENGTH | LBS. |
| 2 | 2T-150 | 2T-150S | 1.25 | 4.12 | .75 | 4.25 | 2.5 |
| 2 | 2T-300 | 2T-300S | 1.25 | 4.37 | .75 | 4.50 | 2.5 |
| 2 | 2T-600 | 2T-600S | 1.25 | 4.37 | .75 | 5.25 | 2.5 |
| 3 | 3T-150 | 3T-150S | 2 | 5.37 | .75 | 4.50 | 4.4 |
| 3 | 3T-300 | 3T-300S | 2 | 5.87 | .75 | 5.25 | 4.4 |
| 3 | 3T-600 | 3T-600S | 2 | 5.87 | .75 | 6 | 4.4 |
| 4 | 4T-150 | 4T-150S | 2.81 | 6.87 | .75 | 4.50 | 7 |
| 4 | 4T-300 | 4T-300S | 2.81 | 7.12 | .75 | 5.50 | 6.95 |
| 4 | 4T-600 | 4T-600S | 2.62 | 7.62 | .87 | 7 | 8.5 |
| 6 | 6T-150 | 6T-150S | 4.50 | 8.75 | .87 | 5 | 13.5 |
| 6 | 6T-300 | 6T-300S | 4.50 | 9.87 | .87 | 5.75 | 13.6 |
| 6 | 6T-600 | 6T-600S | 4 | 10.50 | 1.12 | 8 | 19 |



Wafer Check Valves


Wafer Check Valves Carbon Steel

- Long Pattern Swing Check Valve
- ANSI 150 (285 PSI WP)
- ANSI 300 (740 PSI WP)
- ANSI 600 (1480 PSI WP)
- 2" Through 6"
- **■** Forged Steel Body Construction
- Replaceable Seat Disc Cartridge
- Seal Located in Seat, Thus Protected From Flow
- NACE Standard
- 316 Stainless Steel Disc Standard
- Generally Larger Port Sizes
 Than Other Brands




Material Description

| ITEM | PART NAME | CARBON STEEL SEAT | STAINLESS STEEL SEAT |
|------|--------------|---------------------------|-----------------------------|
| 1 | Body | ASTM A105, Normalized | ASTM A105, Normalized |
| 2 | Seat | Replaceable Carbon Steel | Replaceable 316 Or |
| | | | 17-PH Stainless Steel |
| 3 | Disc | Replaceable 316 Stainless | Replaceable 316 Stainless |
| | | Steel | Steel |
| 4 | O-Ring | Seat Seal: Fluorocarbon | Seat Seal: Fluorocarbon |
| 5 | 0-Ring | Assembly Seal: Buna-N | Assembly Seal: Fluorocarbon |
| 6 | Retainer | Stainless Steel | Stainless Steel |
| 7 | Set | Stainless Steel | Stainless Steel |
| | Screw | | |

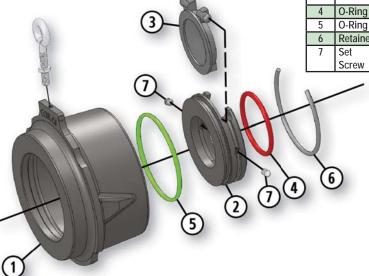



| | CATALOG | NUMBER | | | | STUD | LBS. |
|------|----------------------|-------------------------|------|-------|------|--------|------|
| SIZE | CARBON STEEL SEAT | STAINLESS STEEL SEAT | PORT | D | L | LENGTH | |
| 2 | 2L-150 | 2L-150S | 1.50 | 4.12 | 2.37 | 5.75 | 4.9 |
| 2 | 2L-300 | 2L-300S | 1.5 | 4.37 | 2.37 | 6.25 | 4.9 |
| 2 | 2L-600 | 2L-600S | 1.5 | 4.37 | 2.37 | 6.75 | 4.9 |
| 3 | 3L-150 | 3L-150S | 2 | 5.37 | 2.87 | 6.50 | 11.8 |
| 3 | 3L-300 | 3L-300S | 2 | 5.87 | 2.87 | 7.25 | 11.8 |
| 3 | 3L-600 | 3L-600S | 2 | 5.87 | 2.87 | 8 | 11.8 |
| 4 | 4L-150 | 4L-150S | 3 | 6.87 | 2.87 | 6.50 | 15 |
| 4 | 4L-300 | 4L-300S | 3 | 7.12 | 2.87 | 7.75 | 15 |
| 4 | 4L-600 | 4L-600S | 3 | 7.87 | 3.12 | 9.25 | 16 |
| 6 | 6L-150 | 6L-150S | 4.75 | 8.75 | 3.87 | 8 | 34 |
| 6 | 6L-300 | 6L-300S | 4.75 | 9.87 | 3.87 | 9 | 34.8 |
| 6 | 6L-600 | 6L-600S | 4.75 | 10.50 | 5.37 | 12.50 | 48 |






Flanged End Connection




Series C Carbon Steel

- Swing Check Valve
- ANSI Class 150 (285 PSI WP)
- 2" Through 6"
- Bolted Body Construction
- Replaceable Seat Disc Cartridge
- Seal Located in Seat, Thus Protected From Flow
- NACE Standard
- Stainless Steel Disc and Seat Standard

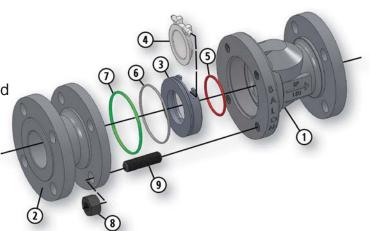

Material Description

| | | _ |
|------|------------|---------------------------------|
| ITEM | PART NAME | DESCRIPTION |
| 1 | Body | ASTM A216 WCB/A105, Normalized |
| 2 | Adapter | ASTM A216 WCB/A105, Normalized |
| 3 | Seat | Replaceable 316 Stainless Steel |
| 4 | Disc | Replaceable 316 Stainless Steel |
| 5 | O-Ring | Seat Seal: Fluorocarbon |
| 6 | O-Ring | Assembly Seal: Fluorocarbon |
| 7 | O-Ring | Body Seal: Fluorocarbon |
| 8 | Nuts | ASTM A194 2HM |
| 9 | Body Bolts | ASTM A193 B7M |



| SIZE | CATALOG | PORT | D | L | LBS. |
|------|------------|------|-------|------|------|
| 2 | 2F-C13S-RF | 2 | 6 | 8 | 27 |
| 3 | 3F-C13S-RF | 3 | 7.50 | 9.5 | 48 |
| 4 | 4F-C13S-RF | 4 | 9 | 11.5 | 74 |
| 6 | 6F-C13S-RF | 6 | 12.75 | 14 | 162 |




Flanged End Connection


Series C Carbon Steel

- Swing Check Valve
- ANSI Class 300 (740 PSI WP)
- 2" Through 6"
- Bolted Body Construction



- Replaceable Seat Disc Cartridge
- Seal Located in Seat, Thus Protected From Flow
- NACE Standard
- Stainless Steel Disc and Seat Standard

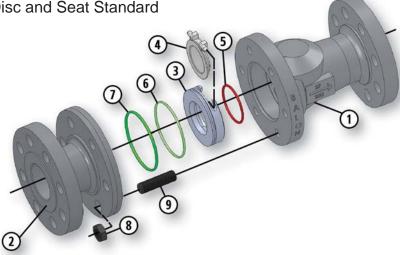

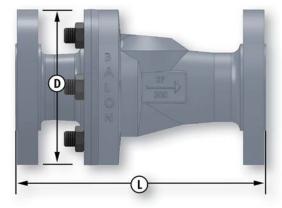

Material Description

| ITEM | PART NAME | DESCRIPTION |
|------|------------|---------------------------------|
| 1 | Body | ASTM A216 WCB/A105, Normalized |
| 2 | Adapter | ASTM A216 WCB/A105, Normalized |
| 3 | Seat | Replaceable 316 Stainless Steel |
| 4 | Disc | Replaceable 316 Stainless Steel |
| 5 | O-Ring | Seat Seal: Fluorocarbon |
| 6 | O-Ring | Assembly Seal: Fluorocarbon |
| 7 | O-Ring | Body Seal: Fluorocarbon |
| 8 | Nuts | ASTM A194 2HM |
| 9 | Body Bolts | ASTM A193 B7M |

| SIZE | CATALOG | PORT | D | L | LBS. |
|------|------------|------|-------|------|------|
| 2 | 2F-C33S-RF | 2 | 6.50 | 10.5 | 37 |
| 3 | 3F-C33S-RF | 3 | 8 | 12.5 | 74 |
| 4 | 4F-C33S-RF | 4 | 9.37 | 14 | 111 |
| 6 | 6F-C33S-RF | 6 | 13.25 | 17.5 | 268 |




Flanged End Connection




Series C Carbon Steel

- Swing Check Valve
- ANSI Class 600 (1480 PSI WP)
- 2" Through 6"
- **■** Bolted Body Construction
- Replaceable Seat Disc Cartridge
- Seal Located in Seat, Thus Protected From Flow
- NACE Standard
- Stainless Steel Disc and Seat Standard

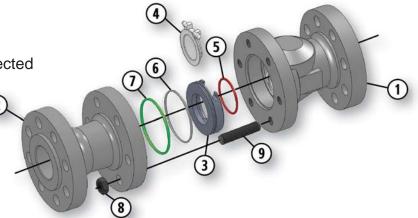

Material Description

| ITEM | PART NAME | DESCRIPTION |
|------|------------|---------------------------------|
| 1 | Body | ASTM A216 WCB/A105, Normalized |
| 2 | Adapter | ASTM A216 WCB/A105, Normalized |
| 3 | Seat | Replaceable 316 Stainless Steel |
| 4 | Disc | Replaceable 316 Stainless Steel |
| 5 | O-Ring | Seat Seal: Fluorocarbon |
| 6 | O-Ring | Assembly Seal: Fluorocarbon |
| 7 | O-Ring | Body Seal: Fluorocarbon |
| 8 | Nuts | ASTM A194 2HM |
| 9 | Body Bolts | ASTM A193 B7M |



| SIZE | CATALOG | | PORT | D | L | | LBS. |
|------|-------------|------------|------|-------|------|-------|------|
| SIZE | RAISED FACE | RING JOINT | PURI | D D | RF | RJ | LB3. |
| 2 | 2F-C63S-RF | 2F-C63S-RJ | 2 | 6.50 | 11.5 | 11.62 | 42 |
| 3 | 3F-C63S-RF | 3F-C63S-RJ | 3 | 8 | 14 | 14.12 | 80 |
| 4 | 4F-C63S-RF | 4F-C63S-RJ | 4 | 10.75 | 17 | 17.12 | 188 |
| 6 | 6F-C63S-RF | 6F-C63S-RJ | 6 | 13.75 | 22 | 22.12 | 384 |



Needle Valves






N - NEEDLE

NEEDLE VALVES

| ALON NEEDLE VALVES NEEDLE VALVE IDENTIFICATION KEY | N-1 N-2 |
|--|------------|
| Balon Needle Valve Features | N-3 |
| CARBON STEEL NEEDLE VALVES 6,000 PSI WP Resilient Seated | |
| Male x Female (1/4" and 1/2") | N-4 |
| Female x Female (1/4" and 1/2") | N-4 |
| Male x 90° Angle Female (½" x ¼") | N-4 |
| 10,000 PSI WP Metal Seated | |
| Male x Female ($\frac{1}{4}$ " and $\frac{1}{2}$ ") | N-5 |
| Female x Female (½") | N-5 |
| 316 STAINLESS STEEL SEATED NEEDLE VALVES 6,000 PSI WP Resilient Seated | |
| Male x Female (1/4" and 1/2") | N-6 |
| Female x Female (½") | N-6 |
| 10,000 PSI WP Metal Seated | |
| Male x Female ($\frac{1}{4}$ " and $\frac{1}{2}$ ") | N-7 |
| Female x Female (½") | N-7 |

Needle Valve Identification Key


Balon Carbon Steel \ Stainless Steel Needle Valves

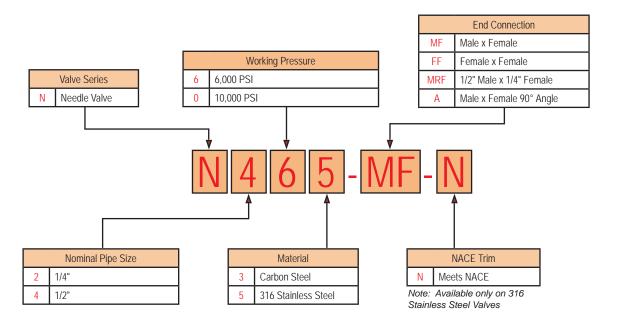

Note: For any valves not listed please consult factory.

Needle Valve Features

Balon: The Benchmark for Needle Valves

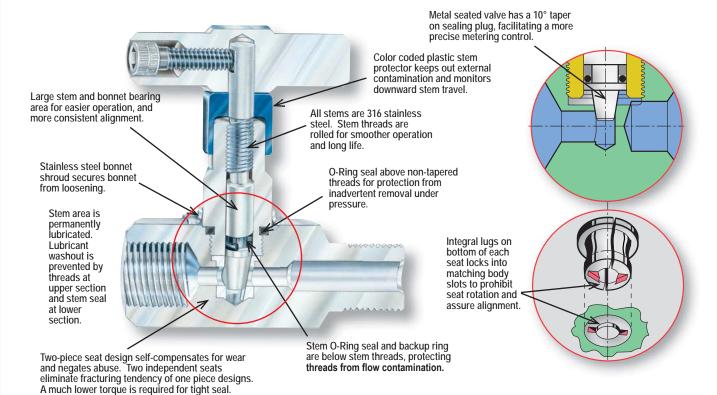

INTEGRATED STEM AND BONNET DESIGN

The stem and bonnet assembly presents a number of balanced features integrated in such a way as to provide a general improvement in stem operation, service life, and overall safety.

All stems are 316 stainless steel for almost universal corrosion resistance and therefore much longer life.

Stem threads are located above the stem sealing area so that they are protected against contamination from the flow, again contributing to smoother operation and longer life. The thread area is lubricated at the factory, and the stem seal prevents washout of the lubricant, making for a permanently lubricated valve.

The stem threads are rolled for smoother operation and longer life. Note also that the stem and bonnet bearing area is larger than normally encountered. This makes for more precise stem alignment and gives a "superb quality feel" of operation, and it enhances overall seal ability.

An O-ring provides the primary stem sealing with a back-up ring providing lower friction, longer seal life, and a permanently adjusted stem seal arrangement. The color coded plastic stem protector keeps external contamination out of the thread area.

Thick cross sectional area limits and cushions downward handle movement, thus helping to prevent overtightening of stem.

The stainless steel bonnet shroud fits over the hex wrench flats of the bonnet and secures it into position to impede loosening by vibration or other undetected causes.

The bonnet also contains an O-ring seal above the threads. Because these threads are not tapered, forcible removal of the bonnet would

result in early blow-out of the O-ring and immediate leakage, warning against further removal of the bonnet. Conventional designs with tapered threads and no O-ring would not give warning of an impending blowout.

No other needle valve on the market today provides such a complete and rational approach to solving existing operational and safety concerns.

ADVANCE SEALING CONCEPT

Balon's exclusive seat design is a split two-piece design consisting of two counter positioned conical sections. This arrangement provides independent bidirectional sealing. On closing, downward movement of sealing plug transmits force radially. Each seat section "floats" laterally, slightly promoting self-compensation for wear, as well as resistance to distortion, scoring, binding and permanent set, all common maladies of needle valves in general. Since each seat section responds to the cleaving effect of the sealing plug, bubble tight sealing occurs early, with less stem torque required than in other designs.

The split seat configuration preempts seat fracturing, a common cause of valve leakage. Two seats acting separately but also in concert, offer higher integrity sealing and extended service life.

Integral lugs on bottom of each seat section lock into matching recesses in the valve body. Seat rotation is denied. Alignment is assured and consistently maintained.

The Balon concept is not merely an answer to needle valve sealing problems, it constitutes a continued effort to, "raise the threshold of quality and lower the cost of ownership".










- 316 Stainless Steel Stem Standard
- Non-Rotating Seats
- Bonnet Locking Shroud
- **■** Precise Metering
- Split Seat Design
- Maximum Temp 200°

Material Description

| ITEM | PART NAME | CARBON STEEL VALVE |
|------|--------------------------|----------------------------------|
| 1 | Body (MxF) (90 °) | A216 WCB (Investment Casting) |
| 2 | Body (FxF) | 1215 CRS |
| 3 | Body (MxF) | AISI 1018 |
| 4 | Handle | 12L14 CRS |
| 5 | Handle Bolt | SHCS Zinc Plated |
| 6 | Bonnet Cover | Polypropylene |
| 7 | Bonnet | 12L14 CRS |
| 8 | Bonnet O-Ring | Buna-N |
| 9 | Stem | 316 Stainless Steel |
| 10 | Stem Back-up Ring | Buna-N |
| 11 | Stem O-Ring | Buna-N |
| 12 | Resilient Seat (2 Piece) | Acetal |
| 13 | Bonnet Locking Shroud | 304 Stainless Steel |







| SIZE | CATALOG NUMBER CARBON STEEL | SEAT | DIAGRAM | Α | В | С | D | E | F | G | LBS. |
|---------|-----------------------------|-----------|---------|------|------|------|------|------|------|------|------|
| .25 | N263-MF | Resilient | Α | 1.25 | 3.87 | 3.25 | 1.37 | 2.62 | .219 | N/A | 1.5 |
| .25 | N263-FF | Resilient | В | 1.25 | 3.87 | 2.75 | 1.37 | 2.62 | .219 | N/A | 1.5 |
| .50 | N463-MF | Resilient | Α | 1.25 | 3.87 | 3.37 | 1.37 | 2.62 | .219 | N/A | 1.5 |
| .50x.25 | N463-MRF | Resilient | Α | 1.25 | 3.87 | 3.37 | 1.37 | 2.62 | .219 | N/A | 1.5 |
| .50 | N463-FF | Resilient | В | 1.25 | 3.87 | 2.75 | 1.37 | 2.62 | .219 | N/A | 1.5 |
| .50 | N463-A | Resilient | C | 1.25 | 4.87 | 2.12 | 1.37 | 2.62 | .219 | 2.25 | 1.5 |




10000 PSI / Metal Seated

- 316 Stainless Steel Stem Standard
- Bonnet Locking Shroud
- **■** Precise Metering
- Maximum Temp 200°






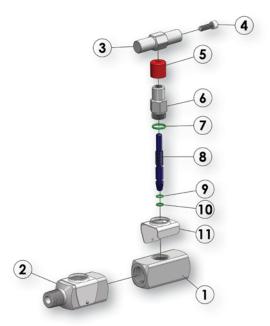

Material Description

| ITEM | PART NAME | CARBON STEEL VALVE |
|------|-----------------------|-----------------------|
| 1 | Body (FxF) | 1215 CRS |
| 2 | Body (MxF) | AISI 1018 |
| 3 | Handle | 12L14 CRS |
| 4 | Handle Bolt | SHCS Zinc Plated |
| 5 | Bonnet Cover | Polypropylene |
| 6 | Bonnet | 12L14 CRS |
| 7 | Bonnet O-Ring | Buna-N |
| 8 | Stem | 316 Stainless Steel |
| 9 | Stem Back-up Ring | Buna-N |
| 10 | Stem O-Ring | Buna-N |
| 11 | Bonnet Locking Shroud | 304 Stainless Steel |

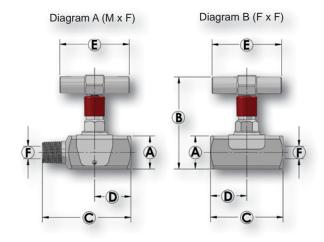

| SIZE | CATALOG NUMBER CARBON STEEL | SEAT | DIAGRAM | А | В | С | D | Е | F | LBS. |
|------|--------------------------------|-------|---------|------|------|------|------|------|------|------|
| .25 | N203-MF | Metal | Α | 1.25 | 3.87 | 3.25 | 1.37 | 2.62 | .219 | 1.5 |
| .50 | N403-MF | Metal | А | 1.25 | 3.87 | 3.37 | 1.37 | 2.62 | .219 | 1.5 |
| .50 | N403-FF | Metal | В | 1.25 | 3.87 | 2.75 | 1.37 | 2.62 | .219 | 1.5 |







6000 PSI / Resilient Seated

- Non-Rotating Seats
- **■** Bonnet Locking Shroud
- **■** Precise Metering
- Split Seat Design
- Maximum Temp 200°

Material Description

| ITEM | PART NAME | STAINLESS STEEL |
|------|--------------------------|----------------------------|
| 1 | Body (FxF) | 316 Stainless Steel |
| 2 | Body (MxF) | 316 Stainless Steel |
| 3 | Handle | 303 Stainless Steel |
| 4 | Handle Bolt | 18-8 Stainless Steel |
| 5 | Bonnet Cover | Polypropylene |
| 6 | Bonnet | 316 Stainless Steel |
| 7 | Bonnet O-Ring | Buna-N (NACE Fluorocarbon) |
| 8 | Stem | 316 Stainless Steel |
| 9 | Stem Back-up Ring | Buna-N (NACE Fluorocarbon) |
| 10 | Stem O-Ring | Buna-N (NACE Fluorocarbon) |
| 11 | Resilient Seat (2 Piece) | Acetal |
| 12 | Bonnet Locking Shroud | 304 Stainless Steel |
| 13 | Handle Cover | Polypropylene |

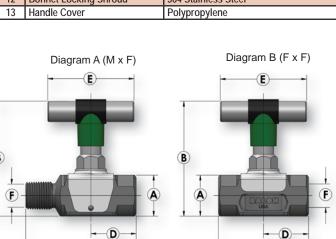

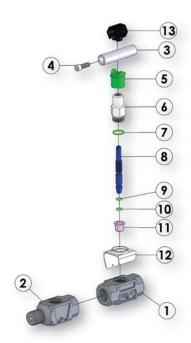

| CIZE | CATALOG NUMBER | | CEAT DIACE | DIACDAM | | | _ | _ | _ | _ | LDC |
|------|-----------------|----------|------------|---------|------|------|------|------|------|------|------|
| SIZE | STAINLESS STEEL | NACE | SEAT | DIAGRAM | А | В | C | ט | E | F | LBS. |
| .25 | N265-MF | N265-MFN | Resilient | Α | 1.25 | 3.87 | 3.25 | 1.37 | 2.62 | .219 | 1.5 |
| .50 | N465-MF | N465-MFN | Resilient | Α | 1.25 | 3.87 | 3.37 | 1.37 | 2.62 | .219 | 1.5 |
| .50 | N465-FF | N465-FFN | Resilient | В | 1.25 | 3.87 | 2.75 | 1.37 | 2.62 | .219 | 1.5 |



10000 PSI / Metal Seated


- Bonnet Locking Shroud
- **■** Precise Metering
- Maximum Temp 200°






Material Description

| ITEM | PART NAME | STAINLESS STEEL |
|------|-----------------------|----------------------------|
| 1 | Body (FxF) | 316 Stainless Steel |
| 2 | Body (MxF) | 316 Stainless Steel |
| 3 | Handle | 303 Stainless Steel |
| 4 | Handle Bolt | 18-8 Stainless Steel |
| 5 | Bonnet Cover | Polypropylene |
| 6 | Bonnet | 316 Stainless Steel |
| 7 | Bonnet O-Ring | Buna-N (NACE Fluorocarbon) |
| 8 | Stem | 316 Stainless Steel |
| 9 | Stem Back-up Ring | Buna-N (NACE Fluorocarbon) |
| 10 | Stem O-Ring | Buna-N (NACE Fluorocarbon) |
| 11 | Bonnet Locking Shroud | 304 Stainless Steel |
| 12 | Handle Cover | Polypropylene |

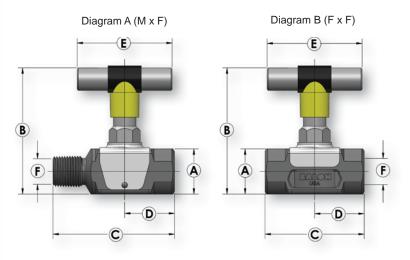

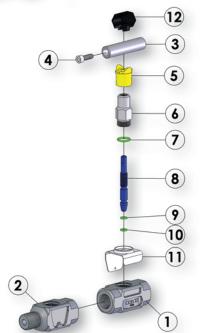

| CIZE | CATALOG NUMBER | | CEAT | DIACDAM | | | | | _ | - | LDC |
|------|-----------------|----------|-------|---------|------|------|------|------|------|------|------|
| SIZE | STAINLESS STEEL | NACE | SEAT | DIAGRAM | А | В | C | ע | E | | LBS. |
| .25 | N205-MF | N205-MFN | Metal | Α | 1.25 | 3.87 | 3.25 | 1.37 | 2.62 | .219 | 1.5 |
| .50 | N405-MF | N405-MFN | Metal | А | 1.25 | 3.87 | 3.37 | 1.37 | 2.62 | .219 | 1.5 |
| .50 | N405-FF | N405-FFN | Metal | В | 1.25 | 3.87 | 2.75 | 1.37 | 2.62 | .219 | 1.5 |





Terms and Conditions

Balon reserves the right to change these Terms and Conditions from time to time. To view the current version, please visit Balon's website: http://www.balon.com/indexTandC.html.

Order Acceptance: Any written or oral purchase order received from Buyer by Balon Corporation ("Balon" or "Seller") shall be construed as a written acceptance of Balon's offer to sell in accordance with these Terms and Conditions of sale. Balon's acceptance of Buyer's order is expressly conditioned on Buyer's agreement to these Terms and Conditions. The terms and conditions of Balon's proposal and acknowledgment (if any), including without limitation the terms and conditions set forth below, shall prevail over any conflicting or different terms in Buyer's order. Buyer's terms of purchase will not be considered a counteroffer. All terms and conditions proposed by Buyer which are different from or in addition to these Terms and Conditions are expressly rejected by Balon and shall not become a part of Buyer's order. Balon's Terms and Conditions shall control the transaction.

Quotations, Prices and Discounts: Balon's quotations do not constitute an offer to sell. Buyer's order constitutes an offer to purchase in accordance with these Terms and Conditions. All quotations are subject to confirmation by Balon after receipt of Buyer's order. Oral or written statements, including quotations, regarding product availability or the time from receipt of order to shipment are estimates and subject to prior sale. Unless specifically stated otherwise on the quotation, prices quoted are subject to change without notice. Absent a valid quotation or written agreement between Balon and Buyer, the price in effect at the time of shipment, including any escalation formula, will apply to all sales. Unless otherwise expressly stated in writing, Balon communicates all prices in U.S. Dollars for shipment F.O.B. at Balon's plant in Oklahoma City at Buyer's expense. Unless expressly stated otherwise, quotations do not include any material certifications or documents related to traceability. Any such documents must be requested at the time of order. All published prices and discounts are subject to change without notice. While Balon Corporation strives to provide accurate product and pricing information, pricing or typographical errors may occur. In the event that Balon communicates incorrect price or incorrect information for an item Balon in its sole discretion may refuse or cancel any orders placed for that item.

Invoice Terms: Payment for all materials, products, and services at the full Invoice stated net price must be received in hand, in good funds at Balon Corporation during normal business hours within thirty (30) calendar days from the date of Invoice (the "Due Date"). The amount of each Invoice for which Balon has not received payment in hand, in good funds at Balon Corporation during normal business hours by the Due Date, shall be subject to the maximum legal interest rate per annum, or such lesser rate as Balon may determine in its sole discretion, computed daily commencing on the Due Date and continuing until Balon has received in hand, in good funds all amounts due in connection with such Invoice, including without limitation all interest accrued thereon. Balon reserves the right to impose a minimum billing charge on all sales, change orders or order supplements.

Taxes, Duties and Exports: Any tax or other charge imposed by law on the sale or production of goods or the performance of services shall be paid by the Buyer, unless the law specifically provides that such payment must be made by Balon, in which case Buyer shall reimburse Balon for such payment as part of the purchase price. Custom duties, consular fees, insurance charges, and other comparable charges will be borne solely by Buyer. Consular fees for legalizing invoices, stamping bills of lading, or other documents required by the laws of any country or destination are not included in quotations or selling prices. Balon assumes no responsibility for any fines or other charges imposed due to errors or incorrect declarations.

Literature: Published information such as catalogs, brochures, or other literature is subject to change without notice.

Transfer of Title, Risk of Loss, Freight Charges, Allowances, and Claims: All shipments are F.O.B. at Balon's plant in Oklahoma City, Oklahoma. Title and risk of loss to all goods transfer to Buyer upon Balon's tender of such goods to the carrier or shipper, regardless of who pays shipping or transportation costs. Balon will allow freight charges on orders with a minimum product weight of 1,000 pounds or more for shipment to one destination within the continental United States or Canada (excluding Alaska and Hawaii). Freight allowances are via least expensive way determined by Balon in its sole discretion. If Buyer designates a more costly transportation route or carrier, Balon shall have the right to assess a charge upon Buyer for the difference between the cost of Buyer's designated transportation route or carrier and the least expensive transportation method available to Balon. Unless requested in writing by the Buyer and acknowledged in writing by Balon, Balon does not insure shipments against damage or loss in transit. If agreed by Balon in writing, Balon will place insurance at Buyer's expense as nearly as possible in accordance with Buyer's written instructions and in such case Balon acts only as agent between the insurance company and the Buyer and assumes no liability whatsoever. Any claims for shipping loss, breakage, or damage (obvious or concealed) are Buyer's responsibility and must be made to the carrier or insurer, as applicable. All claims regarding shortages must be made to Balon in writing within thirty (30) days from receipt of shipment and must be accompanied by the packing list(s) covering the shipment.

Shipping Schedules: Shipping schedules are given as accurately as conditions permit and effort will be made to make shipments as scheduled. Balon will not be responsible for any deviations in meeting shipping schedules nor for any losses or damages (including but not limited to any consequential, exemplary, indirect, incidental, punitive, or special damages) incurred or suffered by Buyer or any third party arising out of or in connection with any deviations in the scheduled shipping of Buyer's Order. Balon shall have additional time within which to perform as may be reasonably necessary under the circumstances and shall have the right to apportion its production among its customers in such a manner as Balon deems equitable in its sole discretion.

Cancellation: Firm orders which have been accepted and entered by Balon shall not be subject to cancellation except by permission of and on the terms prescribed by Balon Corporation.

Return Policy: Products may not be returned without prior authorization from Balon. Buyer may request authorization to return eligible product to Balon within one (1) year after the date of such Buyer's original purchase from Balon. A product is no eligible for return unless it (1) has been properly stored and not previously sold by Buyer, (2) is unused, (3) is of Balon's current manufacturing design, (4) is in new condition suitable for immediate resale as determined by Balon in its sole discretion,

BALON

(5) is not designated by Balon as a special or build-to-order item, and (6) was purchased by Buyer directly from Balon. Balon generally schedules product returns on a first-come, first-served basis at a rate that allows Balon sufficient time to process each return. Costs and expenses of returning product to Balon, including freight, are the sole responsibility of Buyer. Returned product may only be exchanged for merchandize credit valid for future purchases and is not eligible for refund or cash reimbursement. All returns are final. Unused products of current manufacturing design may be returned only upon written consent of Balon's Oklahoma City office. Credit will be issued only on products which are received by Balon within one (1) year after the date of original purchase and returned by prepaid freight at Buyer's expense together with a copy of Balon's Return Authorization Form and documents which verify the original purchase order number and original invoice number. A deduction will be made for any cost incurred by Balon in restoring products to saleable condition. Credit may be used only for the purchase of merchandise and is not subject to cash reimbursement or cash payment.

Limited Warranty: Balon warrants its products against defects in material and workmanship for one (1) year from the original date of shipment. Buyer has one (1) year from the original date of shipment to notify Balon, in writing, of any alleged defect in or nonconformance of any product. Upon Balon's request, Buyer shall return the product F.O.B. to Balon's designated plant or service location at Buyer's sole cost and expense. Balon shall have no liability for removal or reinstallation of products. If, in Balon's sole judgment, the product does not conform or is found to be defective in material or workmanship, then Balon, at its sole option, shall either repair the product, replace the product, or repay to Buyer the full price paid by Buyer for such product, without interest. If any stipulated remedy shall fail in its essential purpose, Balon shall refund the purchase price of such product, without interest, as the sole and exclusive remedy for any and all claims whether in contract, strict liability, tort, or otherwise.

THIS LIMITED WARRANTY IS EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES AND REMEDIES, WHETHER EXPRESS, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR NON-INFRINGEMENT. IN NO EVENT SHALL BALON BE LIABLE FOR ANY DAMAGES OF ANY KIND OR NATURE IN EXCESS OF THE PURCHASE PRICE OF THE PRODUCT(S) ALLEGED TO BE DEFECTIVE, INCLUDING BUT NOT LIMITED TO ANY CONSEQUENTIAL, EXEMPLARY, INDIRECT, INCIDENTAL, PUNITIVE, OR SPECIAL DAMAGES, LOSS OF ANTICIPATED PROFITS, LOSS OF USE OF EQUIPMENT, OR OF ANY INSTALLATION, SYSTEM, OR FACILITY INTO OR AT WHICH BALON'S PRODUCT(S) MAY BE USED OR INSTALLED. PROVIDED, HOWEVER, BALON SHALL NOT BE RESPONSIBLE FOR ANY LOSS OR DAMAGE OF ANY KIND OR NATURE IF THE PRODUCT IS: USED IN A SERVICE OR UNDER CONDITIONS FOR WHICH IT WAS NOT MANUFACTURED; SUBJECTED TO PRESSURE IN EXCESS OF THE MAXIMUM OPERATING PRESSURE FOR SUCH PRODUCT AS DETERMINED BY BALON IN ITS SOLE DISCRETION; TAMPERED WITH OR ALTERED BY ANYONE OTHER THAN AN AUTHORIZED REPRESENTATIVE OF BALON; OR NOT MAINTAINED IN STRICT ACCORDANCE WITH BALON'S RECOMMENDED MAINTENANCE PROCEDURES.

This Limited Warranty may only be altered, amended, expanded, modified, rescinded, or terminated in writing signed by an authorized officer of Balon at its office in Oklahoma City, Oklahoma that expressly states as its purpose to amend, modify, or rescind

this Limited Warranty in whole or in part.

Not Intended for Nuclear Use: The products sold hereunder are not designed or manufactured for use in or with any atomic installation or activity.

Design Changes: Balon, in its sole discretion, shall have the right to manufacture the products provided hereunder as far in advance of its estimated shipping schedule as it deems appropriate. Balon expressly reserves the right to change or modify the design and construction of any product in the course of its manufacturing process without incurring any obligation or liability to furnish or install such changes, modifications, or improvements to products previously or subsequently sold.

Indemnification: Buyer agrees to hold Balon and its affiliates and their respective agents, directors, employees, officers, and shareholders harmless from any and all attorneys' fees, claims, damages, expert witness fees, fines, litigation costs, losses, and remediation expenses to real or personal property, arising in whole or in part from the discharge, escape, loss, or spill of hydrocarbons, hazardous waste, or other pollutants, regardless of whether such discharge, escape, loss, or spill either results from or arises out of the negligence or sole negligence of Balon, its affiliates or their respective agents, directors, employees, officers, and shareholders or results from or arises out of any defect in the design or manufacture of Balon's products or results from or arises out of a failure by Balon to warn against any foreseeable danger. Buyer acknowledges and agrees that this indemnity shall apply both to property owned or controlled by Buyer and property owned or controlled by any third party.

Modification, Rescission and Waiver: Balon's Terms and Conditions of Sale herein may only be amended, modified, or rescinded by a written instrument signed by an authorized officer of Balon at its office in Oklahoma City, Oklahoma that expressly states as its purpose to amend, modify or rescind these Terms and Conditions of Sale in whole or in part. Failure by Balon to insist in any one or more instances upon the performance of any of these Terms and Conditions of Sale or the failure of Balon to exercise any of its rights hereunder shall not be construed as a waiver or relinquishment of any such term, condition, or right hereunder and shall not affect Balon's right to insist upon strict performance and compliance with regard to any unexecuted portions of this contract or future performance of these terms and conditions. In the event an ambiguity or question of intent or interpretation arises, this Agreement shall be construed as if drafted jointly by the Parties and no presumption or burden of proof shall arise favoring or disfavoring any Party by virtue of the authorship of any of the provisions of this Agreement.

Choice of Law, Forum and Venue: These Terms and Conditions of Sale shall for all purposes be governed by and interpreted and enforced in accordance with the laws of the State of Oklahoma, without reference to or application of any conflict of laws provision which would direct the application of the law of any other jurisdiction. Buyer agrees (i) not to file or institute any action, lawsuit or proceeding asserting any claim, defense, offset, or right against Balon or any of its affiliates or any of their respective agents, directors, employees, officers, or shareholders that relates in any way to any product sold or service supplied by Balon or to these Terms and Conditions of Sale (an "Action") before any court, tribunal forum or venue other than the state or federal district courts located within Oklahoma County, Oklahoma (collectively, the "Oklahoma Courts") and (ii) to submit, without objection, in any Action to the in personam jurisdiction of the Oklahoma Courts.

We Don't Import Valves - We Make Them



We Don't Export Jobs - We Create Them



THANK YOU FOR SPECIFYING BALON VALVES.

WE ARE DEDICATED TO PROVIDING YOU WITH BEST QUALITY, VALUE AND SERVICE POSSIBLE. WE VALUE THE TRUST YOU HAVE PUT IN OUR PRODUCTS AND WE WOULD LIKE TO THANK YOU FOR THAT. YOUR FEEDBACK IS VERY IMPORTANT TO US. PLEASE CONTACT OUR OFFICE IF YOU HAVE ANY QUESTIONS OR CONCERNS.





BALON.

3245 S. Hattie Ave. Oklahoma City, OK 73129 (405) 677-3917 sales@balon.com www.balon.com

